












Outdoor



Polo

Luky



Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3.200K / 4.000K	3.200K / 4.000K
Lumens	90 lm / 96 lm	90 lm / 96 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 3.200K 3995	□ 3.200K 3999
	○ 4.000K 3996	□ 4.000K 4000
	● 3.200K 3997	■ 3.200K 4001
	● 4.000K 3998	■ 4.000K 4002
	🌈 Custom RAL	🌈 Custom RAL

Accessories



🕒 Consult delivery terms and conditions.


3 YEARS WARRANTY | 50.000 HOURS | OUTDOOR COVERED | IP 54 | 220/240 VAC | PF >0,5 | CRI ≥80 | 65° | 50/60 Hz | +50°C / -20°C | AKZO NOBEL | 1/200







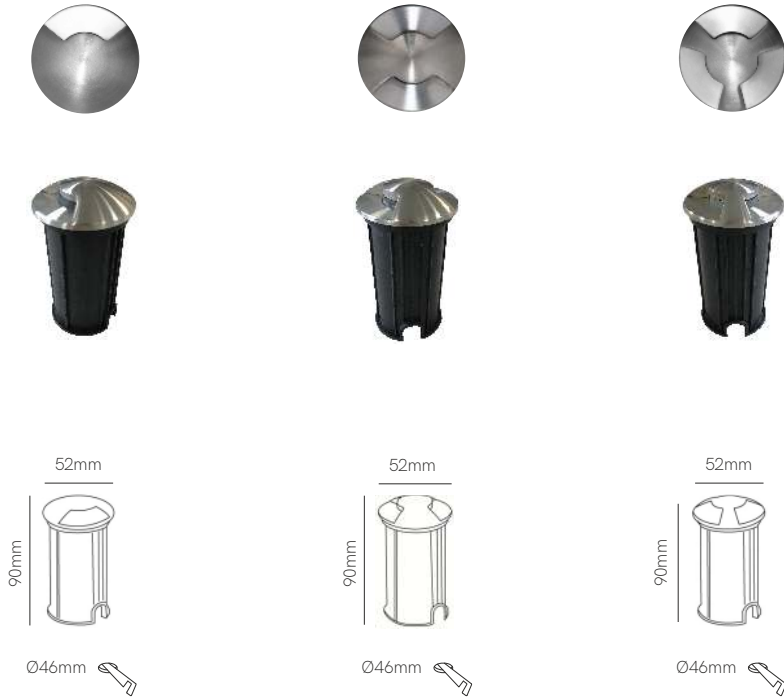

Ina

Dis

Nix















Technical Information

Power	2W	2W	2W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	55 lm	55 lm	55 lm
Material	Inox 304	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox	Brushed Inox
Code	● 4367	● 4368	● 4369
	  1.000Kg	  1.000Kg	  1.000Kg

Accessories



*Recessed box included. Integrated driver.



 3 YEARS WARRANTY |
  50.000 HOURS |
  IP 67 |
  100/240 VAC |
  PF >0,4 |
  CRI ≥80 |
  |
  CABLE 50CM |
  50/60 Hz |
  IK09 |
  +50°C / -20°C |
  1/50



Casa Patio, Gran Canaria (Spain). Architecture: Room C Studio. Building contractor: Marcelasa S.L. Photography: David Rodriguez.

Mis r wall

Mis sq wall

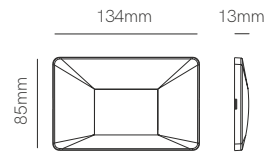

Technical Information

Power	3W	3W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	200 lm	140 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	5020	5023
	5021	5024
	5022	5025
	Custom RAL	Custom RAL



*Integrated driver.




Ⓜ Consult delivery terms and conditions.

3 YEARS WARRANTY |
 25.000 HOURS |
 IP 65 |
 220/240 VAC |
 PF >0,5 |
 CRI ≥80 |
 |
 |
 50/60 Hz |
 |
 IK06 |
 |
 +40°C |
 -20°C |
 |
 CCT SWITCH |
 |
 1/10/50



Artis r wall

Artis sq wall



Recessed box included
67mm x Ø74mm



Recessed box included
107mm x 73mm x 53mm



Surface box included
54mm x Ø80mm



Surface box included
103mm x 79mm x 57 mm



Technical Information

Power	4,5W	4,5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	130 lm	130 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White	White
Code	○ 5205	□ 5028

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



3 YEARS WARRANTY | 25.000 HOURS | → | IP 66 | 175/265 VAC | PF >0,5 | CRI ≥80 | | 120° | 50/60 Hz | | +50°C / -20°C | CCT SWITCH | 1/20




▶ VIDEO



Tween recessed

Tween surface

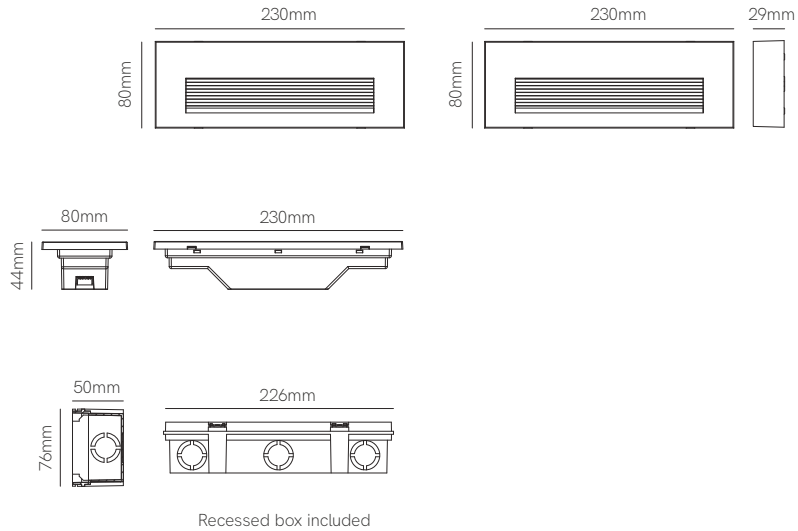



Recessed box included



Technical Information

Power	5W	5W
Installation	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	360 lm	360 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 5199 <input checked="" type="checkbox"/> 5200 <input checked="" type="checkbox"/> 5201	<input type="checkbox"/> 5196 <input checked="" type="checkbox"/> 5197 <input checked="" type="checkbox"/> 5198

Accessories




3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 110/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | IK06 | +40°C / -20°C | CCT SWITCH | 1/50



Lek sensor



 Battery powered

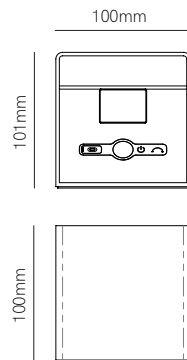

Technical Information


Power	6W
Installation	Surface
Color Temperature	3.000K
Lumens	358 lm
Material	Aluminium
Finishes	White / Black / Corten
Code	<input type="checkbox"/> 5666 <input checked="" type="checkbox"/> 5667 <input type="checkbox"/> 5668




3 YEARS WARRANTY BATTERY 1 YEAR | 30.000 HOURS | 5 HOURS | 4-24 HOURS | USB-C 5V | 4.400 mAh | OUTDOOR COVERED | IP 54 | CRI ≥80 | 100° | IK05 | DIMMABLE | +45°C | +10°C | PIR SENSOR | 1/9



Lek r wall



Lek sq wall

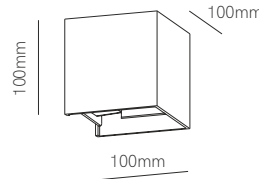


Technical Information


Power	6,8W	6,8W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm / 530 lm / 542 lm	480 lm / 530 lm / 542 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code	○	2.700K	4906	□	2.700K	4303
	○	3.000K	4907	□	3.000K	3983
	○	4.000K	4908	□	4.000K	3984
	●	2.700K	4909	■	2.700K	4304
	●	3.000K	4910	■	3.000K	3985
	●	4.000K	4911	■	4.000K	3986
	●	2.700K	4912	■	2.700K	4312
	●	3.000K	4913	■	3.000K	3987
	●	4.000K	4914	■	4.000K	3988
	🌈	Custom RAL		🌈	Custom RAL	

Accessories





🕒 Consult delivery terms and conditions.





Sphere wall



Technical Information

Power	9W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	465 lm
Material	Aluminium and glass
Finishes	White / Black

Code	○	2.700K	5333
	○	3.000K	5334
	●	2.700K	5336
	●	3.000K	5337





3 YEARS WARRANTY | 30.000 HOURS | OUTDOOR COVERED | IP 54 | → | 220/240 VAC | PF >0,6 | UGR <19 | CRI ≥90 | | 360° | 50/60 Hz | +40°C / -20°C | 1/12



▶ VIDEO



Oma

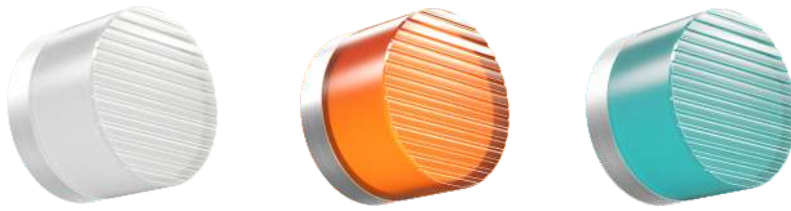


Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.000K / 2.800K / 4.000K
Lumens	○ 600lm / ● 440lm / ● 400lm
Material	Aluminium and methacrylate
Finishes	White / Amber / Turquoise

Code	○ 5381
	● 5382
	● 5383

Accessories





3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥70-80 | 110° | 50/60 Hz | IK06 | +50°C / -20°C | CCT SWITCH | 1/20



Clos wall

Clos wall dual







Technical Information

Power	8W	16W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.000 lm	2.100 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black / Corten	White / Black / Corten


Code	○ 4876	○ 4879
	● 4877	● 4880
	● 4878	● 4881



Accessories (page 695)

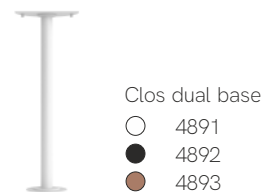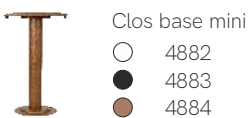



5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 175/265 VAC | PF >0,9 | CRI ≥80 | | 50/60 Hz | | +40°C / -25°C | CCT SWITCH | 1/20

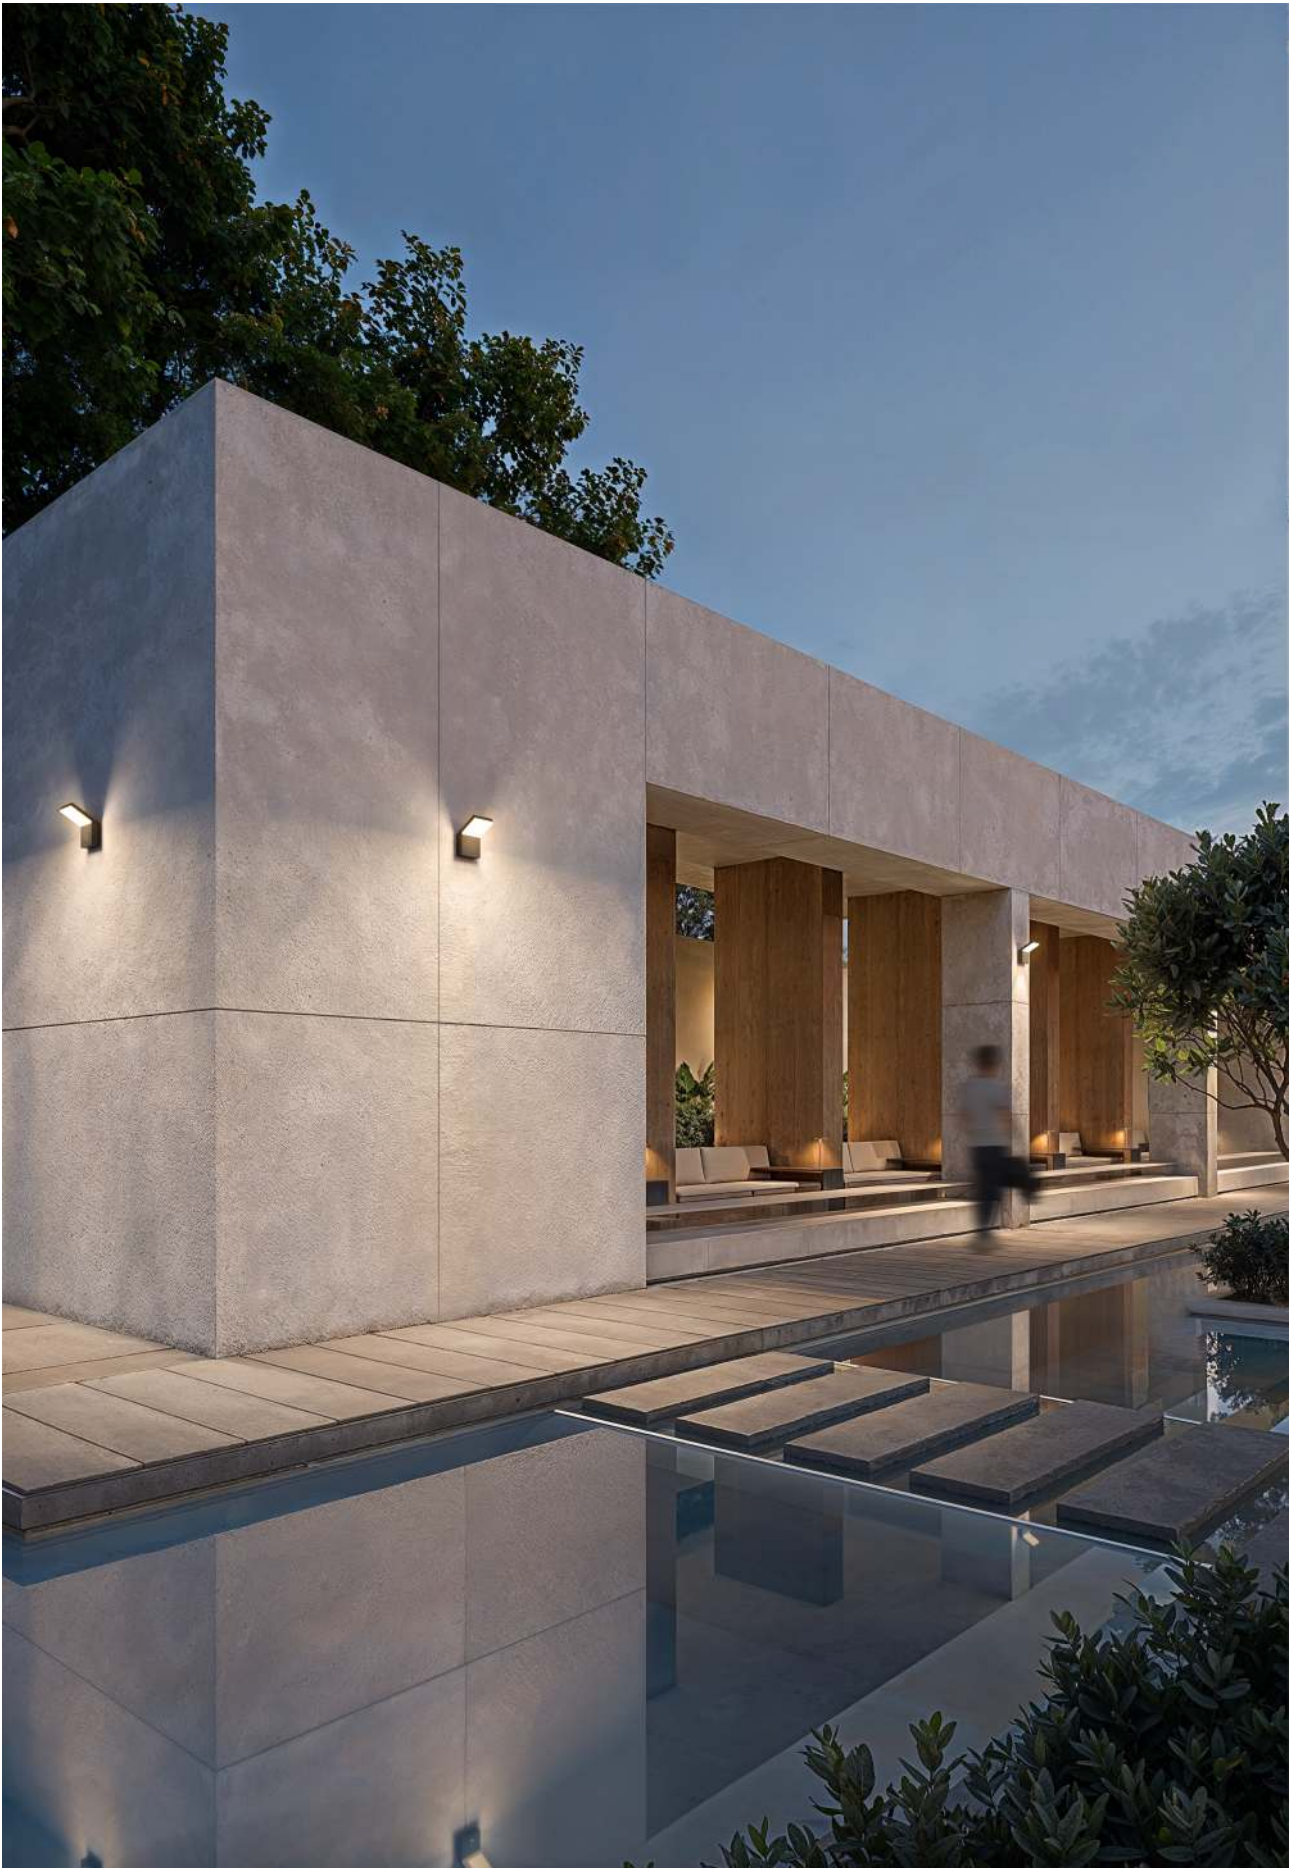

New

Neo

Neo XL



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5560 <input checked="" type="checkbox"/> 5561	<input type="checkbox"/> 5564 <input checked="" type="checkbox"/> 5565

OUTDOOR COVERED | IP 54 | 1/12

IP 65 | 1/4



3 YEARS WARRANTY | 25.000 HOURS | 100/240 VAC | PF >0,8 | → | CRI ≥80 | | 120° | 50/60 Hz | | +45°C | -25°C | CCT SWITCH | POWER 70%-100%



OUTDOOR



New

Neo sensor

Neo XL sensor



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	1.650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5562 <input checked="" type="checkbox"/> 5563	<input type="checkbox"/> 5566 <input checked="" type="checkbox"/> 5567



3 YEARS WARRANTY | 25.000 HOURS | → | 100/240 VAC | CRI ≥80 | PF >0,8 | | IP 54 | 120° | 50/60 Hz | | IK08 | | +45°C / -25°C | | PIR SENSOR | | ON OFF | | 8 sec / 8 min | | STANDBY 0%-10% | | CCT SWITCH

OUTDOOR COVERED




OUTDOOR



Mini Mac wall

Mac wall

Mac wall XL



*Included 33mm base, optional 53mm base.

Technical Information

Power	6W	15W	20W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	1.500 lm	2.000 lm
Material	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)
Finishes	White / Black / Wood / Corten	White / Black / Wood / Corten	White / Black / Wood / Corten

Code	<ul style="list-style-type: none"> ○ 4995 ● 4996 ● 4997 ● 5218 🌈 Custom RAL 	<ul style="list-style-type: none"> ○ 4998 ● 4999 ● 5000 ● 5219 🌈 Custom RAL 	<ul style="list-style-type: none"> ○ 5001 ● 5002 ● 5003 ● 5220 🌈 Custom RAL
------	--	--	--

📄 Consult delivery terms and conditions.

Accessories

53mm Mini mac base



- 5226
- 5227
- 5228
- 5229

53mm Mac base

- 5230
- 5231
- 5232
- 5233

53mm Mac XL base


- 5234
- 5235
- 5236
- 5237



3 YEARS WARRANTY |
 25.000 HOURS |
 IP 65 |
 220/240 VAC |
 PF >0,9 |
 CRI ≥80 |
 360° |
 50/60 Hz |
 IK06 |
 TRIAC DIMM |
 +40°C / -20°C |
 CCT SWITCH |
 1/10



Mac wall base



Technical Information

Power	12W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.020 lm
Material	Aluminium and Polycarbonate
Finishes	White / Black / Corten

Code	<input type="radio"/> 5264 <input checked="" type="radio"/> 5265 <input type="radio"/> 5266
------	---

Accessories

Linear Joint IP68
Ø26x95mm
■ 5671

T Joint IP68
74x118mm
■ 5672

X Joint IP68
122x122mm
■ 5673







3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 110° | 50/60 Hz | IK06 | +50°C / -20°C | CCT SWITCH | 1/6



Mini Comet

Comet



Technical Information

Power	Switch 10W / 20W	Switch 20W / 40W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	10W: 1.250 lm / 20W 2.400 lm	20W: 2.500 lm / 40W: 5.000 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 5075 <input checked="" type="checkbox"/> 5076 <input checked="" type="checkbox"/> 5113	<input type="checkbox"/> 5073 <input checked="" type="checkbox"/> 5074 <input checked="" type="checkbox"/> 5112



Accessories





3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 40°x90° | | 50/60 Hz | | +45°C / -25°C | AKZO NOBEL | CCT SWITCH | POWER SWITCH | TRIAC DIMM



Zibor

Selen




Technical Information

Power	12W	12W
Installation	Surface	Surface
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.200 lm / 1.250 lm	1.200 lm / 1.250 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black


Code	○ 3.000K 4670	○ 3.000K 4668
	○ 4.000K 4669	○ 4.000K 4667
	● 3.000K 4830	● 3.000K 4828
	● 4.000K 4829	● 4.000K 4827
	① Custom RAL	① Custom RAL

Accessories




① Consult delivery terms and conditions.


3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 120° | 50/60 Hz | IK02 | +40°C / -20°C | 1/10

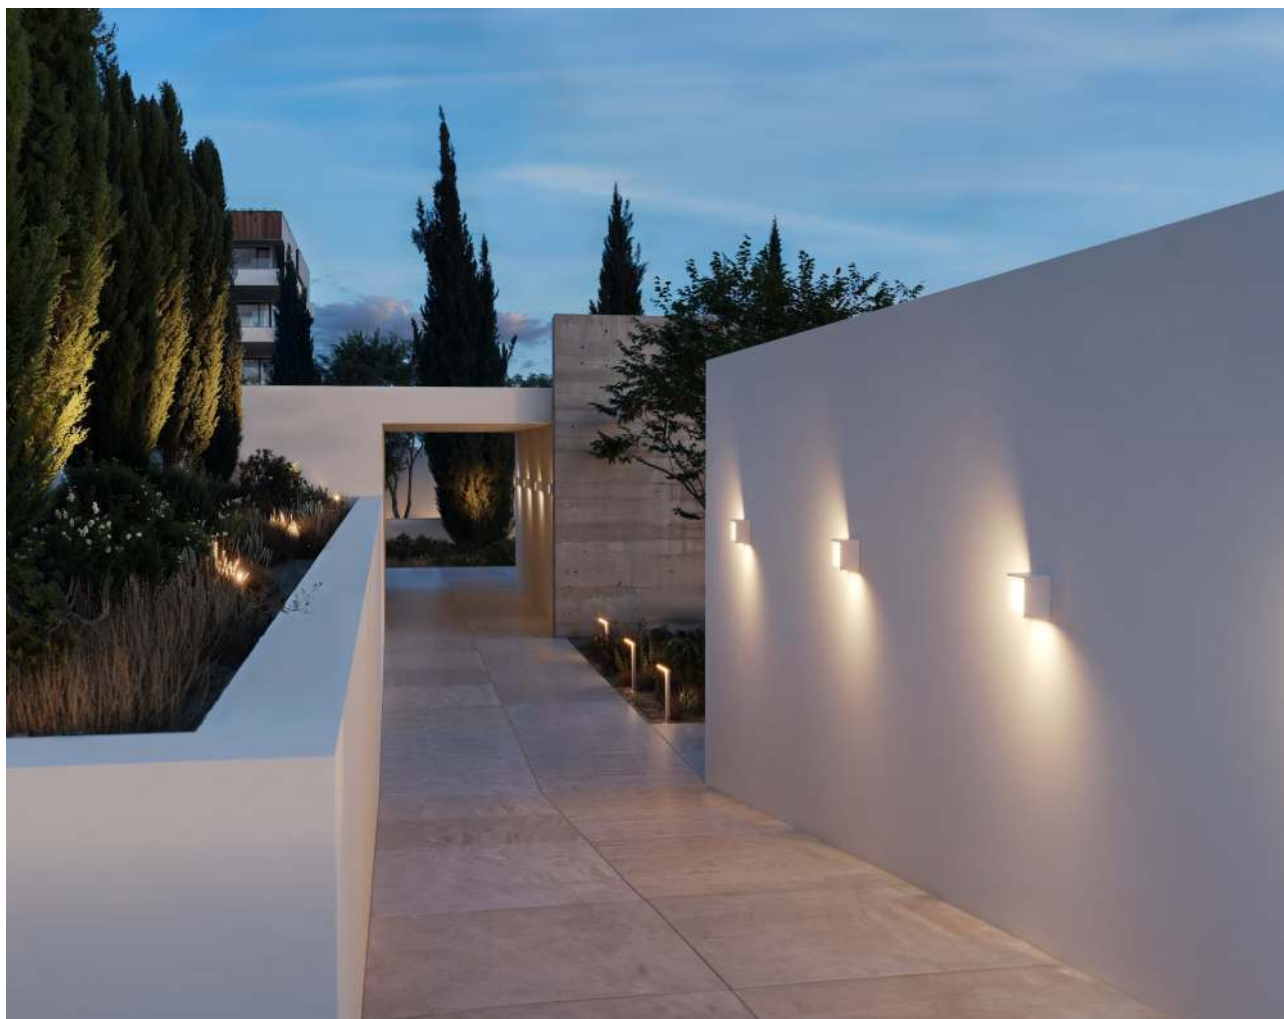



Blis r



Blis sq





Blis rect





Technical Information

Power	15W	15W	24W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.470 lm	1.370 lm	2.360 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	<ul style="list-style-type: none"> ○ 4957 ● 4958 ● 4959 	<ul style="list-style-type: none"> □ 4960 ■ 4961 ■ 4962 	<ul style="list-style-type: none"> □ 4982 ■ 4983 ■ 4984



Accessories





*IP65 connection box included.





Sunset r


Sunset sq

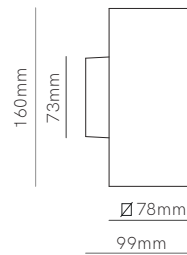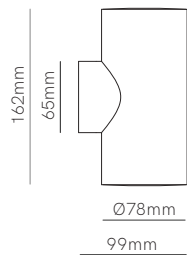

Technical Information

Power	16W	16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.800 lm	1.800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	<ul style="list-style-type: none"> ○ 4989 ● 4990 ● 4991 🌈 Custom RAL 	<ul style="list-style-type: none"> □ 4992 ■ 4993 ■ 4994 🌈 Custom RAL

Accessories





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 40° | 50/60 Hz | IK06 | +40°C / -20°C | CCT SWITCH | 1/10



Sunset XL

Sunset XL dual

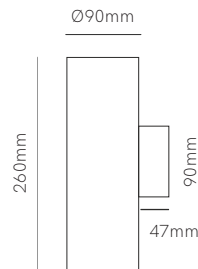


Technical Information

Power	16W	2X16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.300K / 4.000K	Switch 2.700K / 3.300K / 4.000K
Lumens	1.450 lm	2.900 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	<ul style="list-style-type: none"> ○ 5419 ● 5420 ● 5421 🌈 Custom RAL 	<ul style="list-style-type: none"> ○ 5422 ● 5423 ● 5424 🌈 Custom RAL





Accessories





3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 100/277 VAC | PF >0,9 | | | 24° | DUAL 24° | 50/60 Hz | | +50°C / -25°C |





Mini Pla



Pla





Pla XL

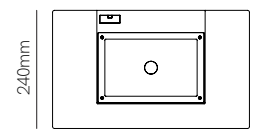

Technical Information


Power	20W	35W	35W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	900 lm	1.400 lm	1.400 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	<input type="checkbox"/> 5684 <input checked="" type="checkbox"/> 5685 <input checked="" type="checkbox"/> 5686 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5687 <input checked="" type="checkbox"/> 5688 <input checked="" type="checkbox"/> 5689 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5690 <input checked="" type="checkbox"/> 5691 <input checked="" type="checkbox"/> 5692 <input checked="" type="checkbox"/> Custom RAL
	1/10	1/10	1/6


Accessories



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 110° | 50/60 Hz | +50°C / -20°C | CCT SWITCH

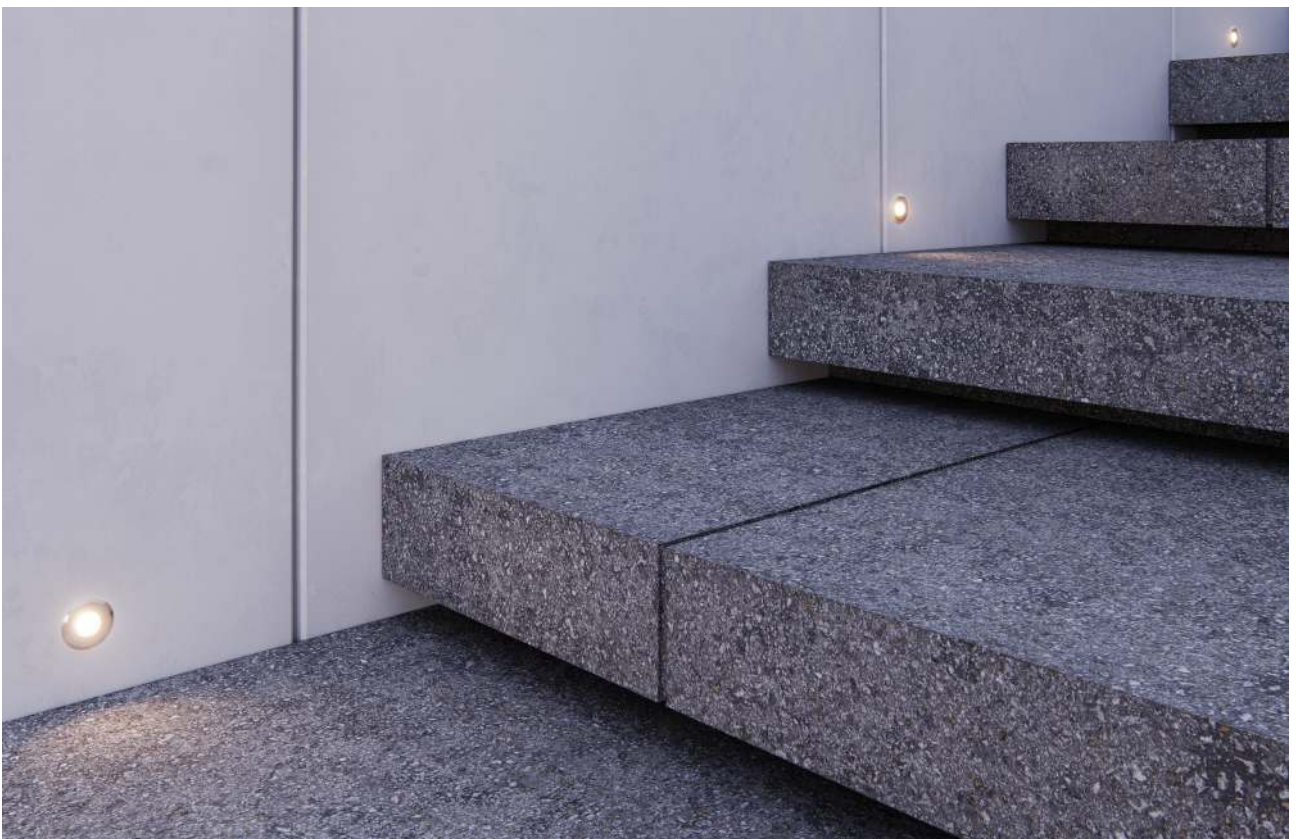

 Optic


 Technical Information

Power	2W
Installation	Recessed
Color Temperature	3.000K
Lumens	55 lm
Material	Inox 304
Finishes	Brushed silver
Code	● 4331

 Accessories


Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Recessed box included. Integrated driver.









Nano Sigma

Mini Sigma

Sigma

Sigma XL

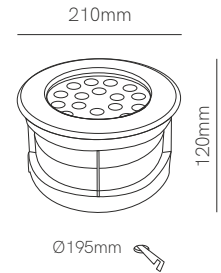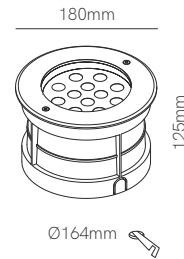


Technical Information

Power	3W	9W	12W	17W
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K	3.000K
Lumens	210 lm	450 lm	650 lm	1.440 lm
Material	Stainless steel + alumin.	Stainless steel + alumin.	Stainless steel + alumin.	Stainless steel + alumin.
Finishes	Brushed silver	Brushed silver	Brushed silver	Brushed silver

Code	● 3.000K 4251	● 3.000K 5576	● 3.000K 5577	● 3.000K 4135
	PF >0,6 1/30	PF >0,5 1/12	PF >0,9 1/8	PF >0,9 1/8

Accessories





*Integrated driver. Drainage (min. 300mm).

3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 100/277 VAC | CRI ≥80 | | CABLE 24CM | 30° | 50/60 Hz | | | +40°C / -20°C | |



Caddie

Fade

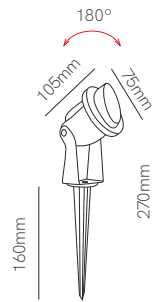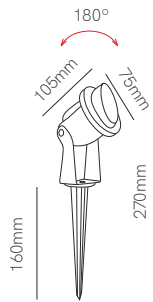

Technical Information

Power	3W	5W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	200 lm / 270 lm	350 lm / 450 lm
Material	Aluminium	Aluminium
Finishes	Black / Corten	Black / Corten
Code	<ul style="list-style-type: none"> ● 2.200K 5678 ● 3.000K 3581 ● 2.200K 5679 ● 3.000K 4923 	<ul style="list-style-type: none"> ● 2.200K 5680 ● 3.000K 3580 ● 2.200K 5681 ● 3.000K 4924
	CRI ≥80	CRI ≥90

Accessories




*Spike included.


3 YEARS WARRANTY |
 35.000 HOURS |
 IP 65 |
 100/277 VAC |
 PF >0,6 |
 CABLE 24CM |
 45° |
 50/60 Hz |
 IK05 |
 +40°C / -20°C |
 1/50



Zas r

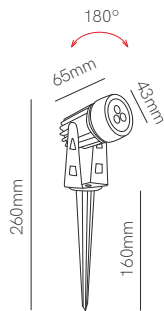

Zas sq

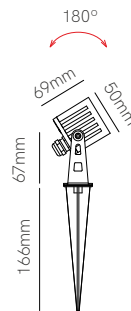

Technical Information

Power	3W	7W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	3.000K / GREEN
Lumens	200 lm / 240 lm	450 lm / 380
Material	Aluminium	Aluminium
Finishes	Black / Corten	White / Black / Corten

Code	● 2.200K 5682	□ 3.000K 4690
	● 3.000K 4134	■ 3.000K 4692
	● 2.200K 5683	■ GREEN 5694
	● 3.000K 4922	■ 3.000K 4693
	■ GREEN 5693	

100/277 VAC | 20.000 HOURS | PF >0,6 | 30° | IK05 | 220/240 VAC | 30.000 HOURS | PF >0,9 | 40° | IK08

Accessories

Linear Joint IP68
 Ø26x95mm
 ■ 5671

T Joint IP68
 74x118mm
 ■ 5672

X Joint IP68
 122x122mm
 ■ 5673



*Spike included.


3 YEARS WARRANTY | IP 65 | → | CRI ≥80 | | CABLE 24CM | 50/60 Hz | +40°C / -20°C |



▶ VIDEO



Nik



Technical Information

Power	5W
Installation	Surface
Color Temperature	3.000K / 4.000K
Lumens	340 lm / 350 lm
Material	Aluminium
Finishes	Gray
Code	<ul style="list-style-type: none"> ● 3.000K 4291 ● 4.000K 4292

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673




*Integrated driver.

3 YEARS WARRANTY | 20.000 HOURS | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥70 | ⚡ | 5° | 50/60 Hz | IK05 | +40°C / -20°C | 1/40



Signal



Technical Information

Power	9W
Installation	Floor / Tree trunk
Color Temperature	3.000K
Lumens	720 lm
Material	Aluminium
Finishes	Dark gray
Code	● 3.000K 4290





*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY | 20.000 HOURS | → | IP 65 | 100/277 VAC | PF >0,6 | CRI ≥80 | | CABLE 20CM | 30° | 50/60 Hz | | +40°C -20°C | 1/25



Sair

Sair XL

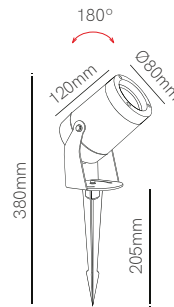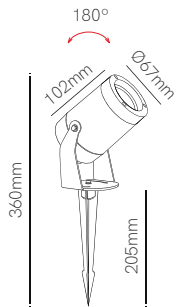


Technical Information

Power	10W	20W
Installation	Floor	Floor
Color Temperature	2.200K / 3.000K	2.200K / 3.000K
Lumens	450 lm / 900 lm	1.000 lm / 1.500 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten

Code	○ 3.000K	4894	○ 3.000K	4897
	● 2.200K	5674	● 2.200K	5676
	● 3.000K	4895	● 3.000K	4898
	● 2.200K	5675	● 2.200K	5677
	● 3.000K	4896	● 3.000K	4899

Accessories




*Spike included.

3 YEARS WARRANTY | 20.000 HOURS | → | IP 65 | 100/265 VAC | PF >0,9 | | | CABLE 24CM | 18° | 50/60 Hz | | +40°C / -20°C |



Fix

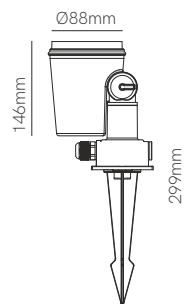

Technical Information

Installation	Floor
Material	Polypropylene
Finishes	Black
Lamp Holder	E27
Code	● 4820

Accessories



Linear Joint IP68
Ø26x95mm
■ 5671



T Joint IP68
74x118mm
■ 5672



X Joint IP68
122x122mm
■ 5673



*Spike included. Recommended lamp Par 38 (page 697).



3 YEARS WARRANTY | IP 65 |  | 50/60 Hz |  1/6



▶ VIDEO



Wech

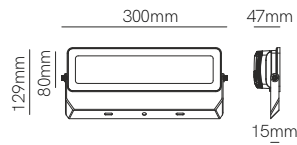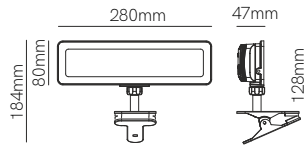


Technical Information

Power	10W
Installation	Portable
Color Temperature	Switch 3.000K / 4.000K / 5.000K
Lumens	600 lm
Material	Aluminium & Polycarbonate
Finishes	White / Black
Code	<input type="checkbox"/> 5004 <input checked="" type="checkbox"/> 5005




Clamp, lyre and charger included.





Sky 10W spike

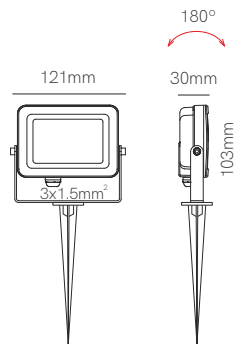

Technical Information

Power	10W						
Installation	Floor						
Color Temperature	3.000K / GREEN						
Lumens	1.000 lm / 820 lm						
Material	Aluminium						
Finishes	Corten						
Code	<table border="0"> <tr> <td>■</td> <td>3.000K</td> <td>4340</td> </tr> <tr> <td>■</td> <td>GREEN</td> <td>4341</td> </tr> </table>	■	3.000K	4340	■	GREEN	4341
■	3.000K	4340					
■	GREEN	4341					

Accessories

Linear Joint IP68
 Ø26x95mm
 ■ 5671

T Joint IP68
 74x118mm
 ■ 5672

X Joint IP68
 122x122mm
 ■ 5673





*Spike included.

5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | >1KV |

Sky 10W switch

Sky 20W switch

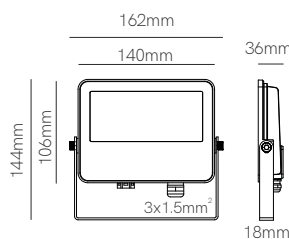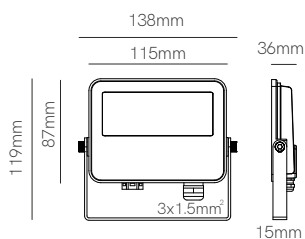

▶ VIDEO







Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.200 lm	2.400 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Gray
Code	<input type="checkbox"/> 4679 <input checked="" type="checkbox"/> 4680 <input type="checkbox"/> 4681	<input type="checkbox"/> 4682 <input checked="" type="checkbox"/> 4684





Accessories



3 YEARS WARRANTY | 25.000 HOURS | | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | CCT SWITCH | >1KV

Sky 30W switch

Sky 40W switch

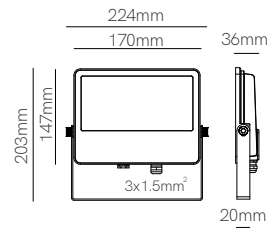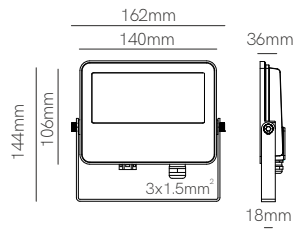

▶ VIDEO




Technical Information


Power	30W	40W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	3.600 lm	4.800 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black
Code	<input type="checkbox"/> 4685 <input checked="" type="checkbox"/> 4686 <input type="checkbox"/> 4687	<input type="checkbox"/> 4688 <input checked="" type="checkbox"/> 4689



Accessories



3 YEARS WARRANTY | 25.000 HOURS | → | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | CCT SWITCH | >1KV


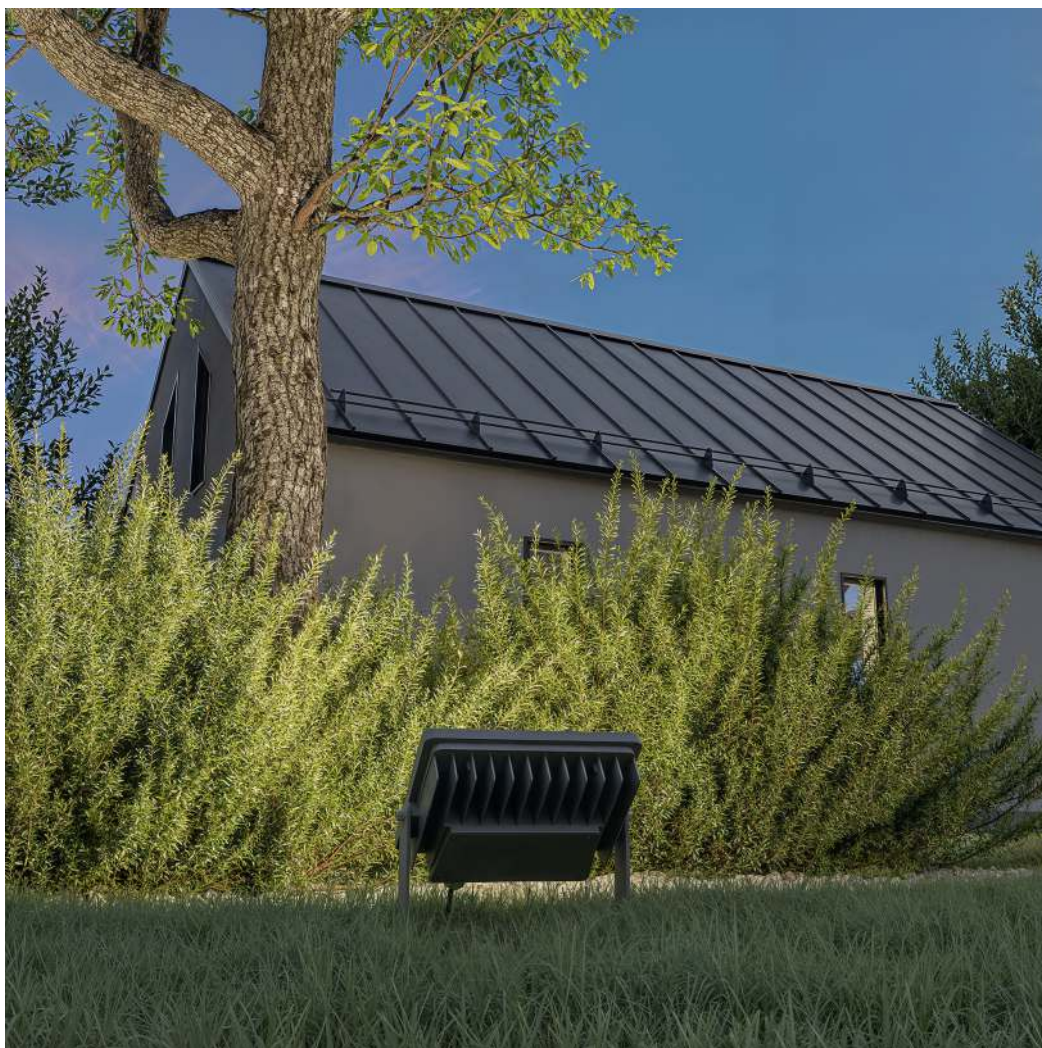




NEW

Sky 10W 4CCT

Sky 20W 4CCT

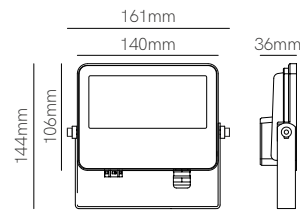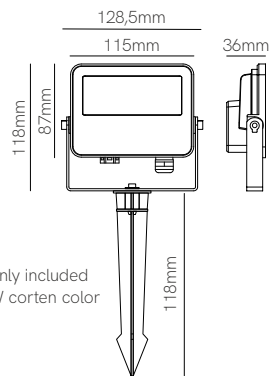

spike only included with 10W corten color



Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature (Switch)	2.700K/3.000K/4.000K/5.000K	2.700K/3.000K/4.000K/5.000K
Lumens	997 / 1.100 / 1.270 / 1.090 lm	2.080 / 2.180 / 2.480 / 2.080 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray / Corten	White / Black / Gray / Corten

Code	<input type="checkbox"/> 4679-N <input checked="" type="checkbox"/> 4680-N <input type="checkbox"/> 4681-N <input checked="" type="checkbox"/> 5729	<input type="checkbox"/> 4682-N <input checked="" type="checkbox"/> 4683-N <input type="checkbox"/> 4684-N <input checked="" type="checkbox"/> 5730
------	--	--



Accessories





5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 110° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | | >1KV

NEW

Sky 30W 4CCT

Sky 40W 4CCT

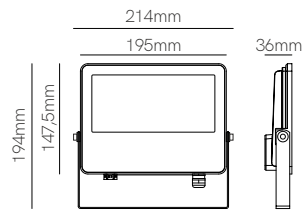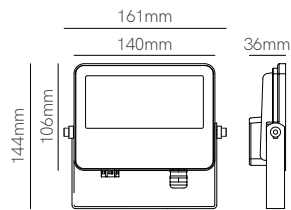

Technical Information

Power	30W	40W
Installation	Surface	Surface
Color Temperature (Switch)	2.700K / 3.000K / 4.000K / 5.000K	2.700K / 3.000K / 4.000K / 5.000K
Lumens	3.270 / 3.390 / 3.900 / 3.420 lm	4.000 / 4.840 / 4.880 / 4.080 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray / Corten	White / Black / Gray / Corten

Code	<input type="checkbox"/> 4685-N	<input type="checkbox"/> 4688-N
	<input checked="" type="checkbox"/> 4686-N	<input checked="" type="checkbox"/> 4689-N
	<input checked="" type="checkbox"/> 4687-N	<input checked="" type="checkbox"/> 4694-N
	<input checked="" type="checkbox"/> 5731	<input checked="" type="checkbox"/> 5732




Accessories




5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 180/260 VAC | PF >0,9 | CRI ≥80 | | 110° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | | >1KV




Sky 10W sensor

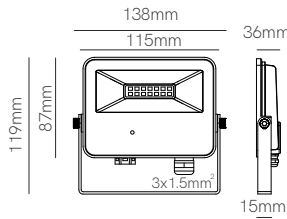

Sky 30W sensor

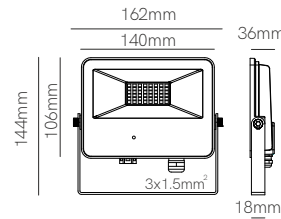

Sky 50W sensor

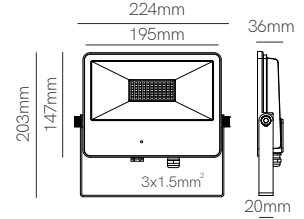

Technical Information

Power	10W	30W	50W
Installation	Surface	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K	4.000K / 5.000K
Lumens	1.150 lm / 1.200 lm	3.550 lm / 3.600 lm	5.950 lm / 6.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	<input type="checkbox"/> 4.000K 4349 <input type="checkbox"/> 5.000K 4350 <input checked="" type="checkbox"/> 4.000K 4308 <input checked="" type="checkbox"/> 5.000K 4351	<input type="checkbox"/> 4.000K 4352 <input type="checkbox"/> 5.000K 4353 <input checked="" type="checkbox"/> 4.000K 4309 <input checked="" type="checkbox"/> 5.000K 4310	<input type="checkbox"/> 4.000K 4354 <input type="checkbox"/> 5.000K 4355 <input checked="" type="checkbox"/> 4.000K 4311 <input checked="" type="checkbox"/> 5.000K 4356
------	--	--	--

1/32

1/24

1/12


Accessories

Optional spike
175mm
■ 4027-N

Linear Joint IP68
Ø26x95mm
■ 5671

T Joint IP68
74x118mm
■ 5672

X Joint IP68
122x122mm
■ 5673






5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | | 50/60 Hz | | IK08 | | +45°C / -20°C | AKZO NOBEL | MICROWAVE SENSOR | | 5 sec / 5 min | | 1m / 7m | ON / OFF | >1kV

Sky 10W

Sky 20W

Sky 30W

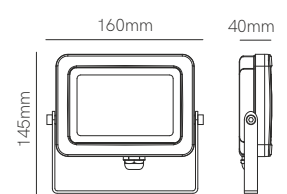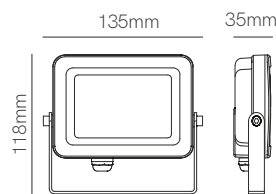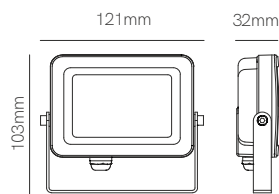

Technical Information

Power	10W	20W	30W
Installation	Surface	Surface	Surface
Color Temperature	5.000K	2.700K / 4.000K / 5.000K	2.700K / 4.000K
Lumens	1.150 lm	2.250 lm / 2.400 lm / 2.450 lm	3.450 lm / 3.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White	Black / Corten	Corten

Code	<input type="checkbox"/> 5.000K 4254	<input checked="" type="checkbox"/> 5.000K 4266 <input checked="" type="checkbox"/> 2.700K 4401 <input checked="" type="checkbox"/> 4.000K 4402	<input checked="" type="checkbox"/> 2.700K 4279 <input checked="" type="checkbox"/> 4.000K 4280
------	--------------------------------------	---	--



Accessories

Optional spike
175mm
 4027-N

Linear Joint IP68
Ø26x95mm
 5671

T Joint IP68
74x118mm
 5672

X Joint IP68
122x122mm
 5673






5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | >1KV

Sky 100W

Sky 150W

Sky 200W

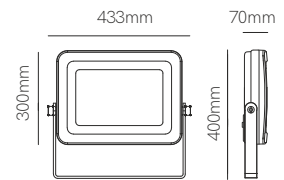
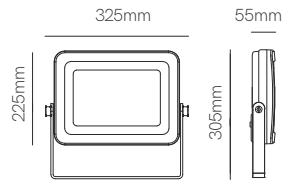


Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	2.200K	2.200K	2.200K
Lumens	7.000 lm	11.000 lm	14.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	■ 3955	■ 3956	■ 3957



Accessories



5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | >2kV









New

Polaris 100W

Polaris 150W

Polaris 200W

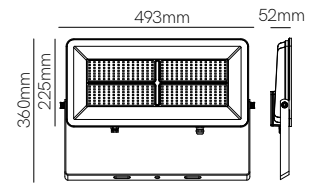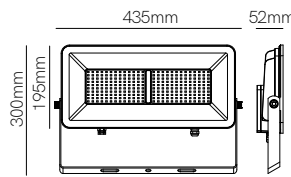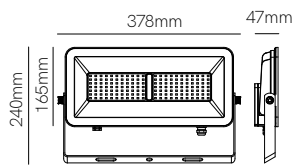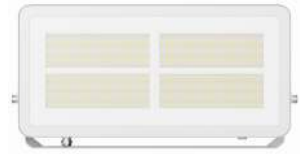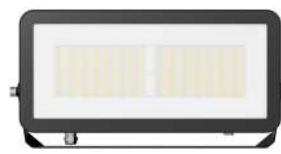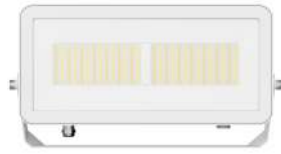

Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	12.700 lm / 13.000 lm / 13.200 lm	19.200 lm / 19.500 lm / 19.700 lm	25.700 lm / 26.000 lm / 26.200 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	<input type="checkbox"/> 5702 <input checked="" type="checkbox"/> 5698	<input type="checkbox"/> 5703 <input checked="" type="checkbox"/> 5699	<input type="checkbox"/> 5704 <input checked="" type="checkbox"/> 5700

1/4

1/3

1/3

Accessories





5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | CCT SWITCH | >6KV



Krion 300W

Krion 400W

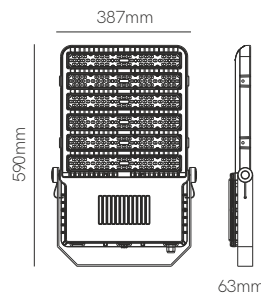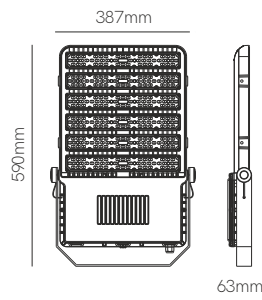

5m	10m	15m	20m
380 lx	100 lx	45 lx	25 lx

5m	10m	15m	20m
470 lx	120 lx	55 lx	30 lx



Technical Information


Power	300W	400W												
Installation	Surface	Surface												
Color Temperature	4.000K / 5.000K	4.000K / 5.000K												
Lumens	39.000 lm / 39.300 lm	52.000 lm / 52.300 lm												
Material	Aluminium	Aluminium												
Finishes	Black	Black												
Code	<table border="0"> <tr> <td>■</td> <td>4.000K</td> <td>4509</td> </tr> <tr> <td>■</td> <td>5.000K</td> <td>4511</td> </tr> </table>	■	4.000K	4509	■	5.000K	4511	<table border="0"> <tr> <td>■</td> <td>4.000K</td> <td>4510</td> </tr> <tr> <td>■</td> <td>5.000K</td> <td>4512</td> </tr> </table>	■	4.000K	4510	■	5.000K	4512
■	4.000K	4509												
■	5.000K	4511												
■	4.000K	4510												
■	5.000K	4512												

Accessories



5 YEARS WARRANTY | 50.000 HOURS | IP 65 | 100/277 VAC | PF >0,9 | CRI ≥80 | 80°x140° | 50/60 Hz | IK10 | +45°C / -25°C | AKZO NOBEL | >6KV | 1




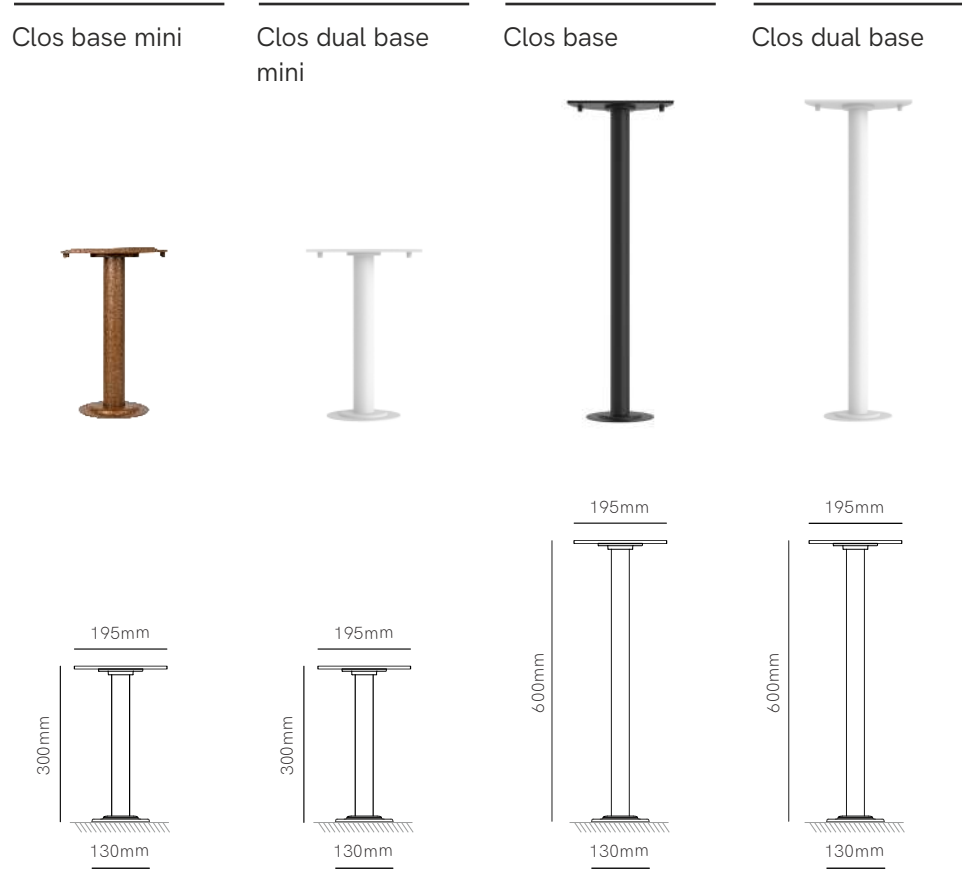

Technical Information

Installation	Floor	Floor	Floor	Floor
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	<ul style="list-style-type: none"> ○ 4882 ● 4883 ● 4884 	<ul style="list-style-type: none"> ○ 4888 ● 4889 ● 4890 	<ul style="list-style-type: none"> ○ 4885 ● 4886 ● 4887 	<ul style="list-style-type: none"> ○ 4891 ● 4892 ● 4893
	1/24	1/24	1/12	1/12

Accessories (page 639).







New

Cam

Cam XL

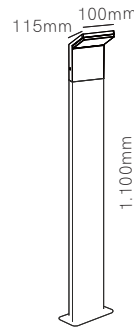

Technical Information

Power	9W	9W
Installation	Surface	Surface
Color Temperature	Switch 2.200K / 2.700K / 3.000K	Switch 2.200K / 2.700K / 3.000K
Lumens	700 lm	700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5568 <input checked="" type="checkbox"/> 5569	<input type="checkbox"/> 5570 <input checked="" type="checkbox"/> 5571
	1/4	1/2





3 YEARS WARRANTY | 25.000 HOURS | → | IP 54 | 100/240 VAC | PF >0,8 | CRI ≥80 | | 120° | 50/60 Hz | | +45°C / -25°C | CCT SWITCH | POWER 70%-100%



Mac floor

Mac floor XL

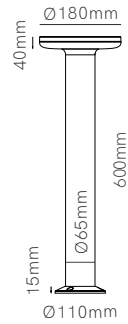


Technical Information

Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	890 lm / 900 lm	890 lm / 900 lm
Material	Aluminium and Polycarbonate	Aluminium and Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten

Code	○ 3.000K	4837	○ 3.000K	4843
	○ 4.000K	4838	○ 4.000K	4844
	● 3.000K	4839	● 3.000K	4845
	● 4.000K	4840	● 4.000K	4846
	● 3.000K	4841	● 3.000K	4847
	● 4.000K	4842	● 4.000K	4848



Accessories




3 YEARS WARRANTY | 30.000 HOURS | | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 100° | | 50/60 Hz | | +50°C / -20°C



Tura

Tura XL

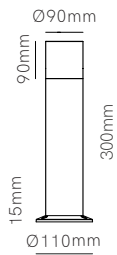

Technical Information

Power	12W	12W
Installation	Floor	Floor
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	950 lm / 960 lm	950 lm / 960 lm
Material	Aluminium and Methacrylate	Aluminium and Methacrylate
Finishes	White / Black / Corten	White / Black / Corten
Code	<ul style="list-style-type: none"> ○ 3.000K 4849 ○ 4.000K 4850 ● 3.000K 4851 ● 4.000K 4852 ● 3.000K 4853 ● 4.000K 4854 	<ul style="list-style-type: none"> ○ 3.000K 4855 ○ 4.000K 4856 ● 3.000K 4857 ● 4.000K 4858 ● 3.000K 4859 ● 4.000K 4860



Accessories




3 YEARS WARRANTY | 30.000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 180° | 50/60 Hz | | +50°C / -20°C




Linear Joint IP68



T Joint IP68



X Joint IP68



Technical Information

Material	Polyamide and Polycarbonate	Polyamide and Polycarbonate	Polyamide and Polycarbonate
Finishes	Black	Black	Black
Code	● 5671	● 5672	● 5673



3 YEARS WARRANTY | IP 68 | 16A 240 VAC | | +85°C / -45°C | 1