

SIGNAL ALUMINIUM 9W 100-240V 30° LED

**A. Product characteristics:**


1. Material: Die casting aluminum lamp body, beautiful design, solid, corrosion resistance, easy installation. 3mm thickness high quality glass, high transmittance.
2. Driver: Isolation constant-current power supply (with open circuit, short circuit, overload protection function etc.), and ensure safety of high power led light during usage.
3. LED Light source: Use the imported original led chips, high quality COB chip, greatly improving the product's brightness, low calorific value, electric light efficiency, energy saving.
4. Optical lens: COB led flood light use high-efficiency reflective cup, reflectors to make light more concentrated and bright. Conventional angle is 120°.
5. IP grade: IP65
6. Application: LED flood light is the most ideal for road dotted and indication, Widely used in parks, squares, bars, hotels, building exterior walls and so on.

**B. Installation and Usage:**

1. Fix LED flood light tightly.
2. Confirm the voltage is AC100-240V; connect lamps with wires in safe way of IP65.
3. Confirm the lamps is fixed, wire connection completely, connect to the power supply.
4. Any problem occurs during installation, please consult our technical adviser.

**C. Pay attention:**

1. Escape shock during installation and transportation.
2. Before installation to ensure that the installation position can bear 10 times the weight of the product. The place without vibration and swing, no fire hazard level also.
3. Use matched the power supply with the led flood light.
4. With precision components inside, please do not remove without permission.
5. Please send defective products back to our company for maintenance.

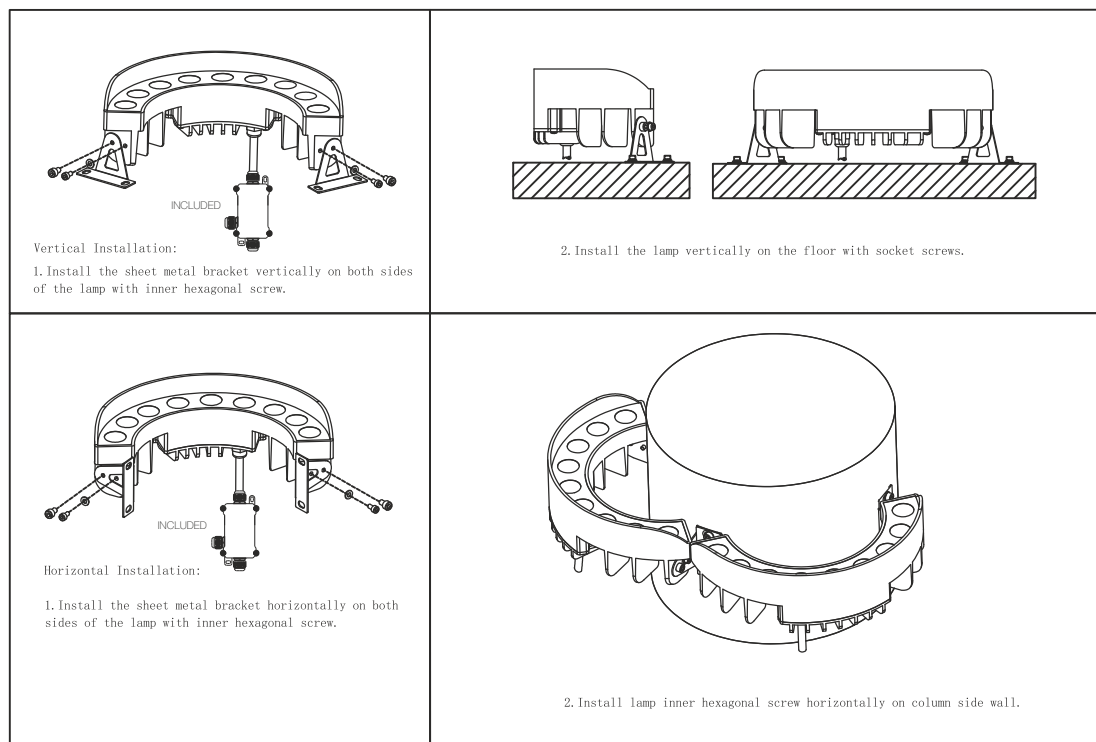

ALUMINIUM

INOX 316

IP65

CE



EMC

NOT DIMMABLE

+40°C  
-20°C

RoHS

