


Sky with spike 10W

outdoor lighting


4340 / 4341

Wire connection guide





Step One

Use screw driver remove the back cover three screws.




Step Two

Take off the back cover.




Step Three

Take off the metal screw and rubber ring.




Step Four

Put the cable into the metal screw, then put the cable into rubber ring. Connect the cable into the inside junction box.



Step Five

Fix the metal screw on cable.



Step Six

Fix the back cover screw.

1:screws. 2:the back cover. 3:the metal screw. 4:the rubber ring. 5:the inside junction box.


Note:

The brown wire is connected with the L wire of city electricity

The blue one is connected with the N wire of city electricity.

The green/yellow one is connected with the earth wire.

Power Cord type: HO5RN-F 3 x 1.5mm².

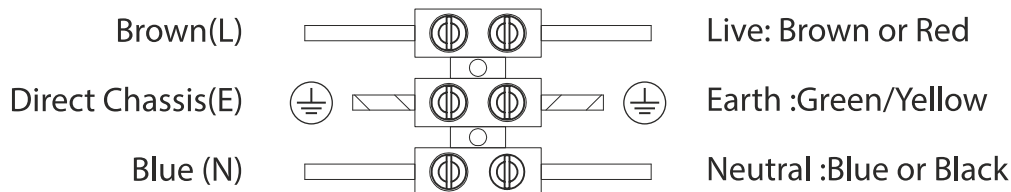

Energy efficiency class for light source is Class F