




## Proximity Sensor Switch with cct and dimmer

### Functions:

- Turn ON/OFF the light when hand pass over the sensor within 18cm.
- Input Voltage 12V-24VDC.
- Current: 4A max each channel.
- Detection Range:  $\leq 18\text{cm}$  (when there's no PC cover).
- Hold the hand over the sensor switch within 18cm more than 1 second, adjusting the double color led light brightness of one led color from 0% to 100% and of another led color from 100% to 0%; only the led color temperature is adjustable, the yellow led on the switch is flashing at the same time.
- Hold the hand over the sensor switch within 18cm more than 1 second, adjusting the brightness from 3% to 100% , only the led brightness is adjustable, the blue led on the switch is flashing at the same time.
- Switch dimming mode when hand pass over the sensor Round trip twice in 1.5 seconds.
- With 0V memory function.
- Dimension: 55\*10mm.

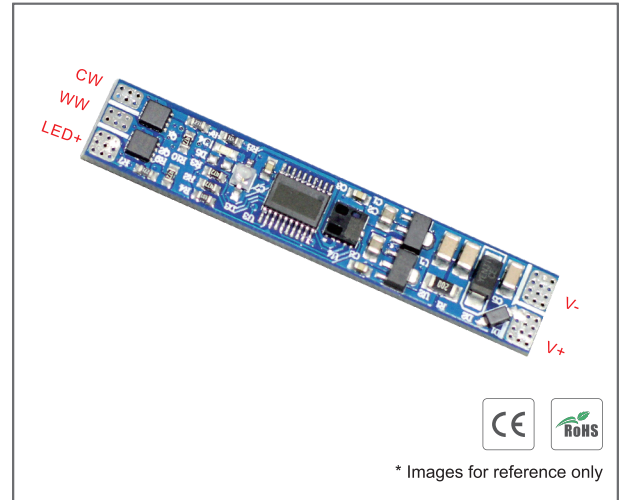

### Dimension:

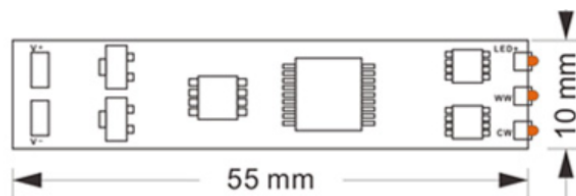

**Notice:** The distance from PC cover to the profile  $7\text{mm} \leq D \leq 50\text{mm}$ .