
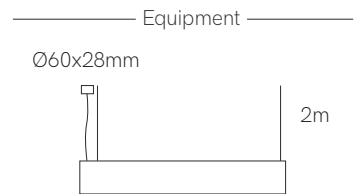


New

Evo fly

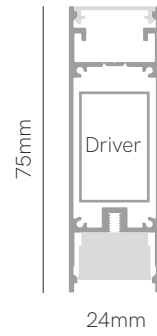

Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	44W / 55W / 66W / 77W
Lumens	4.004 lm - 9.317 lm
Installation	Pendant
Material	Aluminium
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Down Black Slats (60°)	1.120mm (44W) 4	2.700K Down (91-104 lm/W) Up (88 lm/W)	On / Off 1	White (9003) 1
	Up Opal	1.400mm (55W) 5		Dali 2	Black (9005) 2
	Down White Slats (60°)	1.680mm (66W) 6	3.000K Down (96-109 lm/W) Up (92 lm/W)	Push 3	Custom RAL C
	Up Opal	1.960mm (77W) 7		Casambi 5	
			4.000K Down (104-121 lm/W) Up (96 lm/W)		

Code: 4 ■ ■ ■ ■ ■



⊙ Consult delivery terms and conditions.
*Create your code according to your preferences.

