



Tot 40W

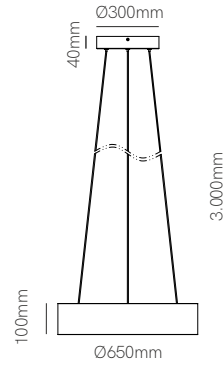

Tot 60W

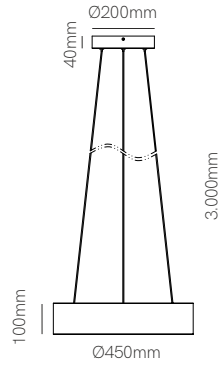

*Need Tuya Smart App to work.



Technical Information

Power	40W	60W
Installation	Surface / Pendant	Surface / Pendant
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.400 lm	5.900 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4902 <input checked="" type="checkbox"/> 4903 <input checked="" type="checkbox"/> Custom RAL <input checked="" type="checkbox"/> Electrolytic Plating	<input type="checkbox"/> 4904 <input checked="" type="checkbox"/> 4905 <input checked="" type="checkbox"/> Custom RAL <input checked="" type="checkbox"/> Electrolytic Plating

Consult delivery terms and conditions.

Accessories



*See page 8 for Gateway additional info.

*Included recessed base (not mounted) and surface base (mounted).

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | 50/60 Hz | +50°C / -20°C | |