
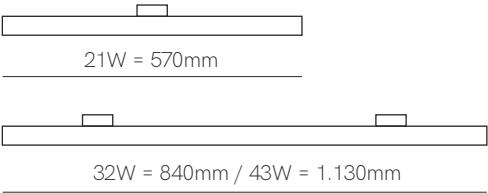



Urban track



Control accessories pages 282-289.

*Finished luminaire.

Technical Information

Power	21W / 32W / 43W
Lumens	2.352 lm - 5.848 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	UGR (78°) 4	570mm 4	2.700K (112 lm/W) - 40W/m 2	On / Off 4	White (9003) 1
	Opal (112°) 5	840mm 6	3.000K (128 lm/W) - 40W/m 3	Casambi 6	Black (9005) 2
		1.130mm 8	4.000K (136 lm/W) - 40W/m 4		Custom RAL C
			5.000K (136 lm/W) - 40W/m 5		
			2.700-5.500K (105 lm/W) - 40W/m 9		

Code: 6



Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi.

5 YEARS WARRANTY

50.000 HOURS

IP 20

UGR <19 (4)

230 VAC

PF >0,9

CRI ≥95

3,37m Max

PUSH