



Filter

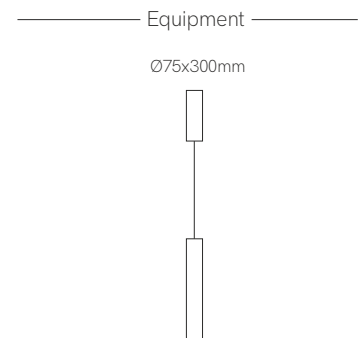

Control accessories pages 282-289.

\*Finished luminaire. Includes suspension kit, power cable and end caps.




Technical Information

Power	32W - 120W
Lumens	3.200 lm - 13.320 lm
Installation	Pendant
Material	Aluminium
Material	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code <b>3</b>	Opal (360°) <b>7</b>	800mm <b>3</b>	<b>2.700K</b> (100 lm/W) - 40W/m <b>2</b>	On / Off <b>1</b>	<input type="checkbox"/> White (9003) <b>1</b>
		1.200mm <b>5</b>	<b>3.000K</b> (105 lm/W) - 40W/m <b>3</b>	Dali <b>2</b>	<input type="checkbox"/> Black (9005) <b>2</b>
		1.600mm <b>7</b>	<b>4.000K</b> (111 lm/W) - 40W/m <b>4</b>	Push <b>3</b>	<input checked="" type="checkbox"/> Custom RAL <b>C</b>
		2.000mm <b>9</b>	<b>RGB</b> (58 lm/W) - 60W/m <b>7</b>	Casambi <b>5</b>	
				Tuya <b>7</b>	

Code: **3** **7**



Consult delivery terms and conditions.

\*Create your code according to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.

