



Forest

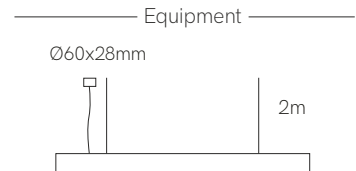

Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit and power cable.

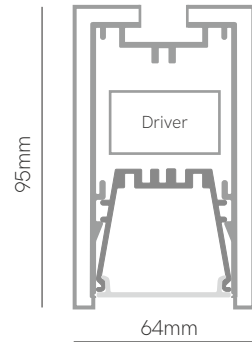

Technical Information

Power	31W / 38W / 46W / 53W
Lumens	3.472 lm - 7.208 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 4	UGR (81°) 3	1.155mm 3	2.700K (112 lm/W) - 27W/m 2	On / Off 1	⊙ Wood 8
	Opal (112°) 5	1.435mm 4	3.000K (128 lm/W) - 27W/m 3	Dali 2	
		1.715mm 5	4.000K (136 lm/W) - 27W/m 4	Push 3	
		1.995mm 6	5.000K (136 lm/W) - 27W/m 5	Casambi 5	
			2.700-5.500K (105 lm/W) - 20W/m 9	Tuya 7	

Code: **4** **8**



⊙ Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

