
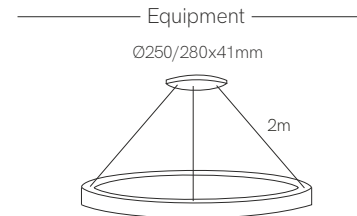


New

Zero out



Control accessories pages 282-289.

\*Finished luminaire. Includes power supply, suspension kit and power cable.




Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code <b>1</b>	Opal <b>4</b>	400mm <b>2</b>	<b>2.700K</b> (60 lm/W) - 22W/m <b>2</b>	On / Off <b>1</b>	<input type="checkbox"/> White (9003) <b>1</b>
		700mm <b>4</b>	<b>3.000K</b> (66 lm/W) - 22W/m <b>3</b>	Dali <b>2</b>	<input type="checkbox"/> Black (9005) <b>2</b>
		1.000mm <b>6</b>	<b>4.000K</b> (72 lm/W) - 22W/m <b>4</b>	Push <b>3</b> ⓘ	<input type="checkbox"/> Matt Gold <b>4</b>
		ⓘ 1.400mm <b>8</b>	<b>RGB-W</b> (50 lm/W) - 22W/m <b>8</b>	Casambi <b>5</b> ⓘ	<input type="checkbox"/> Silver <b>5</b>
			<b>2.700-5.500K</b> (70 lm/W) - 22W/m <b>9</b>	Tuya <b>7</b> ⓘ	<input type="checkbox"/> Custom RAL <b>C</b>

Code: **1** **4**



ⓘ Consult delivery terms and conditions.

\*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

