



Downlights



BENEITO FAURE

passion for led light




Kora round 20W

Kora round 25W



Technical Information



Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	<input type="checkbox"/> 4832	<input type="checkbox"/> 4500-V2



3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | IK08 | +45°C / -25°C | CCT SWITCH | 1/5



Kora square 20W

Kora square 25W




Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm	3.000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	<input type="checkbox"/> 4831	<input type="checkbox"/> 4499-V2








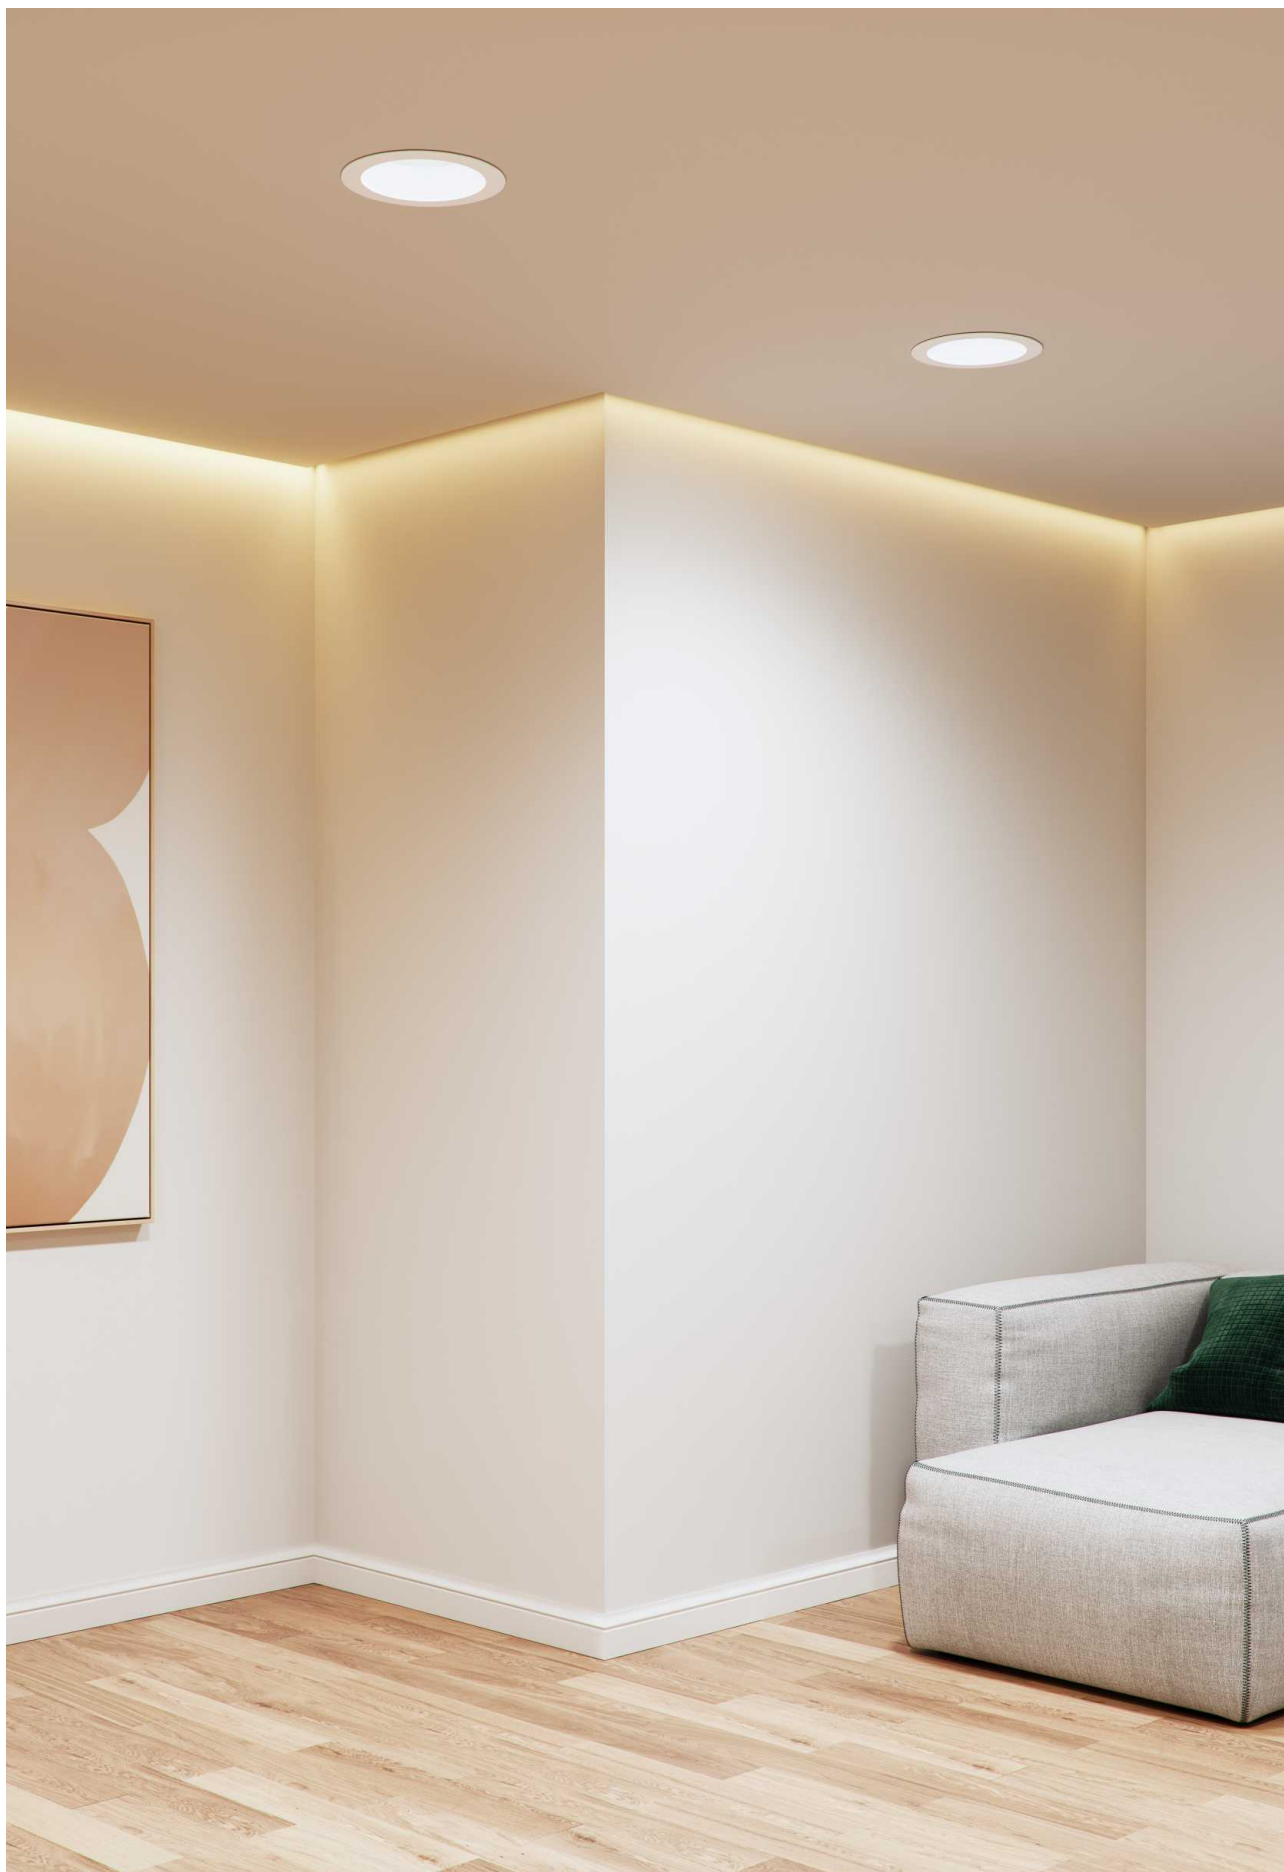

Thessis 15W

Thessis 25W

Thessis 35W



Technical Information

Power	15W	25W	35W
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm	3.100 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black	White

Code	<input type="checkbox"/> 4766	<input type="checkbox"/> 4236	<input type="checkbox"/> 5030
	<input checked="" type="checkbox"/> 4987	<input checked="" type="checkbox"/> 4988	<input checked="" type="checkbox"/> Custom RAL
	<input checked="" type="checkbox"/> Custom RAL	<input checked="" type="checkbox"/> Custom RAL	
	UGR <19	UGR <19	





^① Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | | 90° | 50/60 Hz | | | +40°C / -20°C | | | 1/6


Thesis 15W dimmable

Thesis 25W dimmable



Technical Information

Power	15W	25W
Installation	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	<input type="checkbox"/> 4767 Custom RAL	<input type="checkbox"/> 4691 Custom RAL




Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥85 | 90° | 50/60 Hz | IK06 | | TRIAC DIMM | +40°C / -20°C | CCT SWITCH | 1/6





Air switch



Technical Information



Power	22W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.200 lm
Material	Polybutylene and Polycarbonate
Finishes	White
Code	<input type="checkbox"/> 5018





Noi switch

Noi dimmable



Technical Information

Power	14W	14W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm	1.100 lm / 1.320 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	<input type="checkbox"/> 5019	<input type="checkbox"/> 3.000K 3485 <input type="checkbox"/> 4.000K 3486

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM





3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | PF >0,9 | CRI ≥80 | | 100° | 50/60 Hz | | +40°C / -20°C | 1/6



Compac round

Compac square



Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	594 lm / 607 lm / 660 lm	594 lm / 607 lm / 660 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White

Code	<input type="checkbox"/> 2.700K 3951	<input type="checkbox"/> 2.700K 3948
	<input type="checkbox"/> 3.000K 3952	<input type="checkbox"/> 3.000K 3949
	<input type="checkbox"/> 4.000K 3953	<input type="checkbox"/> 4.000K 3950
	Custom RAL	Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,5 | CRI ≥80 | | 90° | 50/60 Hz | | TRIAC DIMM | +40°C / -20°C | 1/6/30