
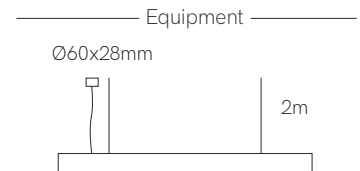


New

Evo

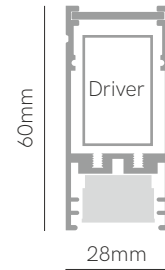

Control accessories pages 282-289.

\*Finished luminaire. Includes suspension kit, power cable and end caps.




Technical Information

Power	38W / 56W / 74W
Lumens	3.458 lm - 8.954 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code <b>2</b>	Black Slats (60°) <b>N</b>	1.170mm <b>2</b>	<b>2.700K</b> (91-104 lm/W) - 34W/m <b>2</b>	On / Off <b>1</b>	<input type="checkbox"/> White (9003) <b>1</b>
	White Slats (60°) <b>P</b>	1.730mm <b>4</b>	<b>3.000K</b> (96-109 lm/W) - 34W/m <b>3</b>	Dali <b>2</b>	<input checked="" type="checkbox"/> Black (9005) <b>2</b>
		2.290mm <b>6</b>	<b>4.000K</b> (103/121 lm/W) - 34W/m <b>4</b>	Push <b>3</b> ⓘ	<input checked="" type="checkbox"/> Custom RAL <b>C</b>
				Casambi <b>5</b>	

Code: **2**



ⓘ Consult delivery terms and conditions.  
\*Create your code according to your preferences.

