


New

Evo dual

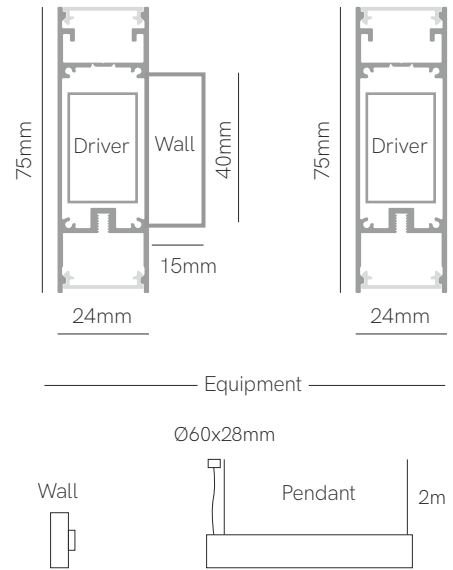

Control accessories pages 282-289.

*Finished luminaire. Includes power cable and end caps.




Technical Information

Power	49W / 61W / 73W / 86W
Lumens	5.145 lm - 11.696 lm
Installation	Pendant / Wall
Material	Aluminium
PCB	Flex

Code	Installation	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Pendant 3	1.120mm (49W) 4	Down-Up 2.700K (124 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
	Wall 7	1.400mm (61W) 5	Down-Up 3.000K (128 lm/W) 3	Dali 2	<input type="checkbox"/> Black (9005) 2
		1.680mm (73W) 6	Down-Up 4.000K (136 lm/W) 4	Push 3	<input checked="" type="checkbox"/> Custom RAL C
		1.960mm (86W) 7	Down-Up RGB-W (100 lm/W) 8	Casambi 5	
			Down-Up 2.700-5.500K (105 lm/W) 9	Tuya 7	
			Down 2.700K Up RGB-W D		
			Down 3.000K Up RGB-W T		
			Down 4.000K Up RGB-W Q		

Code: **5**



Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

