
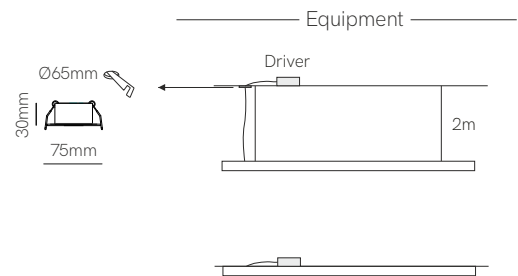


New

Minimus



Control accessories pages 282-289.

\*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.



Technical Information

Power	25W / 31W / 37W / 43W
Lumens	2.425 lm - 4.644 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code <b>5</b>	Opal prism (100°) <b>8</b>	1.170mm <b>2</b>	<b>2.700K</b> (97 lm/W) - 22W/m <b>2</b>	On / Off <b>1</b>	<input type="checkbox"/> White (9003) <b>1</b>
		1.420mm <b>4</b>	<b>3.000K</b> (103 lm/W) - 22W/m <b>3</b>	Dali <b>2</b>	<input checked="" type="checkbox"/> Black (9005) <b>2</b>
		1.720mm <b>6</b>	<b>4.000K</b> (108 lm/W) - 22W/m <b>4</b>	Push <b>3</b>	<input type="checkbox"/> Custom RAL <b>C</b>
		1.970mm <b>8</b>		Casambi <b>5</b>	
				Tuya <b>7</b>	

Code: **5** **8**



ⓘ Consult delivery terms and conditions.  
\*Create your code according to your preferences.

