





# Technical

**BENEITO FAURE**  
passion for led light

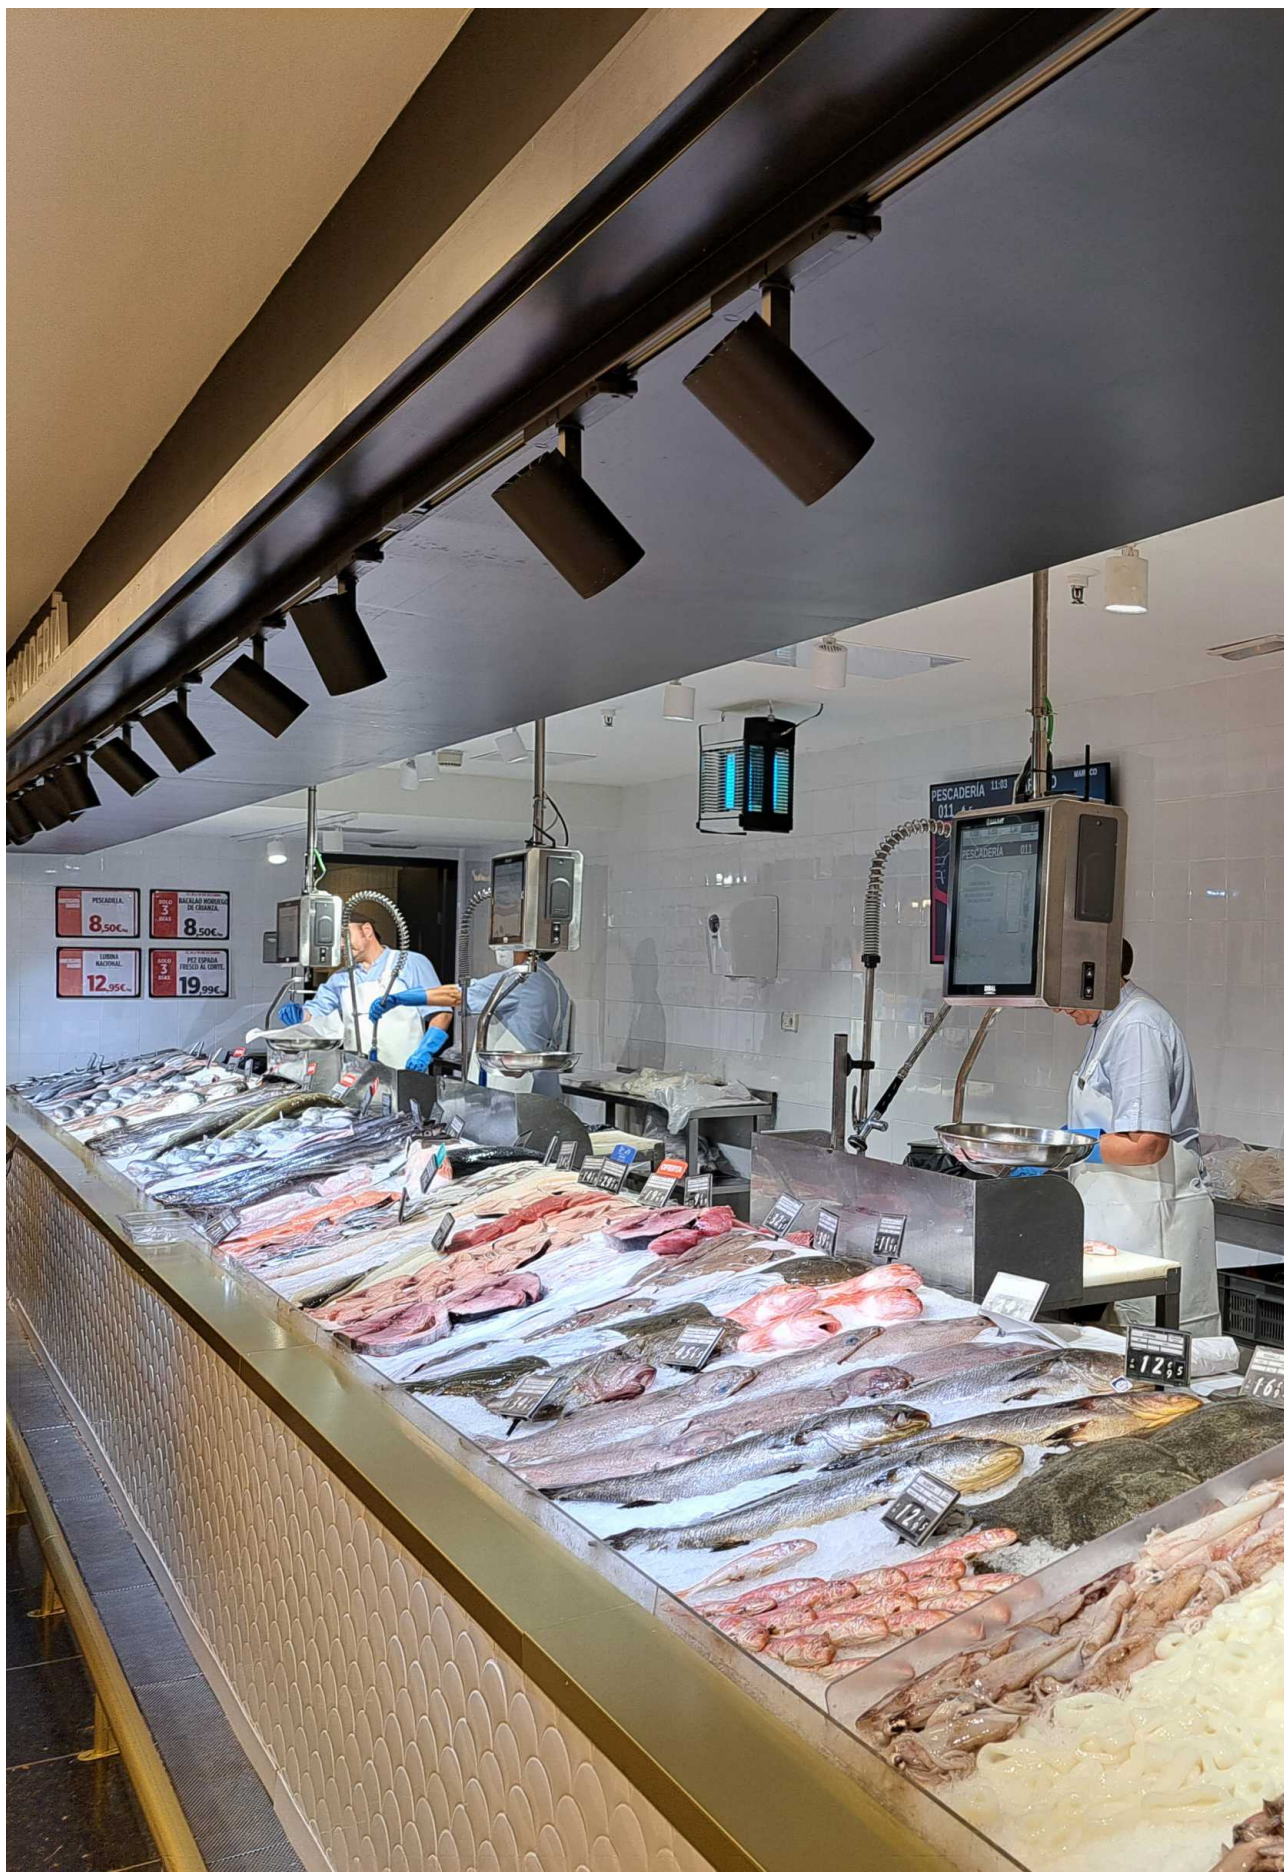

New

Lonja

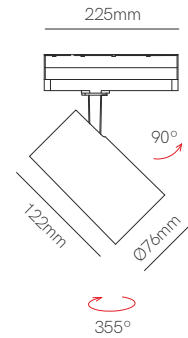

Technical Information

Power	22W
Lumens	1.628 lm - 2.662 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)


Code	Diffuser (Angle)	Size	CCT (Lm)	Driver	Colour
Code <b>3</b>	Transparent (15°) <b>1</b>	<b>9</b>	<b>FISH - 5.500K</b> 2.662 lm <b>1</b>	On/Off <b>1</b>	<input type="checkbox"/> White <b>1</b>
	Transparent (24°) <b>6</b>		<b>3.000K</b> 2.100 lm <b>3</b>	Triac <b>4</b>	<input checked="" type="checkbox"/> Black <b>2</b>
	Transparent (36°) <b>8</b>		<b>4.000K</b> 2.206 lm <b>4</b>		<input type="checkbox"/> Custom RAL
			<b>MEAT R - 1.950K</b> 1.650 lm <b>5</b>		
			<b>FRUIT - 2.700K</b> 2.310 lm <b>6</b>		
			<b>WINE/CHEESE - 2.700K</b> 2.464 lm <b>7</b>		
			<b>BREAD - 2.400K</b> 2.464 lm <b>8</b>		
			<b>MEAT M - 3.500K</b> 1.628 lm <b>9</b>		

Code: **3**  **9**

\*Create your code according to your preferences.


Consult delivery terms and conditions.

Accessories



Honeycomb anti-glare

40111







5 YEARS WARRANTY | 50.000 HOURS | → | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥90 | 3.000K 4.000K | | 15° 24° 36° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | 1



Beneito Faure, La Roca del Valles (Spain).

Sono 40W

Sono 60W



\*Need Tuya Smart App to work.




Technical Information

Power	40W	60W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Tuya 2.600K - 4.000K	Tuya 2.600K - 4.000K
Lumens	3.130 lm	4.390 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4946 <input checked="" type="checkbox"/> 4947 <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 4950 <input checked="" type="checkbox"/> 4951 <input type="checkbox"/> Custom RAL

Consult delivery terms and conditions.

Accessories





\*See page 8 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥98 | 30° | 50/60 Hz | IK06 | +45°C / -15°C | tuya | 1/4






Power and CTT switch

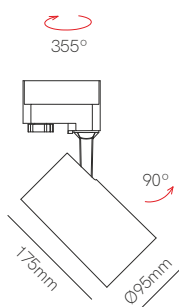

Technical Information

Power	Switch 15W / 20W / 25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	<input type="checkbox"/> 4900 <input type="checkbox"/> 4901 <input checked="" type="checkbox"/> Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | ⚡ | 15° - 55° | 50/60 Hz | IK06 | +45°C / -20°C | CCT SWITCH | POWER SWITCH | 1/10












New

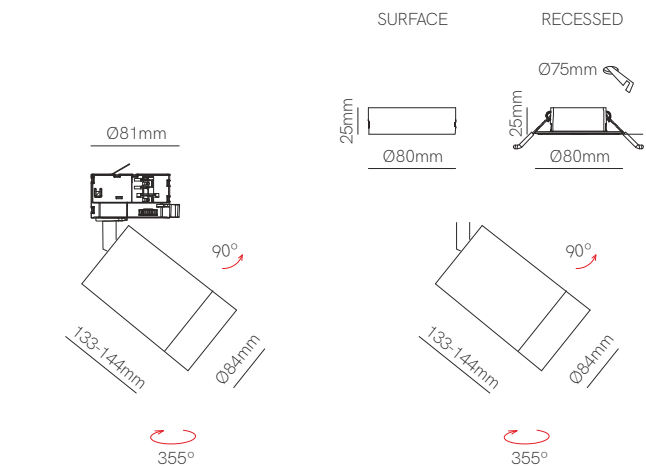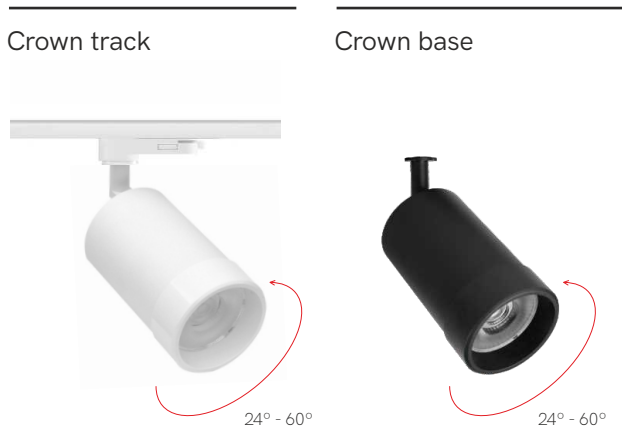

Technical Information

Power	25W	25W
Installation	Three Phase Track	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.625 lm	1.625 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5221 <input checked="" type="checkbox"/> 5222	<input type="checkbox"/> 5224 <input checked="" type="checkbox"/> 5225




Base version includes surface and recessed base (not mounted).

3 YEARS WARRANTY | 25.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 24° - 60° | 50/60 Hz | +40°C / -20°C | CCT SWITCH | 1/20




Lena

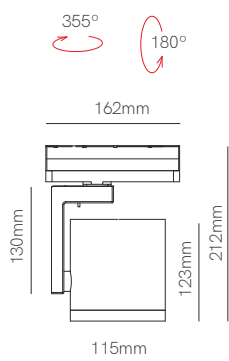

Technical Information

Power	35W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	4.200 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 4449-V2 <input type="checkbox"/> 4450-V2 <input checked="" type="checkbox"/> Custom RAL
------	--




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH |



Óptica Rapp , La Laguna, Tenerife (Spain). Design: Grupo Gobarq. Photography: Kuo estudio.


Aston

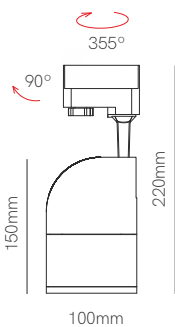

Technical Information

Power	20W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.400 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 4439
	<input checked="" type="checkbox"/> 4440
	Custom RAL




Consult delivery terms and conditions.

3 YEARS WARRANTY | 
 30.000 HOURS | 
 → | 
 IP 20 | 
 220/240 VAC | 
 UGR <19 | 
 PF >0,9 | 
 CRI ≥80 | 
 | 
 15° / 38° / 60° | 
 50/60 Hz | 
 +40°C / -15°C | 
 CCT SWITCH | 
 1/8






Konic dimmable

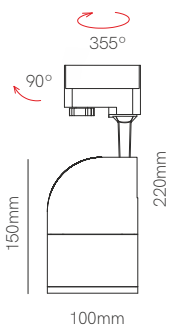

Technical Information

Power	30W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.440 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 4985
	<input checked="" type="checkbox"/> 4986
	Custom RAL



Consult delivery terms and conditions.




3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥94 | | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | +40°C -15°C | CCT SWITCH | 1/8



Kom 20W

Kom 30W

Kom 40W

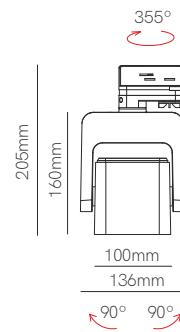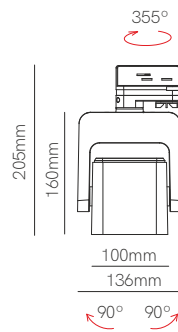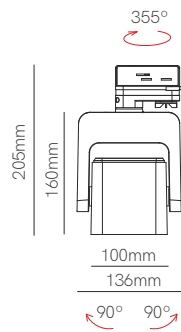

Technical Information


Power	20W	30W	40W
Installation	Three Phase Track	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	2.300 lm	2.470 lm	4.500 lm / 4.600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	<input type="checkbox"/> 4337	<input type="checkbox"/> 4336-N	<input type="checkbox"/> 3.000K 4444
	<input checked="" type="checkbox"/> 4339	<input checked="" type="checkbox"/> 4338-N	<input type="checkbox"/> 4.000K 4445
	Custom RAL	Custom RAL	<input checked="" type="checkbox"/> 3.000K 4447
			<input checked="" type="checkbox"/> 4.000K 4448
			Custom RAL

CRI ≥80 | CCT SWITCH

CRI ≥94 | CCT SWITCH

CRI ≥80



Consult delivery terms and conditions.



3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | | 15°/24°/40° | 50/60 Hz | +50°C / -20°C | AKZO NOBEL | 1/10



Tram 20W



Tram 30W

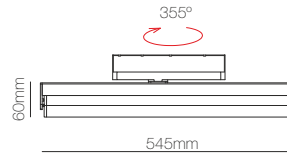

Technical Information

Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	3.000K / 4.000K	3.000K / 4.000K
Lumens	2.320 lm / 2.400 lm	3.520 lm / 3.600 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 3.000K 4427	<input type="checkbox"/> 3.000K 4541
	<input type="checkbox"/> 4.000K 4428	<input type="checkbox"/> 4.000K 4542
	<input checked="" type="checkbox"/> 3.000K 4429	<input checked="" type="checkbox"/> 3.000K 4543
	<input checked="" type="checkbox"/> 4.000K 4430	<input checked="" type="checkbox"/> 4.000K 4544

5 YEARS WARRANTY


3 YEARS WARRANTY



30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +45°C / -20°C | 1/10



Alfa

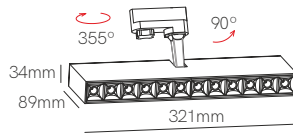

Technical Information

Power	32W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	3.100 lm / 3.200 lm / 3.250 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 2.700K 4038
	<input type="checkbox"/> 3.000K 4039
	<input type="checkbox"/> 4.000K 4040
	<input checked="" type="checkbox"/> 2.700K 4176
	<input checked="" type="checkbox"/> 3.000K 4177
	<input checked="" type="checkbox"/> 4.000K 4178



5 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C / -10°C | AKZO NOBEL | 1/10








Piccolo track



Piccolo base

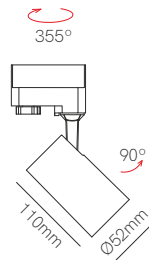

Technical Information

Power	9,5W	9,5W
Installation	Three Phase Track	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm	1.300 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4437 <input type="checkbox"/> 4438 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4833 <input type="checkbox"/> 4834 <input checked="" type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.  
\*Surface and recessed base included with Piccolo base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15°/38°/60° | 50/60 Hz | +50°C / -20°C | CCT SWITCH | AKZO NOBEL | 1/20

Piccolo GU10 track V3

Piccolo GU10 base

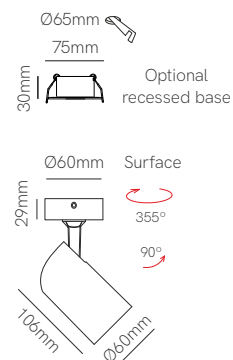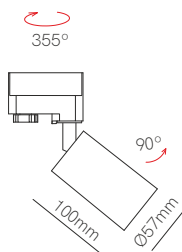


Technical Information

Installation	Three Phase Track	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 3990-V3 <input checked="" type="checkbox"/> 3989-V3 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4050 <input checked="" type="checkbox"/> 4049 <input checked="" type="checkbox"/> Custom RAL
	3 YEARS WARRANTY   1/20	5 YEARS WARRANTY   1/40

ⓘ Consult delivery terms and conditions.

Accessories




\*GU10 bulbholder included.

IP 20 | 220/240 VAC | AKZO NOBEL



Piccolo AR111 track

Piccolo AR111 base


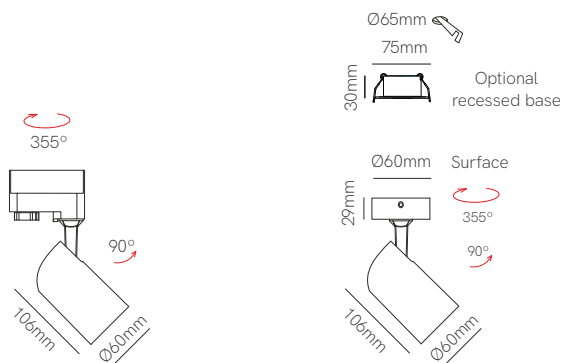


Technical Information

Installation	Three Phase Track	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White	White
Code	<input type="checkbox"/> 4435 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4433 <input checked="" type="checkbox"/> Custom RAL

Consult delivery terms and conditions.


Accessories



\*GU10 bulbholder included.


5 YEARS WARRANTY | IP 20 | 220/240 VAC | AKZO NOBEL | 1/40



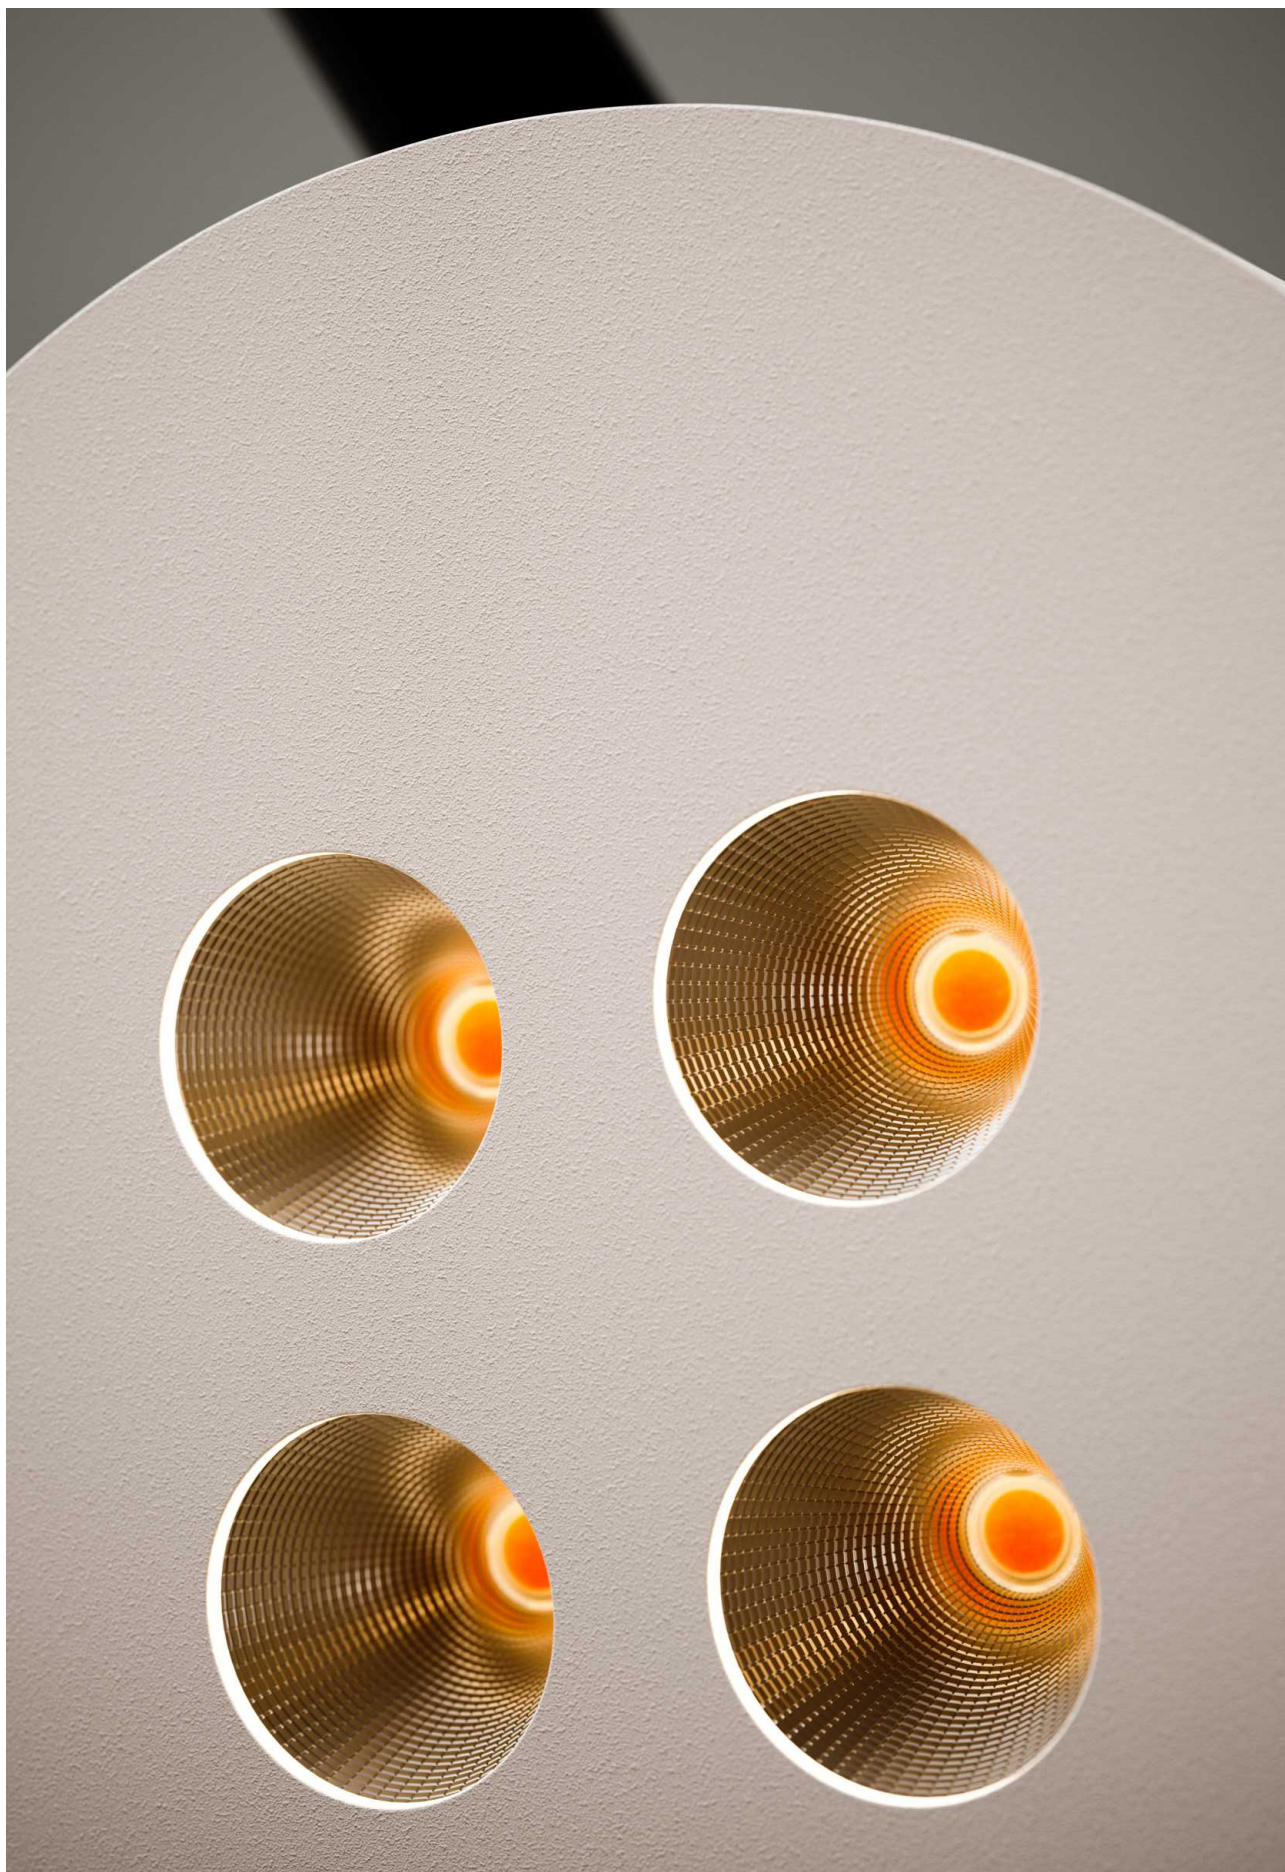


New

Cookie three phase track

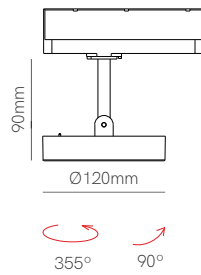



Technical Information

Power	12W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black
Code	<input type="checkbox"/> 5179 <input type="checkbox"/> 5180




3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 38° | 50/60 Hz | TRIAC DIMM | +40°C / -20°C | CCT SWITCH | 1/20

# Three phase track surface accessories

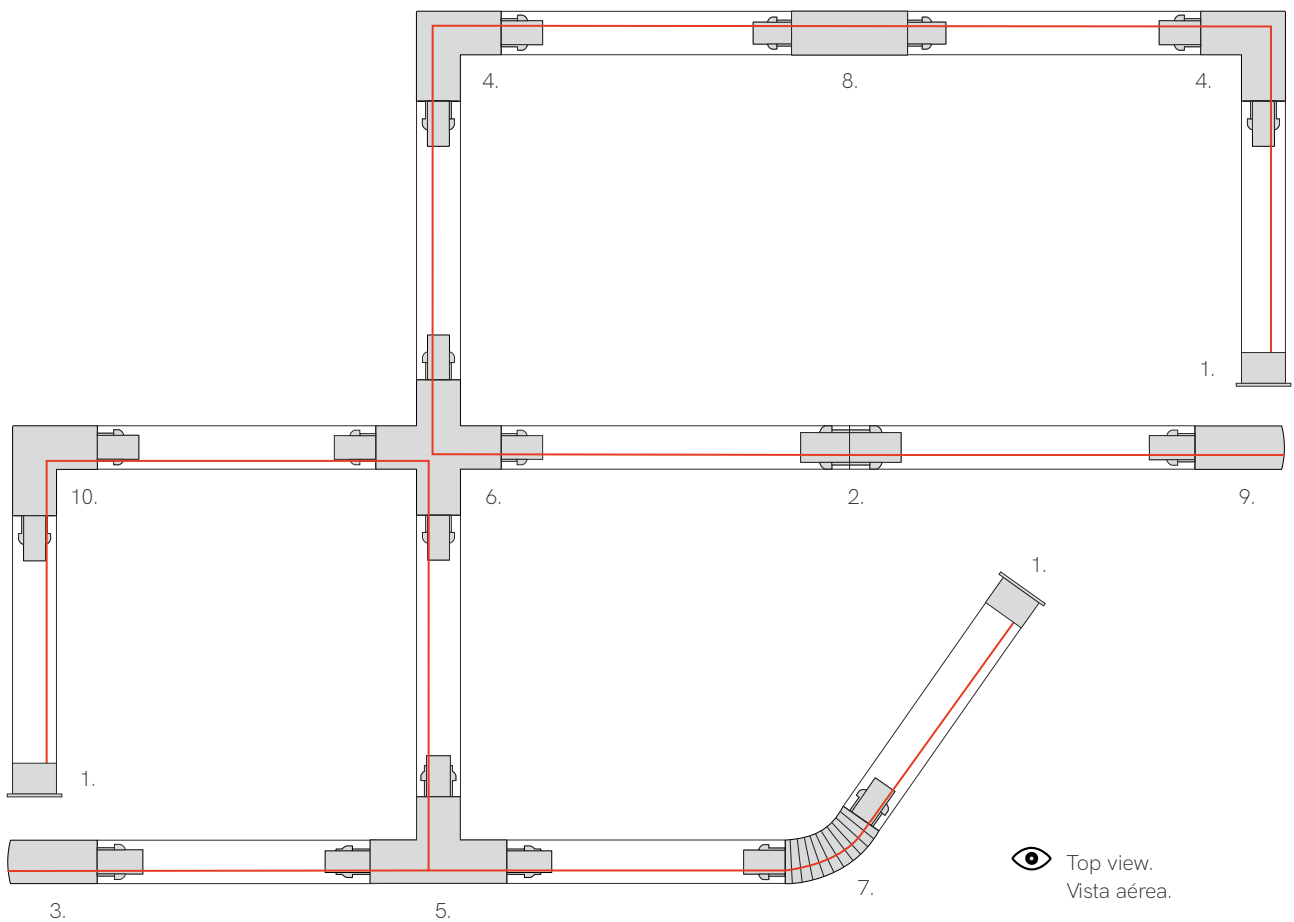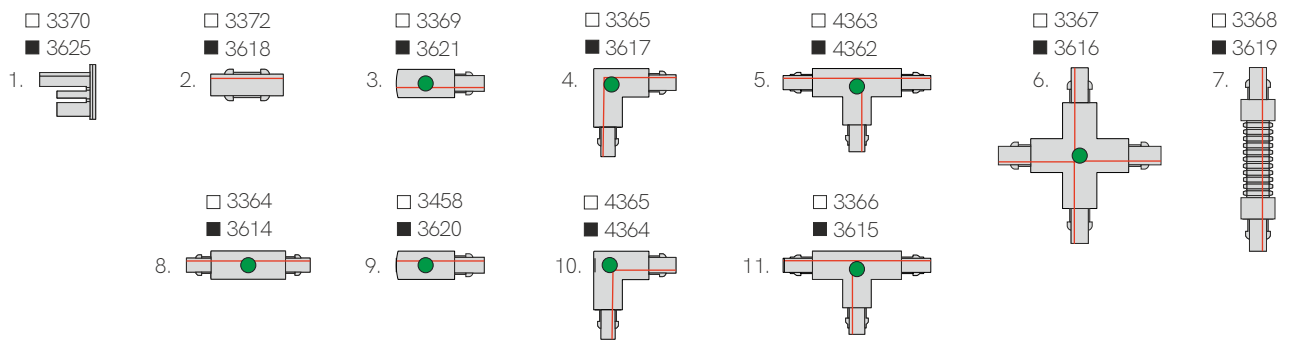

● Allows power input



3 YEARS WARRANTY | IP 20





**Three phase track surface**

L: 32mm H: 31mm

1m 3795

2m 3796

3m 3797

1m D-3626

2m D-3627

3m D-3628

\*End cap and power supply included



**Track ceiling surface**

L: 30mm W: 25mm H: 12mm

3373

3623



**Track power supply surface**

L: 98mm W: 32mm H: 32mm

Left 3369

Right 3458

Left 3621

Right 3620



**Joint track without spacing**

L: 68mm W: 25mm H: 27mm

3372

3618



**Joint track with spacing surface**

L: 166mm W: 35mm H: 32mm

3364

3614



**L Joint track surface**

L: 100mm W: 66mm H: 32mm

Left 4365

Right 3365

Left 4364

Right 3617



**T Joint track surface**


L: 166mm W: 100mm H: 32mm

Left 4363

Right 3366

Left 4362

Right 3615



**X Joint track surface**

L: 166mm W: 166mm H: 32mm

3367

3616



**Flexible joint track**

L: 245mm W: 35mm H: 32mm

3368

3619



**End cap**

L: 32mm W: 32mm H: 32mm

3370

3625



**Three phase adapter**

L: 70mm W: 40mm H: 41mm

3371-V2

3624-V2



**Suspension kit**

L: 3.000mm W: Ø35 | Ø2.4 H: 47mm

3459

3622



**Three phase surface base**



L: Ø100mm H: 32mm

4700


4701



# Three phase track recessed accessories

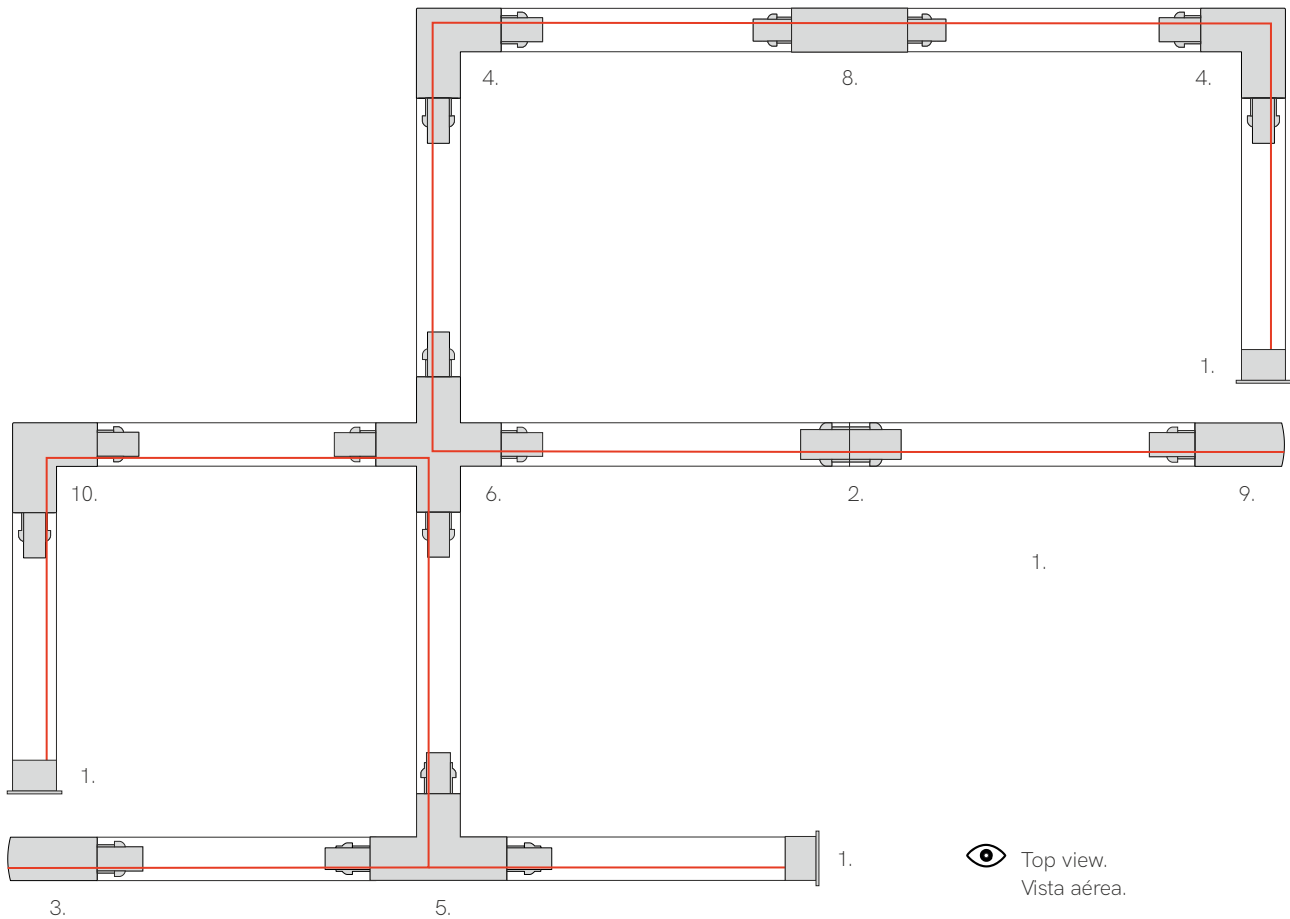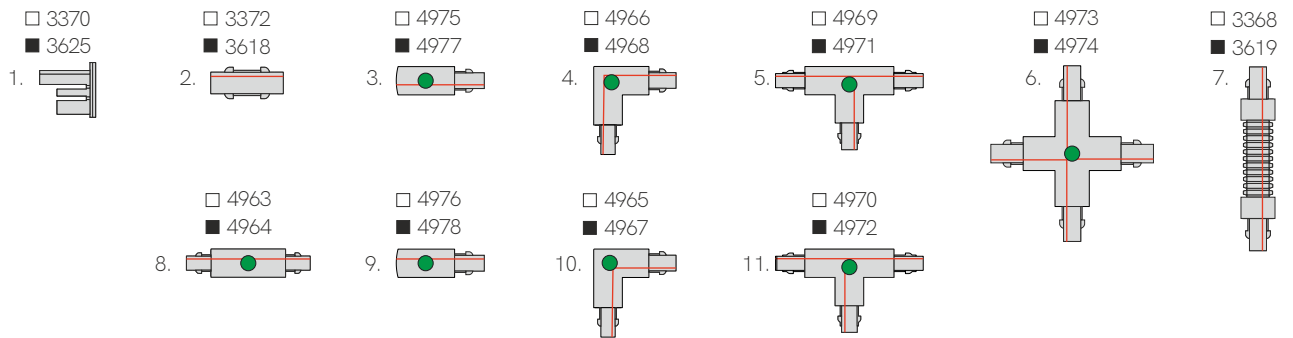

● Allows power input



3 YEARS WARRANTY | IP 20



\*End cap and power supply included

**Three phase track recessed**

W: 56mm H: 33mm

- 2m 3897
- 3m 3898
- 2m 4753
- 3m 4754



**Track ceiling recessed**

L: 64mm W: 25mm H: 32mm

- 3805



**Track power supply recessed**

L: 98mm W: 56,5mm H: 33,7mm

- Left 4975
- Right 4976
- Left 4977
- Right 4978



**Joint track without spacing**

L: 68mm W: 25mm H: 27mm

- 3372
- 3618



**Joint track with spacing recessed**

L: 166mm W: 56,5mm H: 33,7mm

- 4963
- 4964



**Flexible joint track**

L: 245mm W: 35mm H: 32mm


- 3368
- 3619



**L Joint track recessed**

L: 111mm W: 111mm H: 33,7mm

- Left 4965
- Right 4966
- Left 4967
- Right 4968



**T Joint track recessed**

L: 166mm W: 111mm H: 33,7mm

- Left 4969
- Right 4970
- Left 4971
- Right 4972



**X Joint track recessed**

L: 166mm W: 166mm H: 33,7mm

- 4973
- 4974



**End cap**

L: 32mm W: 32mm H: 32mm

- 3370
- 3625



**Three phase adapter**

L: 70mm W: 40mm H: 41mm

- 3371-V2
- 3624-V2



**Three phase recessed base**

L: Ø130mm H: 60mm Ø110mm


- 3851
- 3852

\*Need Three Phase Surface Base (4700 or 4701) to put inside.





Nox

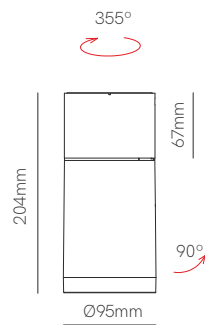

Technical Information

Power	30W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.460 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/> 4241-N
	<input type="checkbox"/> 4242-N
	Custom RAL

Consult delivery terms and conditions.


Accessories



Included with:  
4241-N




Included with:  
4241-N / 4242-N



3 YEARS WARRANTY | 
 30.000 HOURS | 
 15° / 24° / 40° | 
 IP 20 | 
 220/240 VAC | 
 UGR <19 | 
 PF >0,9 | 
 CRI ≥94 | 
 | 
 50/60 Hz | 
 +50°C / -20°C | 
 CCT SWITCH | 
 1/8




Bonn

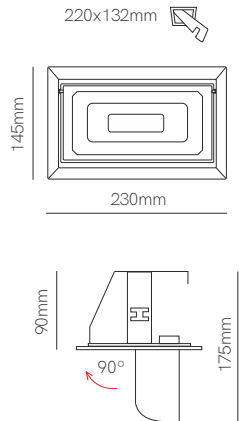

Technical Information

Power	40W
Installation	Recessed
Color Temperature	3.000K / 4.100K
Lumens	4.750 lm / 4.800 lm
Material	Aluminium
Finishes	White / Gray

Code	<input type="checkbox"/> 3.000K 4097
	<input type="checkbox"/> 4.100K 4096
	<input type="checkbox"/> 3.000K 4099
	<input type="checkbox"/> 4.100K 4098
	Custom RAL




Consult delivery terms and conditions.

5 YEARS WARRANTY | 
 30.000 HOURS | 
 IP 20 | 
 220/240 VAC | 
 PF >0,9 | 
 CRI ≥80 | 
 100° | 
 50/60 Hz | 
 | 
 +40°C / -20°C | 
 1/12






Tram recessed 2

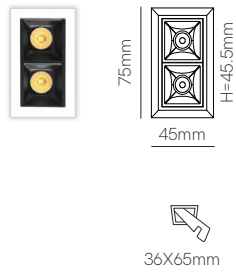

Tram recessed 5

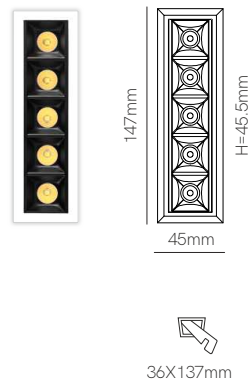

\*Need Tuya Smart App to work.



Technical Information

Power	6W	10W
Installation	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Tuya 2.700K - 6.000K
Lumens	220 lm	500 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4731 <input checked="" type="checkbox"/> 4732	<input type="checkbox"/> 4733 <input checked="" type="checkbox"/> 4734

Accessories



Gateway Wifi 4956





\*See page 8 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | | +40°C / -10°C |

Tram recessed 10

Tram recessed 15

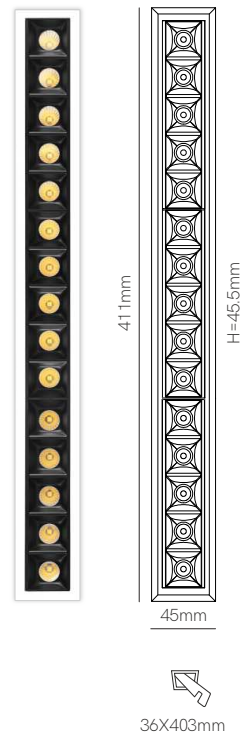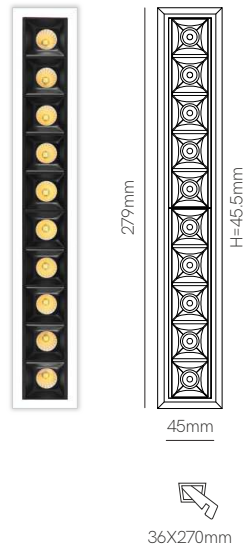


\*Need Tuya Smart App to work.

Technical Information

Power	20W	30W
Installation	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Tuya 2.700K -6.000K
Lumens	1.000 lm	1.500 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4735 <input checked="" type="checkbox"/> 4736	<input type="checkbox"/> 4737 <input checked="" type="checkbox"/> 4738




Accessories




\*See page 8 for Gateway additional info.



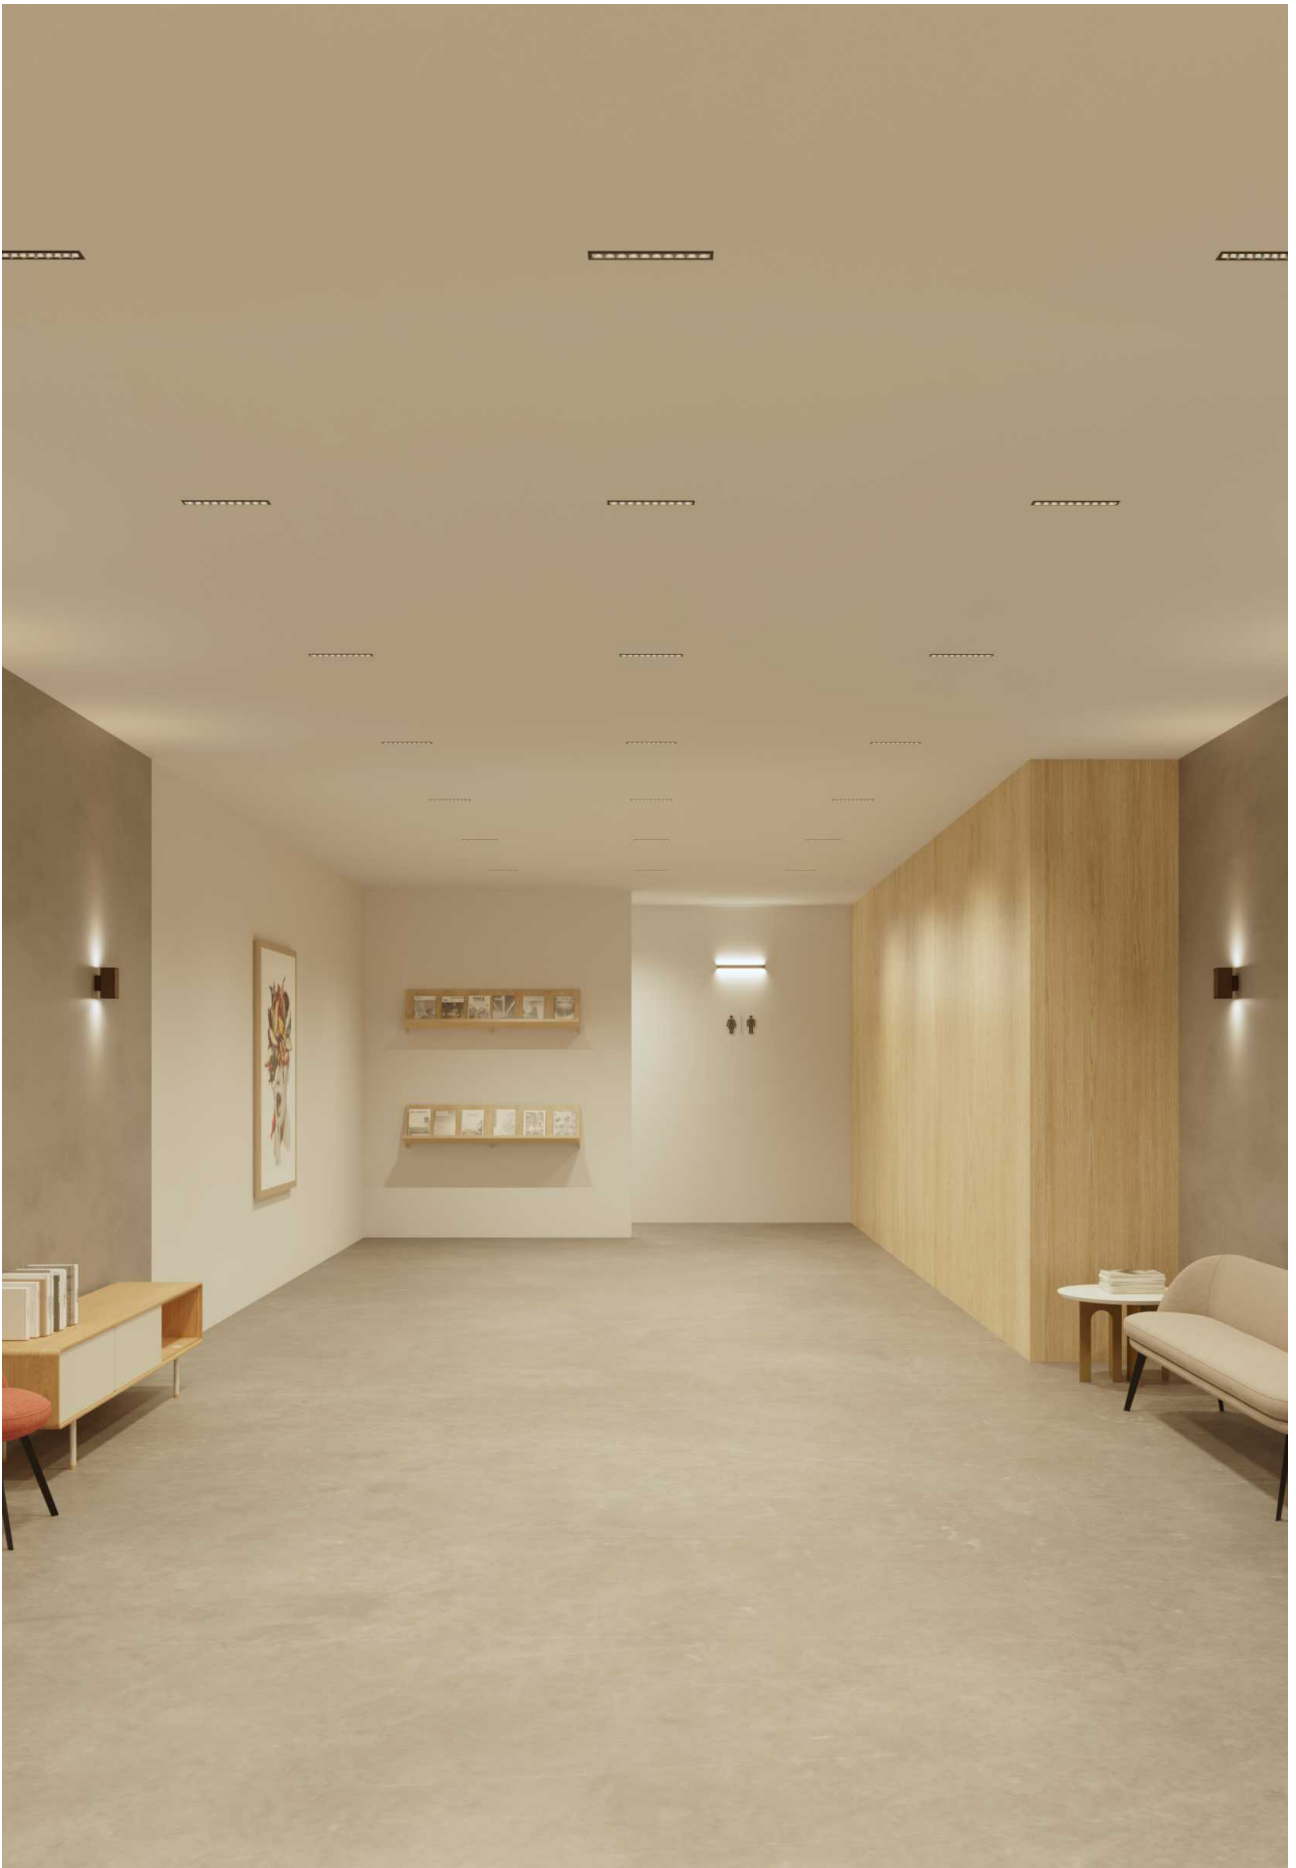



Tao

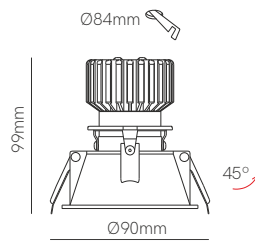

Technical Information


Power	10W
Installation	Recessed
Color Temperature	3.000K / 4.000K
Lumens	925 lm / 1.000 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	3.000K	3942
	<input type="checkbox"/>	4.000K	3943
	<input checked="" type="checkbox"/>	3.000K	3944
	<input checked="" type="checkbox"/>	4.000K	3945
		Custom RAL	





Consult delivery terms and conditions.

3 YEARS WARRANTY | 
 50.000 HOURS | 
 IP 32 | 
 220/240 VAC | 
 UGR <19 | 
 PF >0,9 | 
 CRI ≥80 | 
 | 
 38° | 
 50/60 Hz | 
 | 
 +40°C | 
 -20°C | 
 1/40

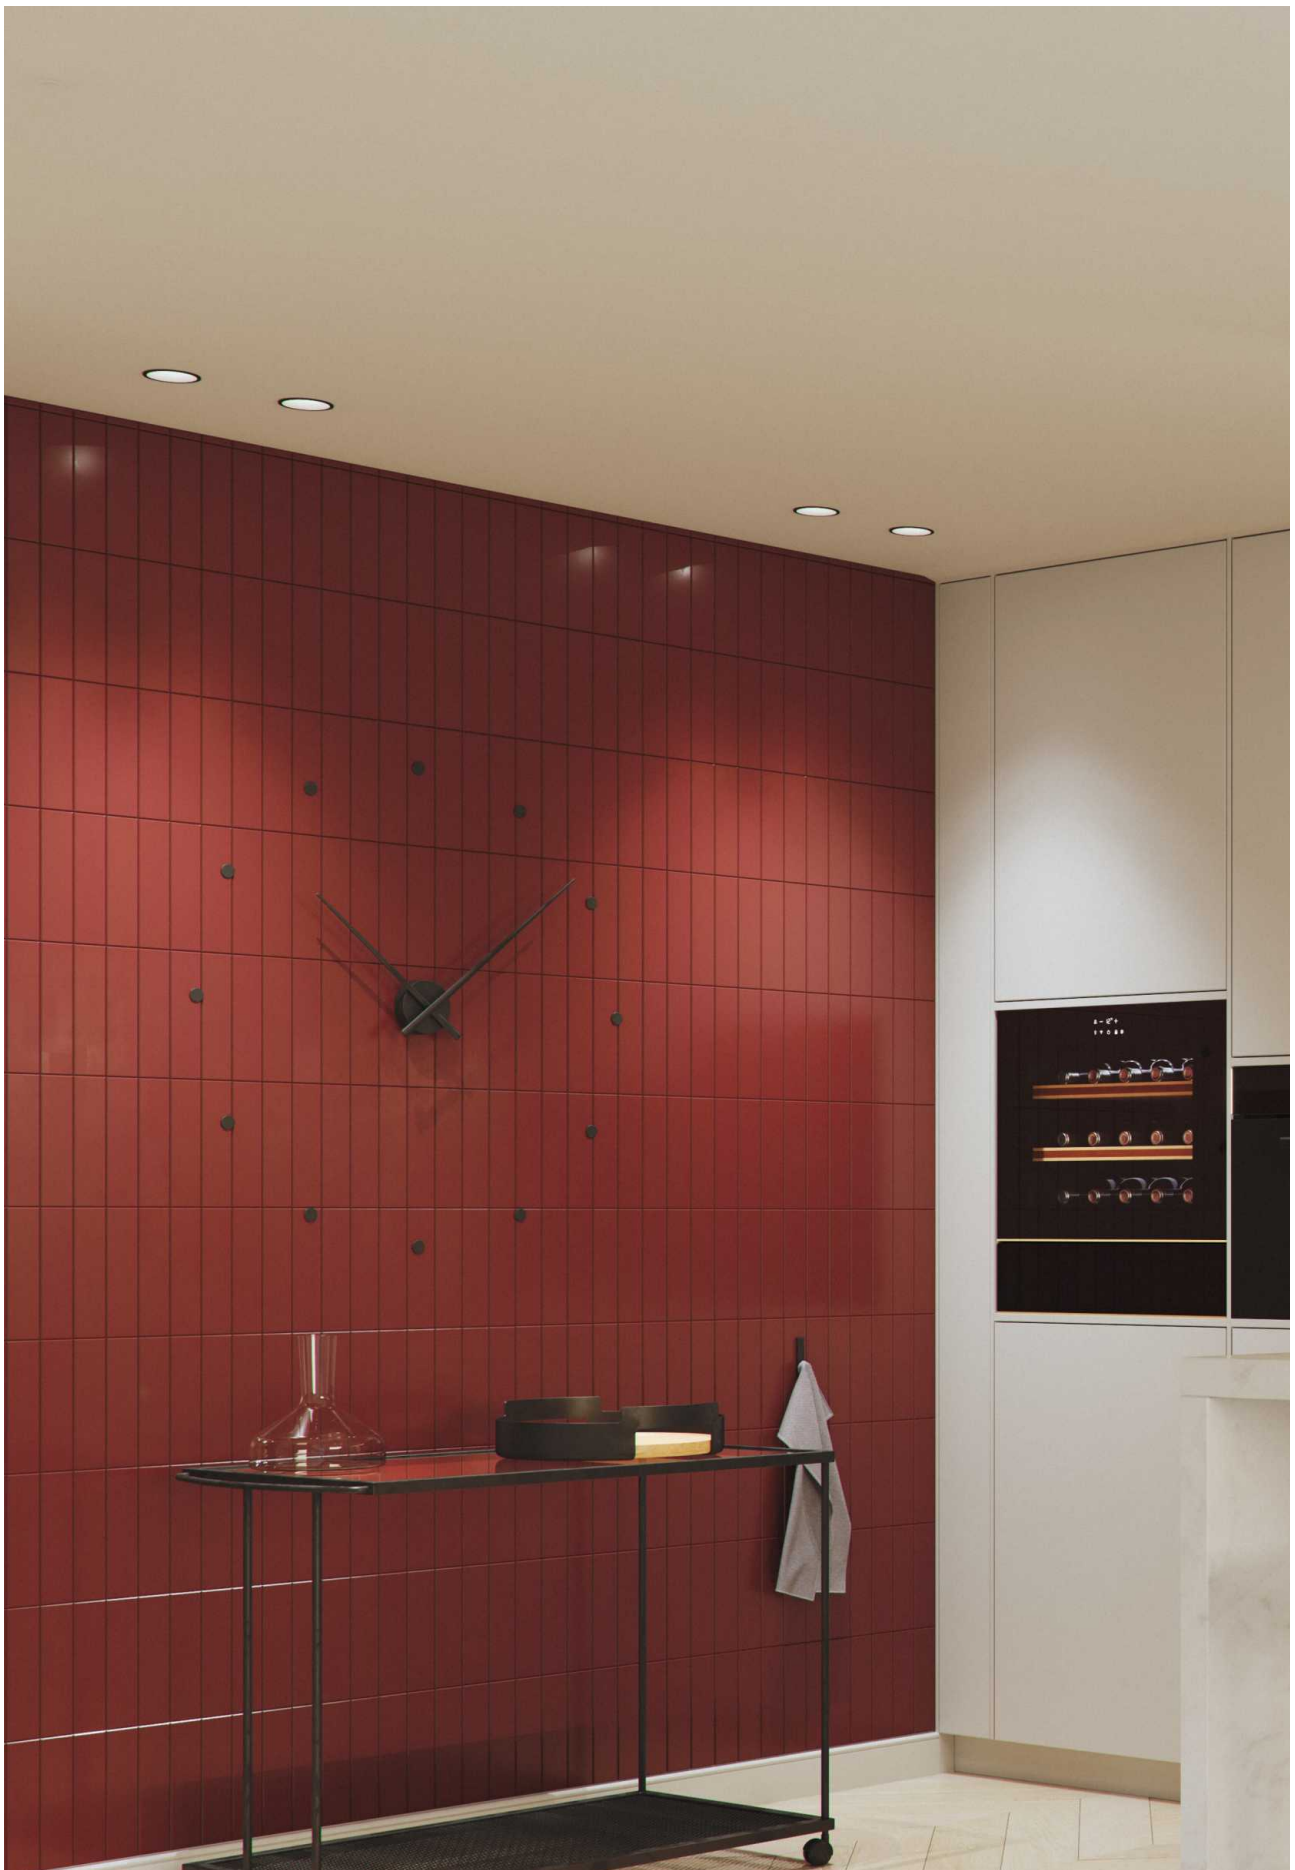


Pulcom round

Pulcom square



Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	800 lm	800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4742 <input checked="" type="checkbox"/> 4746 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4744 <input checked="" type="checkbox"/> 4748 <input checked="" type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 
 | 38° | 50/60 Hz | | | 
 +40°C | CCT SWITCH | 1/5/20


Pulcom round asymmetric

Pulcom square asymmetric

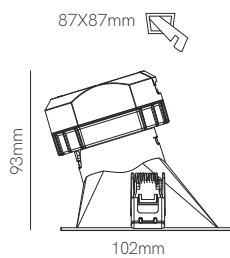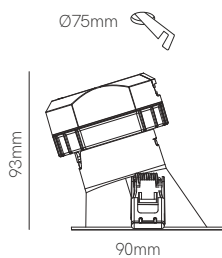

Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	800 lm	800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4743 <input checked="" type="checkbox"/> 4747 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4745 <input checked="" type="checkbox"/> 4749 <input checked="" type="checkbox"/> Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C / -20°C | CCT SWITCH | 1/5/20





Pulcom led




Pulcom trim




Round trim

Ø75mm



Square trim

87X87mm




Pulcom asymmetric trim




Asymmetric round trim

Ø75mm



Asymmetric square trim

87X87mm



Technical Information

Power	8W	-	-
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	-	-
Lumens	800 lm	-	-
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black / Wood	White / Black

Code	<input type="checkbox"/> 4763	<input type="checkbox"/> round 4761	<input type="checkbox"/> round asymmetric 4821
	<input checked="" type="checkbox"/> 4764	<input checked="" type="checkbox"/> round 4762	<input checked="" type="checkbox"/> round asymmetric 4822
		<input checked="" type="checkbox"/> round 4935	<input type="checkbox"/> square asymmetric 4825
		<input type="checkbox"/> square 4823	<input checked="" type="checkbox"/> square asymmetric 4826
		<input checked="" type="checkbox"/> square 4824	<input checked="" type="checkbox"/> Custom RAL
		<input checked="" type="checkbox"/> Custom RAL	<input checked="" type="checkbox"/> Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C / -20°C | 1/5/20



---

 Pulcom surface accessory


\*Need Pulcom led (page 348).

---

 Technical Information

Installation	Surface
Material	Polycarbonate
Finishes	White / Black / Wood
Code	<input type="checkbox"/> 5034 <input type="checkbox"/> 5035 <input type="checkbox"/> 5036 <input checked="" type="checkbox"/> Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50





Pulcom surface accessory







Private Residence, Granollers (Spain). Construction: ABL Group. Design: Mon Arquitectura.




Pulsar switch

Pulsar

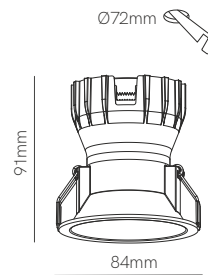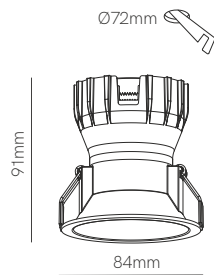

Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	5.000K
Lumens	780 lm / 800 lm / 840 lm	860 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5057 <input checked="" type="checkbox"/> 5058 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5.000K 4217 <input checked="" type="checkbox"/> 5.000K 4218 <input checked="" type="checkbox"/> Custom RAL



ⓘ Consult delivery terms and conditions.




3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,9 | CRI ≥85 | | 40° | 50/60 Hz | TRIAC DIMM | RT 2012 REGLEMENTATION THERMIQUE | +45°C / -20°C | 1/10/30

New

Pulsar surface accessory

Pulsar asymmetric trim

Pulsar matt gold trim

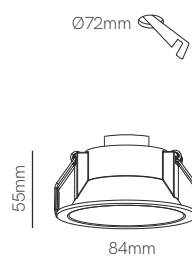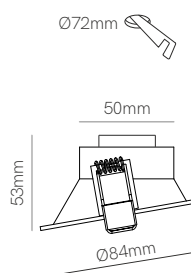

\*Need Pulsar (page 355).


Technical Information

Installation	Surface	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black / White-matt gold / Black-matt gold	White-matt gold/Black-matt gold
Code	<input type="checkbox"/> 5110 <input checked="" type="checkbox"/> 5111 <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 5059 <input checked="" type="checkbox"/> 5060 <input checked="" type="checkbox"/> 5212 <b>New</b> <input checked="" type="checkbox"/> 5213 <b>New</b> <input checked="" type="checkbox"/> Custom RAL	<input checked="" type="checkbox"/> 5206 <input checked="" type="checkbox"/> 5207

1/20

1/50

1/50





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY



Nano pulsar round


Nano pulsar square



Technical Information

Power	3,5W	3,5W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	170 lm / 180 lm / 200 lm	170 lm / 180 lm / 200 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 4297	<input type="checkbox"/> 2.700K 4451
	<input type="checkbox"/> 3.000K 4298	<input type="checkbox"/> 3.000K 4452
	<input type="checkbox"/> 4.000K 4299	<input type="checkbox"/> 4.000K 4453
	<input checked="" type="checkbox"/> 2.700K 4300	<input checked="" type="checkbox"/> 2.700K 4454
	<input checked="" type="checkbox"/> 3.000K 4301	<input checked="" type="checkbox"/> 3.000K 4455
	<input checked="" type="checkbox"/> 4.000K 4302	<input checked="" type="checkbox"/> 4.000K 4456
	<input checked="" type="checkbox"/> Custom RAL	<input checked="" type="checkbox"/> Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 
 30.000 HOURS | 
 IP 65 | 
 220/240 VAC | 
 UGR <16 | 
 PF >0,5 | 
 CRI ≥80 | 
 30° | 
 50/60 Hz | 
 +40°C / -20°C | 
 1/50





New

Nano pulsar round  
matt gold trim




Nano pulsar square  
matt gold trim



\*Need Nano Pulsar (page 358).

Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White-matt gold/Black-matt gold	White-matt gold/Black-matt gold
Code	<span style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border: 1px solid black; margin-right: 5px;"></span> 5208 <span style="display: inline-block; width: 10px; height: 10px; background-color: #808080; border: 1px solid black; margin-right: 5px;"></span> 5209	<span style="display: inline-block; width: 10px; height: 10px; background-color: #c0c0c0; border: 1px solid black; margin-right: 5px;"></span> 5210 <span style="display: inline-block; width: 10px; height: 10px; background-color: #808080; border: 1px solid black; margin-right: 5px;"></span> 5211



3 YEARS WARRANTY | 1/4/300




Nano pulsar round surface accessory

Nano pulsar square surface accessory



\*Not included

\*Not included



\*Need Nano Pulsar (page 358).

Technical Information

Installation
Material
Finishes

Surface
Material
Finishes

Surface
Material
Finishes

Code
------

<input type="checkbox"/> 4410
<input checked="" type="checkbox"/> 4411
Custom RAL

<input type="checkbox"/> 4412
<input checked="" type="checkbox"/> 4413
Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50










New

Oxo round dimmable




Oxo square dimmable

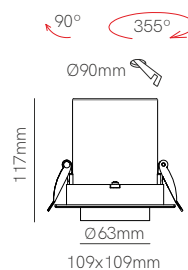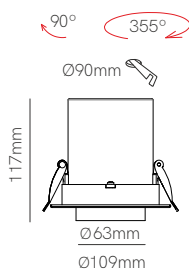

Technical Information

Power	12W	12W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.260 lm	1.260 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4457-D <input checked="" type="checkbox"/> 4458-D <input checked="" type="checkbox"/> Custom RAL	<input type="checkbox"/> 4459-D <input checked="" type="checkbox"/> 4460-D <input checked="" type="checkbox"/> Custom RAL

Accessories







ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥80 | | 15° / 38° / 60° | 50/60 Hz | TRIAC DIMM | | +50°C / -20°C | CCT SWITCH | 1/20





Mini oxo round 1

Mini oxo square 1



Technical Information

Power	6W	6W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	600 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 5061 <input checked="" type="checkbox"/> 5062	<input type="checkbox"/> 5108 <input checked="" type="checkbox"/> 5109







Mini oxo square 2





130X80mm



Mini oxo square 4





227X80mm



Mini oxo square 6



325X80mm

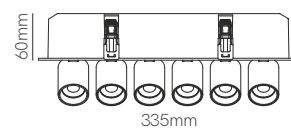


Technical Information

Power	12W	24W	36W
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.200 lm	2.400 lm	3.600 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black
Code	<input type="checkbox"/> 5063 <input checked="" type="checkbox"/> 5064	<input type="checkbox"/> 5065 <input checked="" type="checkbox"/> 5066	<input type="checkbox"/> 5067 <input checked="" type="checkbox"/> 5068

1/10

1/10

1/5



3 YEARS WARRANTY | 25.000 HOURS | → | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | | 42° | 50/60 Hz | | +40°C / -20°C | CCT SWITCH










Nano oxo round

Nano oxo square



Technical Information


Power	4W	4W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	380 lm	380 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="checkbox"/> 4549 <input checked="" type="checkbox"/> 4551 <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 4550 <input checked="" type="checkbox"/> 4552 <input type="checkbox"/> Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 45° | 50/60 Hz | | +50°C / -20°C | CCT SWITCH | 1/10/50





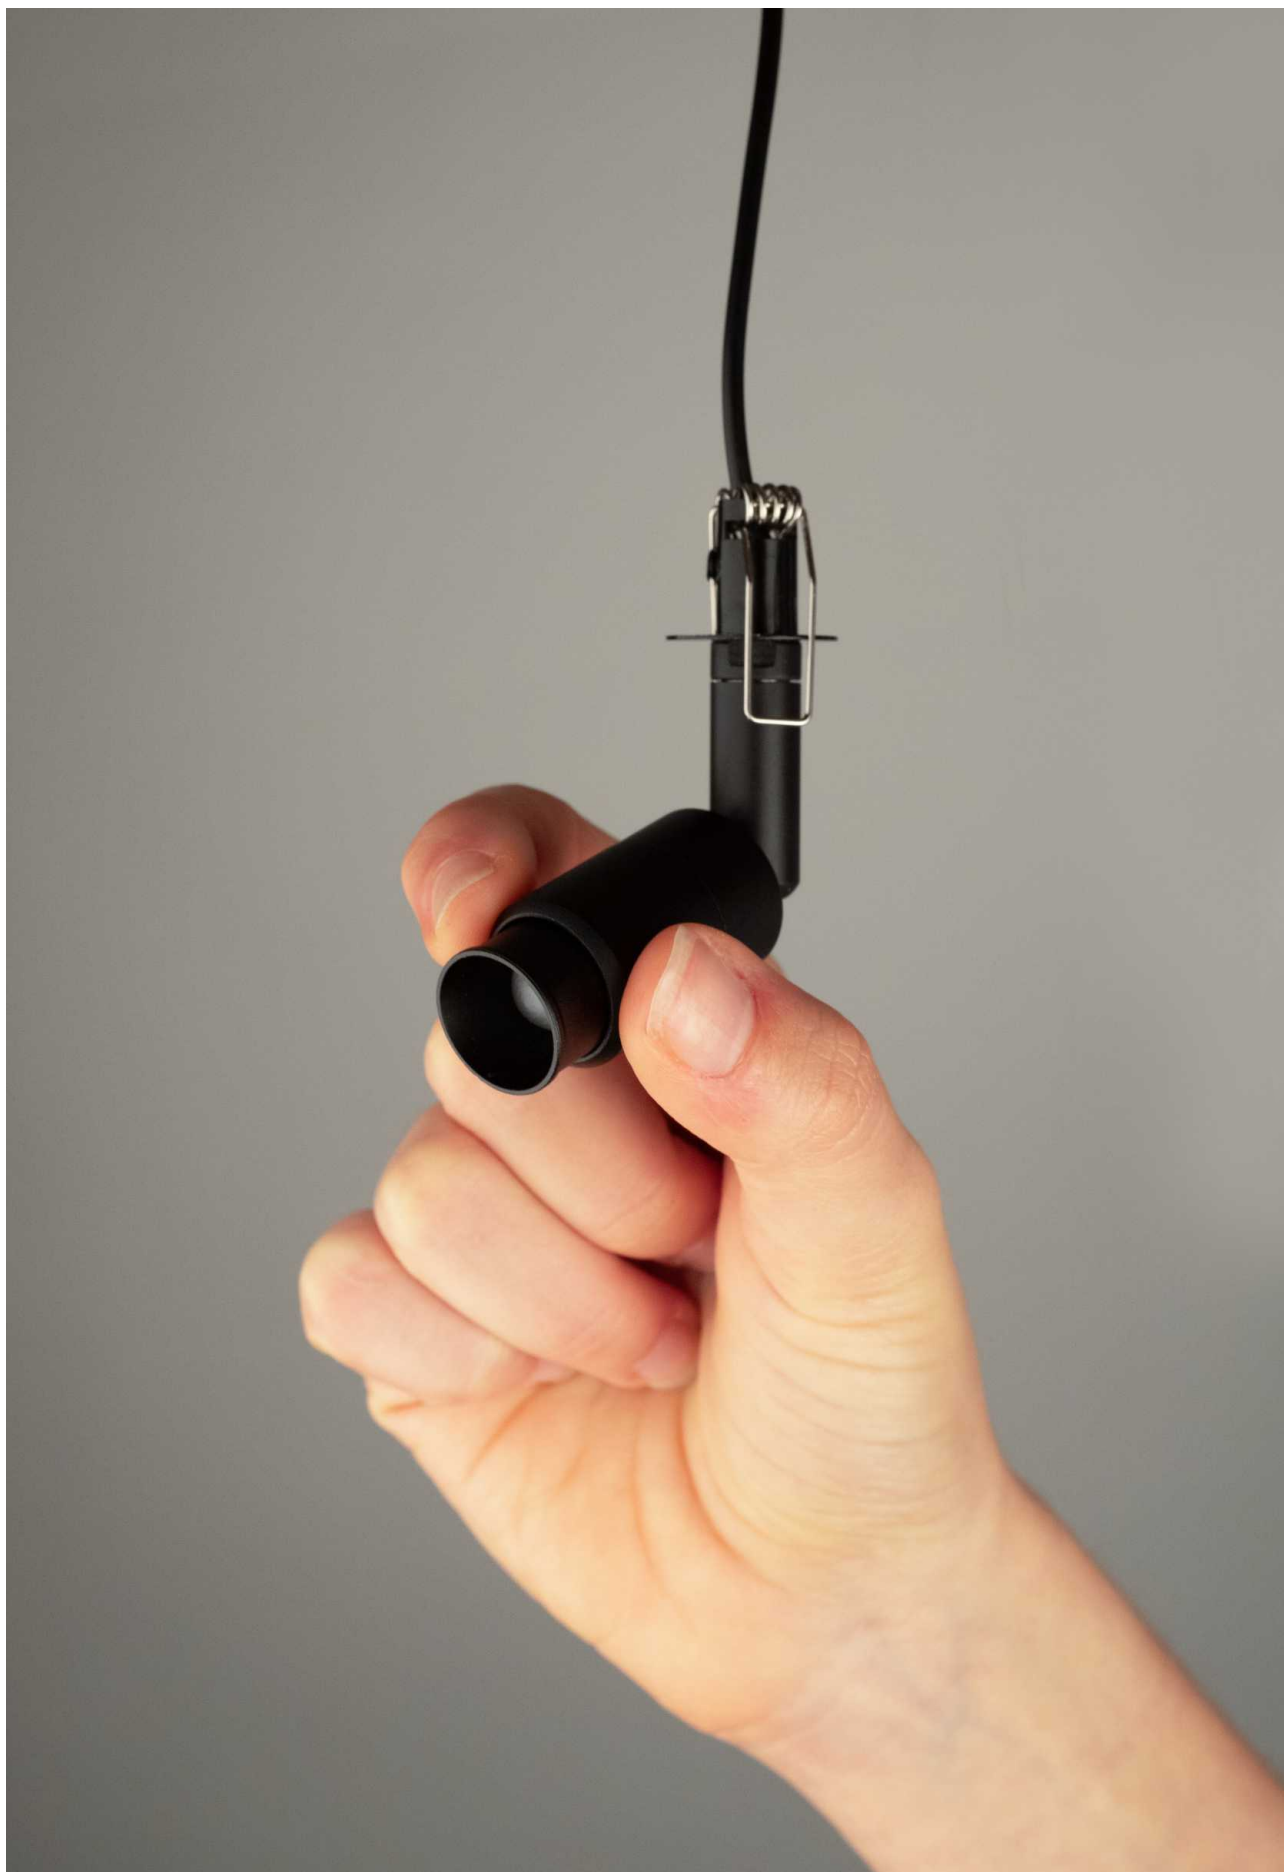

New

Micro zoom

Micro zoom large

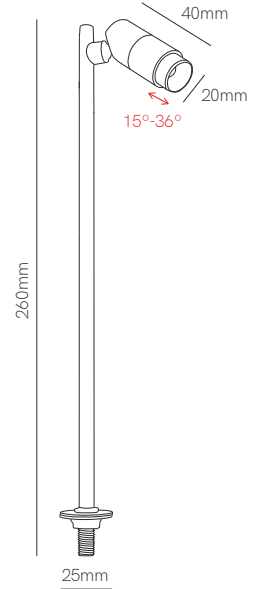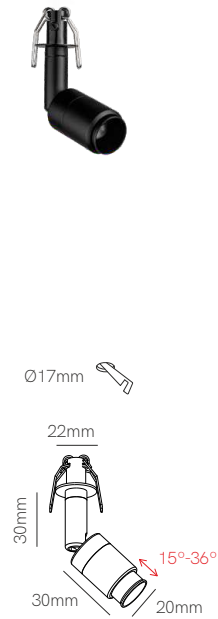


Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	70 lm	70 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5273	<input type="checkbox"/> 2.700K 5279
	<input type="checkbox"/> 3.000K 5274	<input type="checkbox"/> 3.000K 5280
	<input type="checkbox"/> 4.000K 5275	<input type="checkbox"/> 4.000K 5281
	<input checked="" type="checkbox"/> 2.700K 5276	<input checked="" type="checkbox"/> 2.700K 5282
	<input checked="" type="checkbox"/> 3.000K 5277	<input checked="" type="checkbox"/> 3.000K 5283
	<input checked="" type="checkbox"/> 4.000K 5278	<input checked="" type="checkbox"/> 4.000K 5284

1/100


1/50




3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C / -20°C

New

Golf 200mm

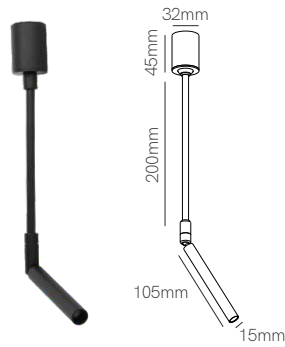

Golf 400mm

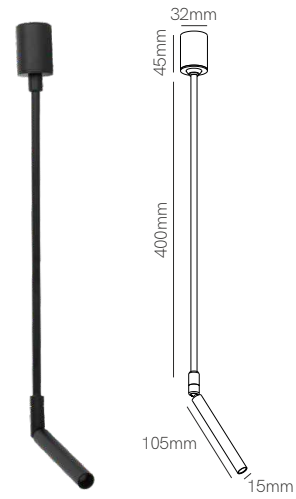

Technical Information

Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5285	<input type="checkbox"/> 2.700K 5291
	<input type="checkbox"/> 3.000K 5286	<input type="checkbox"/> 3.000K 5292
	<input type="checkbox"/> 4.000K 5287	<input type="checkbox"/> 4.000K 5293
	<input checked="" type="checkbox"/> 2.700K 5288	<input checked="" type="checkbox"/> 2.700K 5294
	<input checked="" type="checkbox"/> 3.000K 5289	<input checked="" type="checkbox"/> 3.000K 5295
	<input checked="" type="checkbox"/> 4.000K 5290	<input checked="" type="checkbox"/> 4.000K 5296



3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | | 24° | 50/60 Hz | +40°C / -20°C | 1/50

New

Golf 600mm


Golf 800mm



Technical Information

Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	<input type="checkbox"/> 2.700K 5297	<input type="checkbox"/> 2.700K 5303
	<input type="checkbox"/> 3.000K 5298	<input type="checkbox"/> 3.000K 5304
	<input type="checkbox"/> 4.000K 5299	<input type="checkbox"/> 4.000K 5305
	<input checked="" type="checkbox"/> 2.700K 5300	<input checked="" type="checkbox"/> 2.700K 5306
	<input checked="" type="checkbox"/> 3.000K 5301	<input checked="" type="checkbox"/> 3.000K 5307
	<input checked="" type="checkbox"/> 4.000K 5302	<input checked="" type="checkbox"/> 4.000K 5308




3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C / -20°C | 1/50





New

Atom



Technical Information

Power	2W
Installation	Recessed
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	90 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="checkbox"/>	2.700K	5267
	<input type="checkbox"/>	3.000K	5268
	<input type="checkbox"/>	4.000K	5269
	<input checked="" type="checkbox"/>	2.700K	5270
	<input checked="" type="checkbox"/>	3.000K	5271
	<input checked="" type="checkbox"/>	4.000K	5272



3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C / -20°C | 1/100