




## Constant Voltage Driver

**Model: 5559/6025**

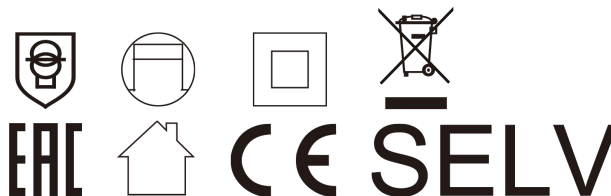

Model	Rated Input Voltage	Input Current	PF	Output Power Range	Output Voltage	Output Current	Efficiency (typ.)
5559 (W)*	220-240VAC	≤1.5A	≥0.95	0-250W	48V	0-5.21A	92%
6025 (B)*	220-240VAC	≤1.5A	≥0.95	0-250W	48V	0-5.21A	92%

**\*2 extra leads for DALI through wiring**

**\* Test result @230V, 50Hz, Full Load.**

### 1.Parameters

Category	Item	Technical Norm
Features	Output Type	Constant Voltage
	Output Features	Isolation
	Insulation Class	Class II
	IP Grade	IP20
Input	Rated Input Voltage	220-240VAC
	Range of Input Voltage	176-264VAC
	Frequency	50/60Hz
	Input Current	≤1.5A, 198VAC, Rated Load
	Input Power	≤272W (230VAC, full load)
	Power Factor	≥0.95 (230VAC, full load)
	THD	≤10% (230VAC, full load)
	Standby Power Consumption	≤0.5W @230VAC
	Inrush Current	≤80A/200us (230VAC, full-load)
	Connected quantity of 16A Breaker :	12pcs, 16A type B / 19pcs 16A type C
Output	Output Voltage	48VDC ±3%
	No Load Voltage	48VDC ±3%
	Output Current	0 -5.21A
	Rated Output Power	250W
	Efficiency	≥90% (230VAC, full load)
	Started Delay Time	≤0.5S (220-240VAC)
	Output Ripple Voltage	<1% (220-240VAC, full load)
Protection	Short Circuit Protection	Auto Recovery
	Over Current Protection	120%~200%Io, Auto Recover
	No-load Protection	<50V, Auto Recovery
	Insulation voltage	I/P to O/P, 3KVac/5mA/1min

Environment	Insulation resistance	>100M ohm @ 500VDC
	Leakage current	I/P to O/P < 250 μ A
	Ta/Operation Temperature	-25...+40°C
	Ts/Storage Temperature	-40....+85°C
	Tc/Enclosure Temperature	<85°C
	Humidity	5%....85%RH
Construction	Atmosphere	86-108KPa
	Connection Method	Direct Lead
	Installation	Built-in
	PRI Wire preparation	0.75mm <sup>2</sup> *2, blue/brown+0.3mm <sup>2</sup> *2, Black/Yellow
	SEC Wire preparation	NA
Standards	Dimension	268X22X43.5mm (L*W*H)
	Certification	TUV
	Safety Standards	EN61347-1:2015,EN61347-2-13:2014/A1:2017,EN 62493:2015, GB19510.1, GB19510.14
	EMC Standards	EN55015:2013/A1:2015,EN61000-3-2:2014,EN61000-3-3:2013,EN61547:2009, GB 17743, GB 17625.1
	Performance	EN62384
Others	Surge	L-N/2KV
	Color	White/Black
	RoHS	Conform to RoHS
	Life Time	50000h @40°C (Ta)
	Warranty	5years F.R. <10000ppm

### Remark

1. All Parameters, if not specified, are measured at 230VAC/50Hz and 25°C ambient temperature.
2. LED Driver is a component of the luminaires, Luminaires and wire layout will affect the EMC, please check the EMC with end products again.
3. Safety warnings for products and installation  
KGP recommends the usage of an opto-insulated repeater dali compatible different modes:
  - 2 different power supplier (2 circuits, 0-60V dc)
  - 1 circuit for 60V dc and 1 circuit for Data B

## 2.Dimension (Unit: mm)

