



▶ VIDEO





# Industrial





Ufo Lens switch  
60W / 80W / 100W


Ufo Lens switch  
90W / 120W / 150W



Technical Information

Power	Switch 60W / 80W / 100W	Switch 90W / 120W / 150W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	131-167 lm/W	128-167 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5147	● 5148

Accessories





Lira 100W/150W/200W  
■ 4566



5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | | CABLE 2M | 60° 90° 110° | 50/60 Hz | IK10 | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

Ufo Lens switch  
120W / 160W / 200W


Ufo Lens switch  
140W / 190W / 240W




Technical Information

Power	Switch 120W / 160W / 200W	Switch 140W / 190W / 240W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	123-169 lm/W	125-156 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	● 5149	● 5150


Accessories



Lira 100W/150W/200W  
■ 4566





Lira 240W  
■ 4567



5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | | CABLE 2M | 60° 90° 110° | 50/60 Hz | | +45°C -25°C | CCT SWITCH | POWER SWITCH | >6KV | 1

Ufo Lens Dali 100W


Ufo Lens Dali 150W



Technical Information

Power	100W	150W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K / 5.000K
Lumens	16.000 lm / 16.200 lm	24.000 lm / 24.200 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	<ul style="list-style-type: none"> <li>● 4.000K 4915</li> <li>● 5.000K 4916</li> </ul>	<ul style="list-style-type: none"> <li>● 4.000K 4917</li> <li>● 5.000K 4918</li> </ul>

Accessories





Lira 100W/150W/200W  
■ 4566



5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | | CABLE 2M | 60°/90°/120° | 50/60 Hz | IK10 | +50°C / -30°C | >4KV | | 1

Ufo Lens Dali 200W


Ufo Lens Dali 240W




Technical Information

Power	200W	240W
Installation	Surface	Surface
Color Temperature	4.000K / 5.000K	4.000K
Lumens	32.000 lm / 32.200 lm	38.400 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	<ul style="list-style-type: none"> <li>● 4.000K 4919</li> <li>● 5.000K 4920</li> </ul>	<ul style="list-style-type: none"> <li>● 4.000K 4921</li> </ul>

Accessories



Lira 100W/150W/200W  
■ 4566



Lira 240W  
■ 4567




5 YEARS WARRANTY | 50.000 HOURS | | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | | CABLE 2M | 60°/90°/120° | 50/60 Hz | IK10 | +50°C / -30°C | >4KV | | 1





	60°			90°			120°		
Ufo lens 100W	1m	5m	11m	1m	5m	10m	1m	5m	10m
	9.113 lx	365 lx	75 lx	7.867 lx	315 lx	79 lx	6.638 lx	266 lx	66 lx
Ufo lens 150W	1m	7m	14m	1m	6m	13m	1m	6m	12m
	13.670 lx	279 lx	70 lx	11.800 lx	328 lx	70 lx	9.956 lx	277 lx	69 lx
Ufo lens 200W	1m	8m	16m	1m	7m	15m	1m	7m	14m
	18.226 lx	225 lx	71 lx	15.733 lx	321 lx	70 lx	13.275 lx	271 lx	68 lx
Ufo lens 240W	1m	9m	19m	1m	9m	19m	1m	9m	19m
	26.635 lx	329 lx	74 lx	26.654 lx	292 lx	73 lx	15.882 lx	324 lx	68 lx




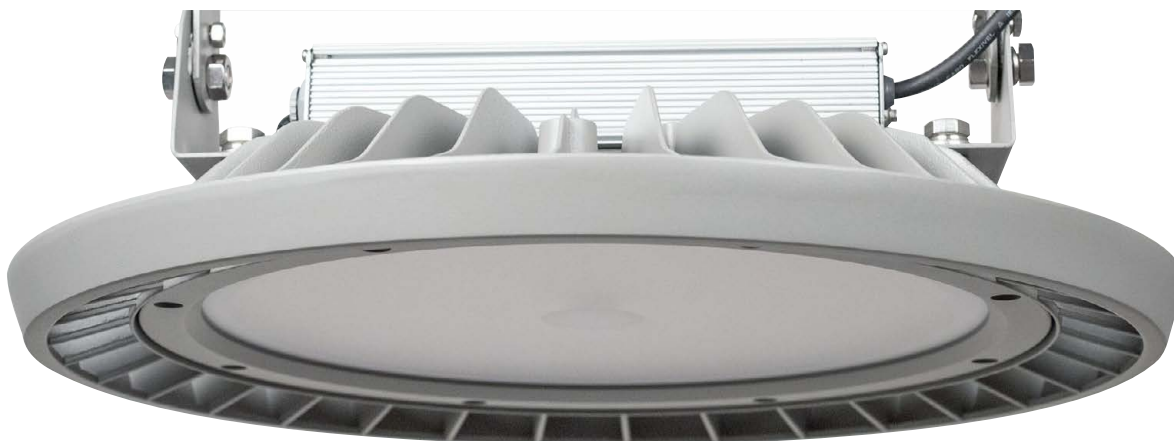



Position the DIP switches to set the power.

1	2	3	4	W	lm
ON	ON	ON	ON	320W	47.040lm
ON	ON	ON	OFF	300W	44.100lm
ON	ON	OFF	ON	290W	42.630lm
ON	ON	OFF	OFF	275W	40.425lm
ON	OFF	ON	ON	260W	38.220lm
ON	OFF	ON	OFF	245W	36.015lm
ON	OFF	OFF	ON	230W	33.810lm
ON	OFF	OFF	OFF	215W	31.605lm
OFF	ON	ON	ON	200W	29.400lm
OFF	ON	ON	OFF	185W	27.195lm
OFF	ON	OFF	ON	170W	24.990lm

DIP  
Switch  
Dual In-line Package

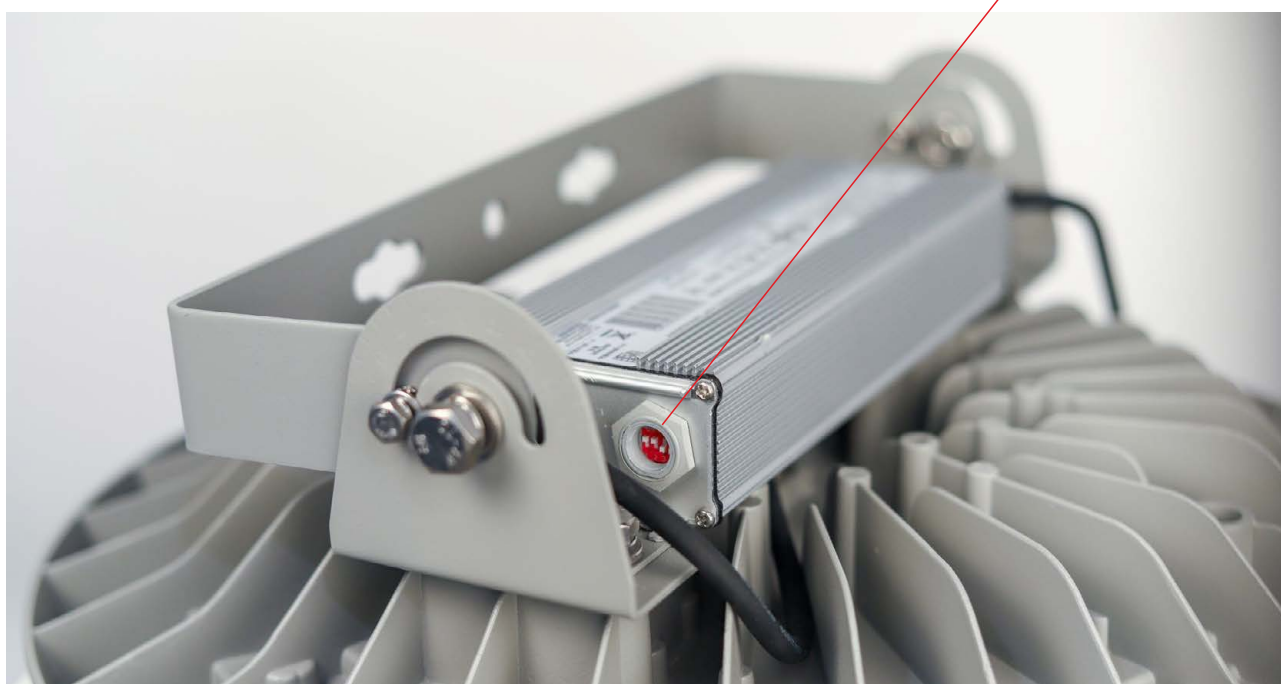

Ufo 300W

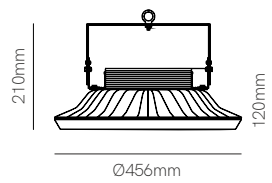

1m	7m	14m
14.401 lx	294 lx	73lx



Technical Information

Power	300W
Installation	Surface
Color Temperature	4.000K
Lumens	39.000 lm
Material	Aluminium
Finishes	Gray
Code	● 4.000K 3972



\*Lira included.

5 YEARS WARRANTY | 50.000 HOURS | → | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | | CABLE 2M | 110° | 50/60 Hz | | +50°C / -30°C | >4KV | 1