
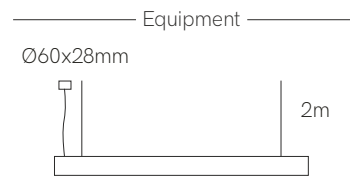
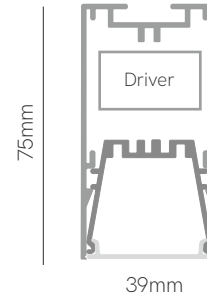


NEW

Color time

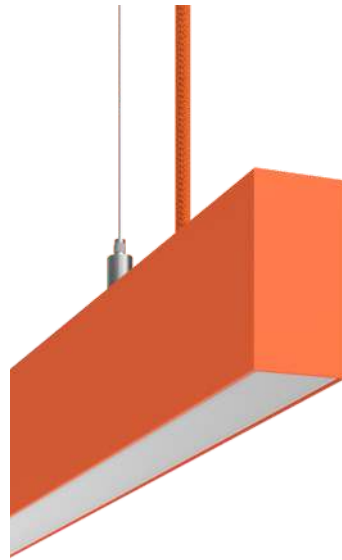

*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories: page 327 pages 326-333




Technical Information

Power	43W / 54W / 64W / 75W
Lumens	4.300 lm - 8.250 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 8	UGR (81°) 0	1.130mm (43W) 3	2.700K (100 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
		1.410mm (54W) 4	3.000K (105 lm/W) 3	Triac 4	<input checked="" type="checkbox"/> Black (9005) 2
		1.690mm (64W) 5	4.000K (110 lm/W) 4	Casambi 5	<input type="checkbox"/> Gray (7037) 3
		1.970mm (75W) 6	2.700-5.500K (100 lm/W) 9	Tuya 7	<input type="checkbox"/> Green (6018) 4
					<input type="checkbox"/> Orange (2009) 5
					<input type="checkbox"/> Red (3020) 6
					<input type="checkbox"/> Violet (4008) 7
					<input type="checkbox"/> Pastel blue (5024) 8
					<input type="checkbox"/> Light blue (5012) 9
					<input checked="" type="checkbox"/> Custom RAL

Code: **8 0**



Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

