


NEW

Dumi

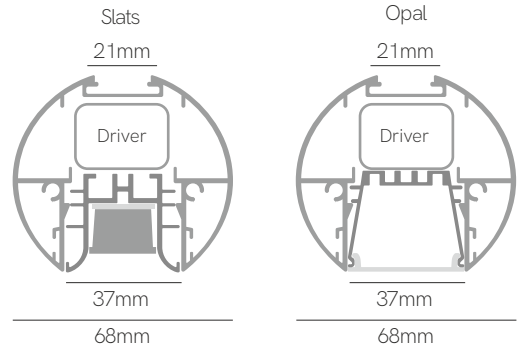

*Finished luminaire. Includes suspension kit and textile power cable.

Control accessories: page 327 pages 326-333




Technical Information

Power	31-38W / 38-47W / 46-56W / 53-74W
Lumens	2.821 lm - 10.064 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	UGR & Opal/Black slats	CCT (lm/W)	Driver	Colour
Code D	UGR (78°)	3	1.170mm (31/38W) 3	2.700K (91-112 lm/W) 2	On / Off 1	<input type="checkbox"/> White (9003) 1
	Opal (112°)	5	1.450mm (38/47W) 4	3.000K (96-128 lm/W) 3	Triac 4	<input type="checkbox"/> Black (9005) 2
	Black slats (60°)	9	1.730mm (46/56W) 5	4.000K (103-136 lm/W) 4	Casambi 5	<input type="checkbox"/> Gray (7037) 3
			2.020mm (53/74W) 6	2.700-5.500K (95-105 lm/W) 9	Tuya 7	<input type="checkbox"/> Green (6018) 4
						<input type="checkbox"/> Orange (2009) 5
						<input type="checkbox"/> Red (3020) 6
						<input type="checkbox"/> Violet (4008) 7
						<input type="checkbox"/> Pastel blue (5024) 8
						<input type="checkbox"/> Light blue (5012) 9
						<input checked="" type="checkbox"/> Custom RAL

Code: **D**



Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

5 YEARS WARRANTY | 50.000 HOURS | IP 40 | UGR <19 (3) / <17 (9) | 230 VAC | PF >0,9 | CRI ≥95 | | | TRIAC DIMM | |