



NEW

Zero Q

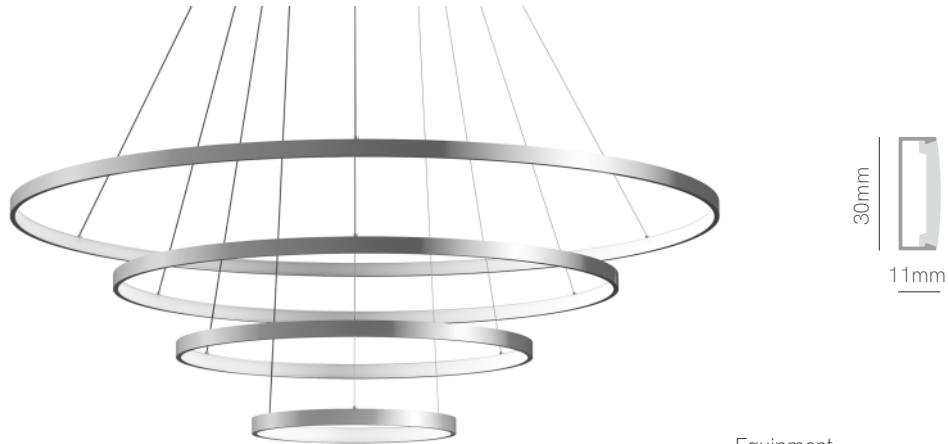


Ø400/700/1.000/1.400mm

Tolerance ±10%




Equipment

Ø500x45mm



*Finished luminaire. Includes power supply, suspension kit and power cable.

Control accessories:  page 327


 pages 326-333

 pages 334-335



Technical Information

Power	246W
Lumens	14.760 lm - 17.712 lm
Installation	Pendant
Material	Aluminium 6063
PCB	Flex (Fine 56)

Code	Diffuser (Angle)	Size	CCT (lm/W)	Driver	Colour
Code Z	Opal (100°) Q	400+700+1.000+1.400mm 6	2.700K (60 lm/W) 2	On / Off 1	○ White (9003) 1
			3.000K (66 lm/W) 3	Dali / Push 2	● Black (9005) 2
			4.000K (72 lm/W) 4	Casambi 4 ⓘ	● Matt Gold 4
			2.700-5.500K (70 lm/W) 9	Tuya 5 ⓘ	● Silver 5
					ⓘ  Custom RAL

Code: **Z** **Q** **6**



ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

