








# Recessed



Nano Argo flat recessed

Argo recessed

Argo XL recessed

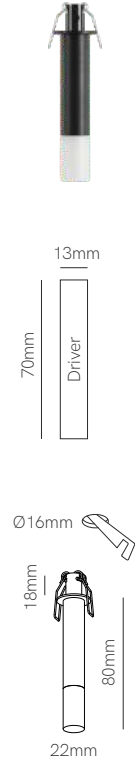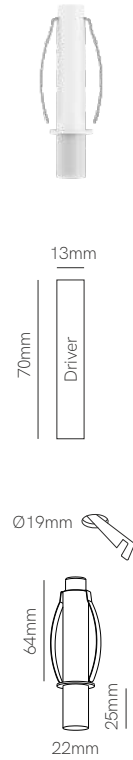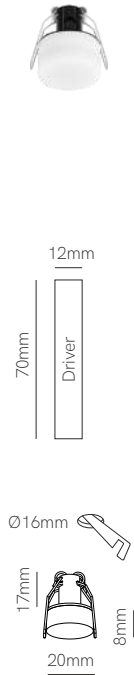


RECESSED

Technical Information


Power	2W	3,5W	3,5W
Driver	3,3 VDC 200 mA	18 VDC 140 mA	18 VDC 140 mA
Installation	Recessed	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	80 lm	125 lm	125 lm
Material	Aluminium and acrylic	Aluminium and acrylic	Aluminium and acrylic
Finishes	White / Black	White / Black	White / Black
Code	<ul style="list-style-type: none"> <li>○ 2.700K 5258</li> <li>○ 3.000K 5259</li> <li>○ 4.000K 5260</li> <li>● 2.700K 5261</li> <li>● 3.000K 5262</li> <li>● 4.000K 5263</li> </ul>	<ul style="list-style-type: none"> <li>○ 2.700K 5246</li> <li>○ 3.000K 5247</li> <li>○ 4.000K 5248</li> <li>● 2.700K 5249</li> <li>● 3.000K 5250</li> <li>● 4.000K 5251</li> </ul>	<ul style="list-style-type: none"> <li>○ 2.700K 5252</li> <li>○ 3.000K 5253</li> <li>○ 4.000K 5254</li> <li>● 2.700K 5255</li> <li>● 3.000K 5256</li> <li>● 4.000K 5257</li> </ul>



3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥90 | 180° | 50/60 Hz | +40°C / -20°C | 1/100

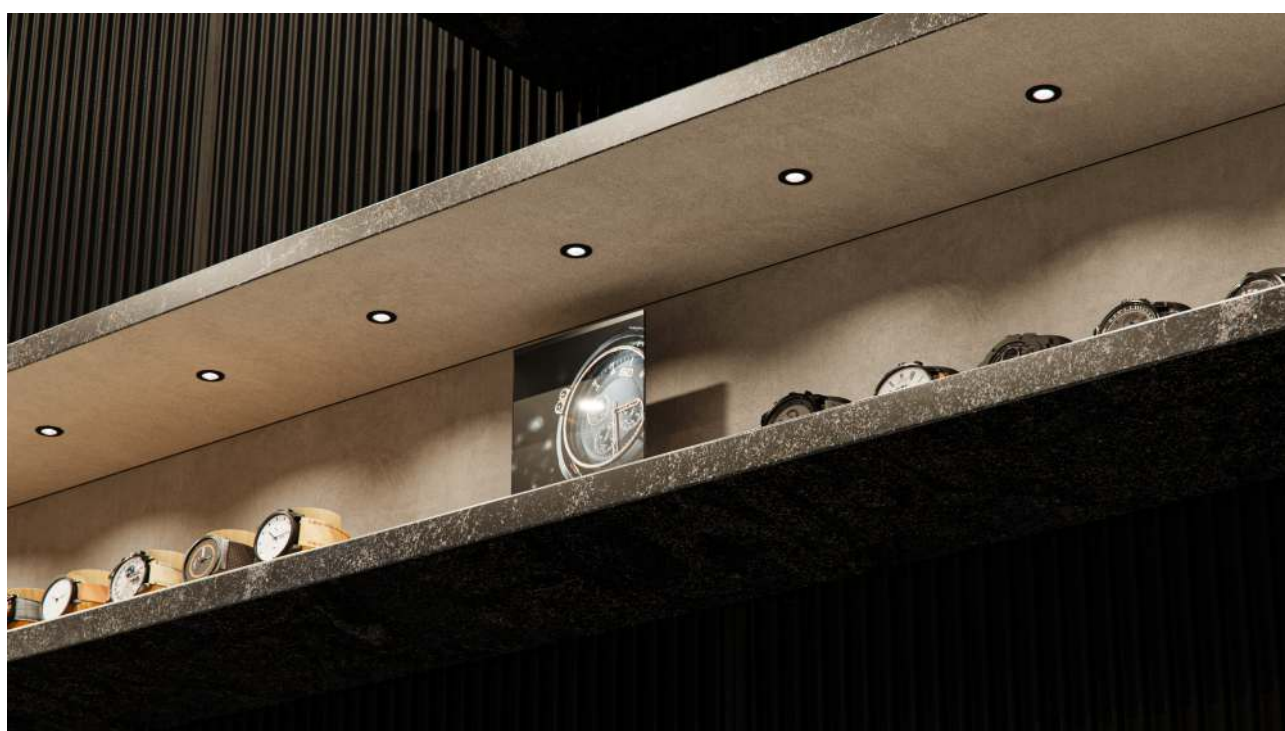


Atom recessed



Technical Information

Power	2W
Driver	3,3 VDC 200 mA
Installation	Recessed
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	90 lm
Material	Aluminium
Finishes	White / Black

Code	○	2.700K	5267
	○	3.000K	5268
	○	4.000K	5269
	●	2.700K	5270
	●	3.000K	5271
	●	4.000K	5272



3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C / -20°C | 1/100





▶ VIDEO



Micro Zoom recessed

Micro Zoom XL recessed

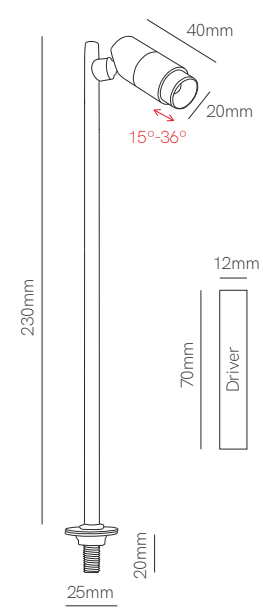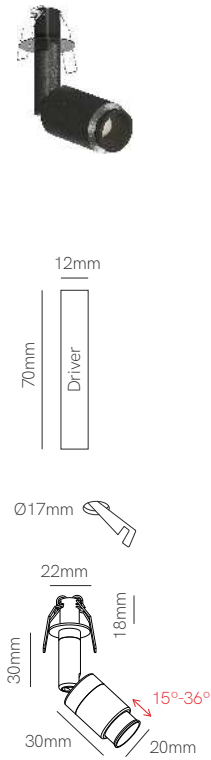

RECESSED

Technical Information

Power	2W	2W
Driver	3 VDC 200 mA	3 VDA 200 mA
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	70 lm	70 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	○ 2.700K 5273	○ 2.700K 5279
	○ 3.000K 5274	○ 3.000K 5280
	○ 4.000K 5275	○ 4.000K 5281
	● 2.700K 5276	● 2.700K 5282
	● 3.000K 5277	● 3.000K 5283
	● 4.000K 5278	● 4.000K 5284




3 YEARS WARRANTY | 35.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 15°-36° | 50/60 Hz | +40°C / -20°C




Ribera Manero, seafood restaurant, Barcelona (Spain).


Nano Pulsar r / sq recessed

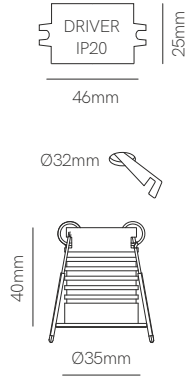

Nano Pulsar r / sq trim



Nano Pulsar r / sq surface



Technical Information

Power	3,5W	-	-
Driver	4,7 VDC 700 mA	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	2.700K / 3.000K / 4.000K	-	-
Lumens	170 lm / 180 lm / 200 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White-matt gold/Black-matt gold	White / Black
Code	<ul style="list-style-type: none"> <li>○ 2.700K 4297</li> <li>○ 3.000K 4298</li> <li>○ 4.000K 4299</li> <li>● 2.700K 4300</li> <li>● 3.000K 4301</li> <li>● 4.000K 4302</li> <li>□ 2.700K 4451</li> <li>□ 3.000K 4452</li> <li>□ 4.000K 4453</li> <li>■ 2.700K 4454</li> <li>■ 3.000K 4455</li> <li>■ 4.000K 4456</li> <li>①  Custom RAL</li> </ul>	<ul style="list-style-type: none"> <li>● 5208</li> <li>● 5209</li> <li>■ 5210</li> <li>■ 5211</li> </ul>	<ul style="list-style-type: none"> <li>○ 4410</li> <li>● 4411</li> <li>□ 4412</li> <li>■ 4413</li> <li>①  Custom RAL</li> </ul>

1/50

1/4/300

1/50




① Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | | +40°C / -20°C





Masia, Solsonès, Lleida (Spain). Design: BECÒinteriors Photography: @marsimal

Pulsar dimm recessed

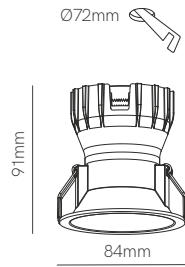


Pulsar trim



Asymmetric

Pulsar surface accessory



RECESSED

Technical Information

Power	8W	-	-
Driver	DOB	-	-
Installation	Recessed	Recessed	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	-	-
Lumens	780 lm / 800 lm / 840 lm	-	-
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black / White-matt gold / Black-matt gold	White / Black

Code	○ 5057	● 5206	○ 5110
	● 5058	● 5207	● 5111
	🌈 Custom RAL	○ 5059 Asymmetric	🌈 Custom RAL
		● 5060 Asymmetric	
		● 5212 Asymmetric	
	● 5213 Asymmetric		
	🌈 Custom RAL		

1/10/30

1/50

1/20





🕒 Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,9 | CRI ≥85 | 40° | 50/60 Hz | TRIAC DIMM | RT 2012 REGLEMENTATION THERMIQUE | +45°C / -20°C | CCT SWITCH



Nano Oxo r recessed

Nano Oxo sq recessed

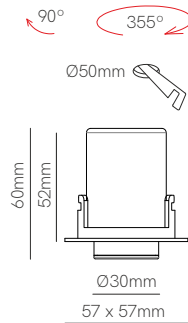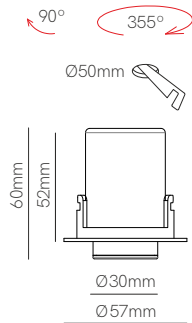

Technical Information

Power	4W	4W
Driver	40 VDC 100mA	40 VDC 100mA
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	380 lm	380 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="radio"/> 4549-N <input checked="" type="radio"/> 4551-N <input type="checkbox"/> Custom RAL	<input type="checkbox"/> 4550-N <input checked="" type="checkbox"/> 4552-N <input type="checkbox"/> Custom RAL





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | | | 45° | 50/60 Hz | | +50°C / -20°C | | 1/10/50



Mini Oxo r recessed

Mini Oxo sq recessed

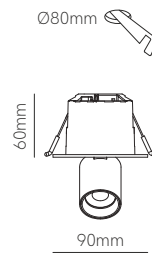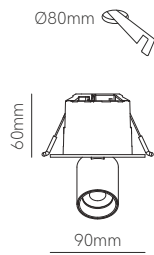

Technical Information

Power	6W	6W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	600 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	○ 5061 ● 5062	□ 5108 ■ 5109



3 YEARS WARRANTY | 25.000 HOURS | → | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | | 42° | 50/60 Hz | | +40°C / -20°C | CCT SWITCH | 1/20



Mini Oxo rect 2 recessed

Mini Oxo rect 4 recessed







Mini Oxo rect 6 recessed



130X80mm

227X80mm

325X80mm

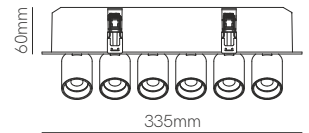

Technical Information

Power	12W	24W	36W
Driver	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.200 lm	2.400 lm	3.600 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black
Code	<input type="checkbox"/> 5063 <input checked="" type="checkbox"/> 5064	<input type="checkbox"/> 5065 <input checked="" type="checkbox"/> 5066	<input type="checkbox"/> 5067 <input checked="" type="checkbox"/> 5068

1/10

1/10

1/5







3 YEARS WARRANTY | 25.000 HOURS | → | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | | 42° | 50/60 Hz | | +40°C / -20°C | CCT SWITCH



Institut Ferrés Amat, Barcelona (Spain). Lighting project: Vié Il·luminació. Architecture: Pablo Amorós.

Oxo r dimm recessed

Oxo sq dimm recessed



Ø63mm

Ø109mm

Ø63mm

109x109mm



RECESSED

Technical Information

Power	12W	12W
Driver	40 VDC 300 mA	40 VDC 300 mA
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.260 lm	1.260 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	<input type="radio"/> 4457-D(N) <input type="radio"/> 4458-D(N) <input checked="" type="radio"/> Custom RAL	<input type="checkbox"/> 4459-D(N) <input type="checkbox"/> 4460-D(N) <input checked="" type="checkbox"/> Custom RAL


Accessories



Included with:  
4457-D(N) / 4459-D(N)



Included with:  
4457-D(N) / 4458-D(N) / 4459-D(N) / 4460-D(N)



ⓘ Consult delivery terms and conditions.



3 YEARS WARRANTY | 30.000 HOURS | → | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 15° 38° 60° | 50/60 Hz | TRIAC DIMM | | +50°C -20°C | CCT SWITCH | 1/20



Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicigo Studio.

Mini Bora recessed

Bora recessed

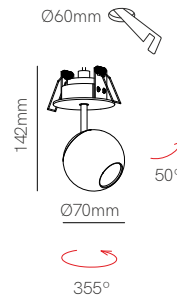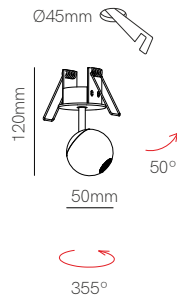

RECESSED

Technical Information

Power	4,5W	8,5W
Driver	12 VDC 350mA	18 VDC 350mA
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code	○ 2.700K 4589	○ 2.700K 4597
	○ 3.000K 4590	○ 3.000K 4598
	● 2.700K 4591	● 2.700K 4599
	● 3.000K 4592	● 3.000K 4600
	○ 2.700K 4593	○ 2.700K 4601
	○ 3.000K 4594	○ 3.000K 4602
	○ 2.700K 4595	○ 2.700K 4603
	○ 3.000K 4596	○ 3.000K 4604

UGR <10 | PF >0,5 | 38°


UGR <15 | PF >0,6 | 36°



3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C / -20°C | 1/18




Nano Tram recessed



H=45.5mm

36X65mm

Mini Tram recessed

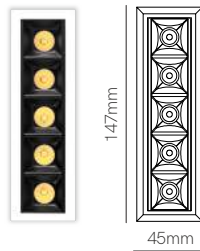

H=45.5mm

36X137mm


Tram recessed



H=45.5mm

36X270mm

Tram XL recessed

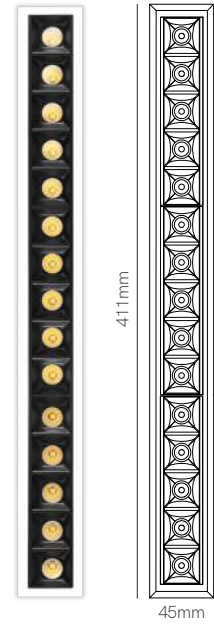

H=45.5mm

36X403mm



\*Tuya version need Tuya Smart App to work.




RECESSED

Technical Information

Power	6W	10W	20W	30W
Driver	24 VDC 250mA	42 VDC 350mA	42 VDC 550mA	42 VDC 800mA
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Dali 2.700K - 6.000K	Tuya 2.700K - 6.000K	Tuya 2.700K -6.000K
Lumens	220 lm	500 lm	1.000 lm	1.500 lm
Material	Aluminium	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black	White / Black
Code	<input type="checkbox"/> 4731 Tuya <input checked="" type="checkbox"/> 4732-V2 Dali	<input type="checkbox"/> 4733-V2 <input checked="" type="checkbox"/> 4734-V2	<input type="checkbox"/> 4735 Tuya <input checked="" type="checkbox"/> 4736-V2 Dali	<input type="checkbox"/> 4737 <input checked="" type="checkbox"/> 4738

Accessories






\*See page 324 for Gateway additional info.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <14 | PF >0,9 | CRI ≥90 | 30° | 50/60 Hz | IK06 | +40°C / -10°C



Compac r recessed

Compac sq recessed



Technical Information

Power	8W	8W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	594 lm / 607 lm / 660 lm	594 lm / 607 lm / 660 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	<input type="radio"/> 2.700K 3951 <input type="radio"/> 3.000K 3952 <input type="radio"/> 4.000K 3953 <input type="radio"/> Custom RAL	<input type="checkbox"/> 2.700K 3948 <input type="checkbox"/> 3.000K 3949 <input type="checkbox"/> 4.000K 3950 <input type="checkbox"/> Custom RAL




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | PF >0,5 | CRI ≥80 | 90° | 50/60 Hz | TRIAC DIMM | +40°C / -20°C | 1/6/30




Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.


Pulcom r  
recessed




Pulcom sq  
recessed



Pulcom r  
recessed asymm




Pulcom sq  
recessed asymm



Technical Information

Power	8W	8W	8W	8W
Driver	DOB	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed	Recessed
Color Temperature (Switch)	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K	2.700K/3.200K/4.000K
Lumens	800 lm	800 lm	800 lm	800 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black	White / Black
Code	○ 4742 ● 4746 ①  Custom RAL	□ 4744 ■ 4748 ①  Custom RAL	○ 4743 ● 4747 ①  Custom RAL	□ 4745 ■ 4749 ①  Custom RAL



① Consult delivery terms and conditions.







Pulcom led accessory




Pulcom trim

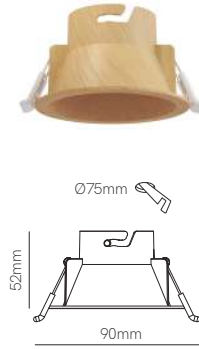

Pulcom asymm trim



Pulcom r surface trim

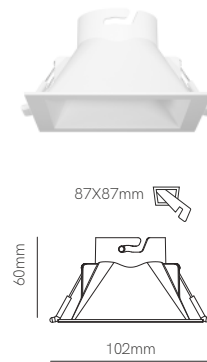


\*Pulcom trim and surface need Pulcom led.

### Technical Information

Power	8W	-	-	-
Driver	DOB	-	-	-
Installation	Surface / Recessed	Recessed	Recessed	Surface
Color Temperature	2.700K/3.200K/4.000K	-	-	-
Lumens	800 lm	-	-	-
Material	Polycarbonate	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black / Wood	White / Black	White / Black / Wood

Code	○ 4763	○ 4761	○ 4821	○ 5034
	● 4764	● 4762	● 4822	● 5035
		● 4935	□ 4825	● 5036
		□ 4823	■ 4826	① 🌈 Custom RAL
		■ 4824	① 🌈 Custom RAL	
		① 🌈 Custom RAL		




① Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C / -20°C | CCT SWITCH



New

Tao recessed

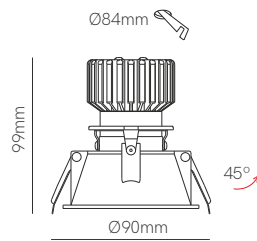

Technical Information

Power	10W
Driver	25-42vdc / 250mA
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	590 lm / 740 lm / 680 lm
Material	Aluminium
Finishes	White / Black

Code	<input type="radio"/> 5718
	<input type="radio"/> 5719
	<input checked="" type="radio"/> Custom RAL





Consult delivery terms and conditions.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 32° | 50/60 Hz | 30° beam angle icon | +50°C / -20°C | CCT SWITCH | 1/30



Noi recessed

Noi dimm recessed



Technical Information

Power	14W	14W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm	1.100 lm / 1.320 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	○ 5019	○ 3.000K 3485 ○ 4.000K 3486

100/277 VAC | CCT SWITCH

220/240 VAC | TRIAC DIMM



3 YEARS WARRANTY | 25.000 HOURS | → | IP 40 | PF >0,9 | CRI ≥80 | | 100° | 50/60 Hz | | +40°C / -20°C | 1/6





Mini Thesis recessed


Thesis recessed




Thesis XL recessed



Ø125mm 




Ø195mm 

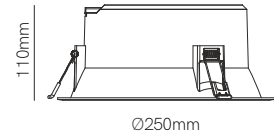Ø230mm 



Technical Information

Power	15W	25W	35W
Driver	DOB	DOB	DOB
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm	3.100 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black	White


Code	<input type="radio"/> 4766 <input type="radio"/> 4987 <input checked="" type="radio"/>  Custom RAL	<input type="radio"/> 4236 <input type="radio"/> 4988 <input checked="" type="radio"/>  Custom RAL	<input type="radio"/> 5030 <input checked="" type="radio"/>  Custom RAL
------	---	---	---









UGR <19 |  1/10

UGR <19 |  1/6

 1/6







 Consult delivery terms and conditions.

3 YEARS WARRANTY | 25.000 HOURS |  →  | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 |  | 90°  | 50/60 Hz |  IK06 |  |  +40°C / -20°C |  CCT SWITCH



Mini Thesis dimm recessed

Thesis dimm recessed



Technical Information

Power	15W	25W
Driver	DOB	DOB
Installation	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.300 lm	2.625 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black
Code	<input type="radio"/> 4767 <input type="radio"/> 5574 <input checked="" type="radio"/> Custom RAL	<input type="radio"/> 4691 <input type="radio"/> 5575 <input checked="" type="radio"/> Custom RAL




ⓘ Consult delivery terms and conditions.





Air recessed

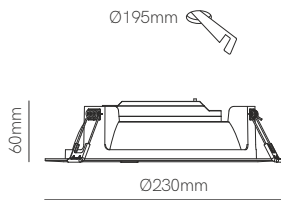


Technical Information

Power	22W
Driver	DOB
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.200 lm
Material	Polybutylene and Polycarbonate
Finishes	White
Code	○ 5018





Bonn recessed

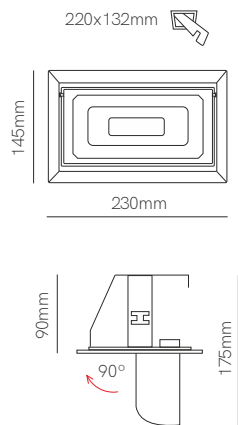

Technical Information

Power	40W
Driver	42vdc / 850mA
Installation	Recessed
Color Temperature	3.000K / 4.100K
Lumens	4.750 lm / 4.800 lm
Material	Aluminium
Finishes	White / Gray

Code	<input type="checkbox"/> 3.000K 4097
	<input type="checkbox"/> 4.100K 4096
	<input type="checkbox"/> 3.000K 4099
	<input type="checkbox"/> 4.100K 4098
	Custom RAL




Consult delivery terms and conditions.


| 
 | 
 | 
 | 
 | 
 | 
 | 
 | 
 +40°C / -20°C |



Fijo recessed




Basculante recessed



45°

Eclipse recessed

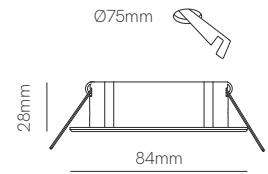

45°



\*G5.3 Bulbholder included.

Technical Information


Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Gray / Brushed chrome	White / Gray / Brushed chrome	Gray / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3	50mm G5.3
Code	<input type="radio"/> 206280M <input checked="" type="radio"/> 206284AL <input checked="" type="radio"/> 206285AL <input checked="" type="radio"/> Custom RAL	<input type="radio"/> 205280M <input checked="" type="radio"/> 205284AL <input checked="" type="radio"/> 205285AL <input checked="" type="radio"/> Custom RAL	<input type="checkbox"/> 222230 <input type="checkbox"/> 222238 <input checked="" type="checkbox"/> Custom RAL

Accessories




Bulbholder GU10

301182






Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50

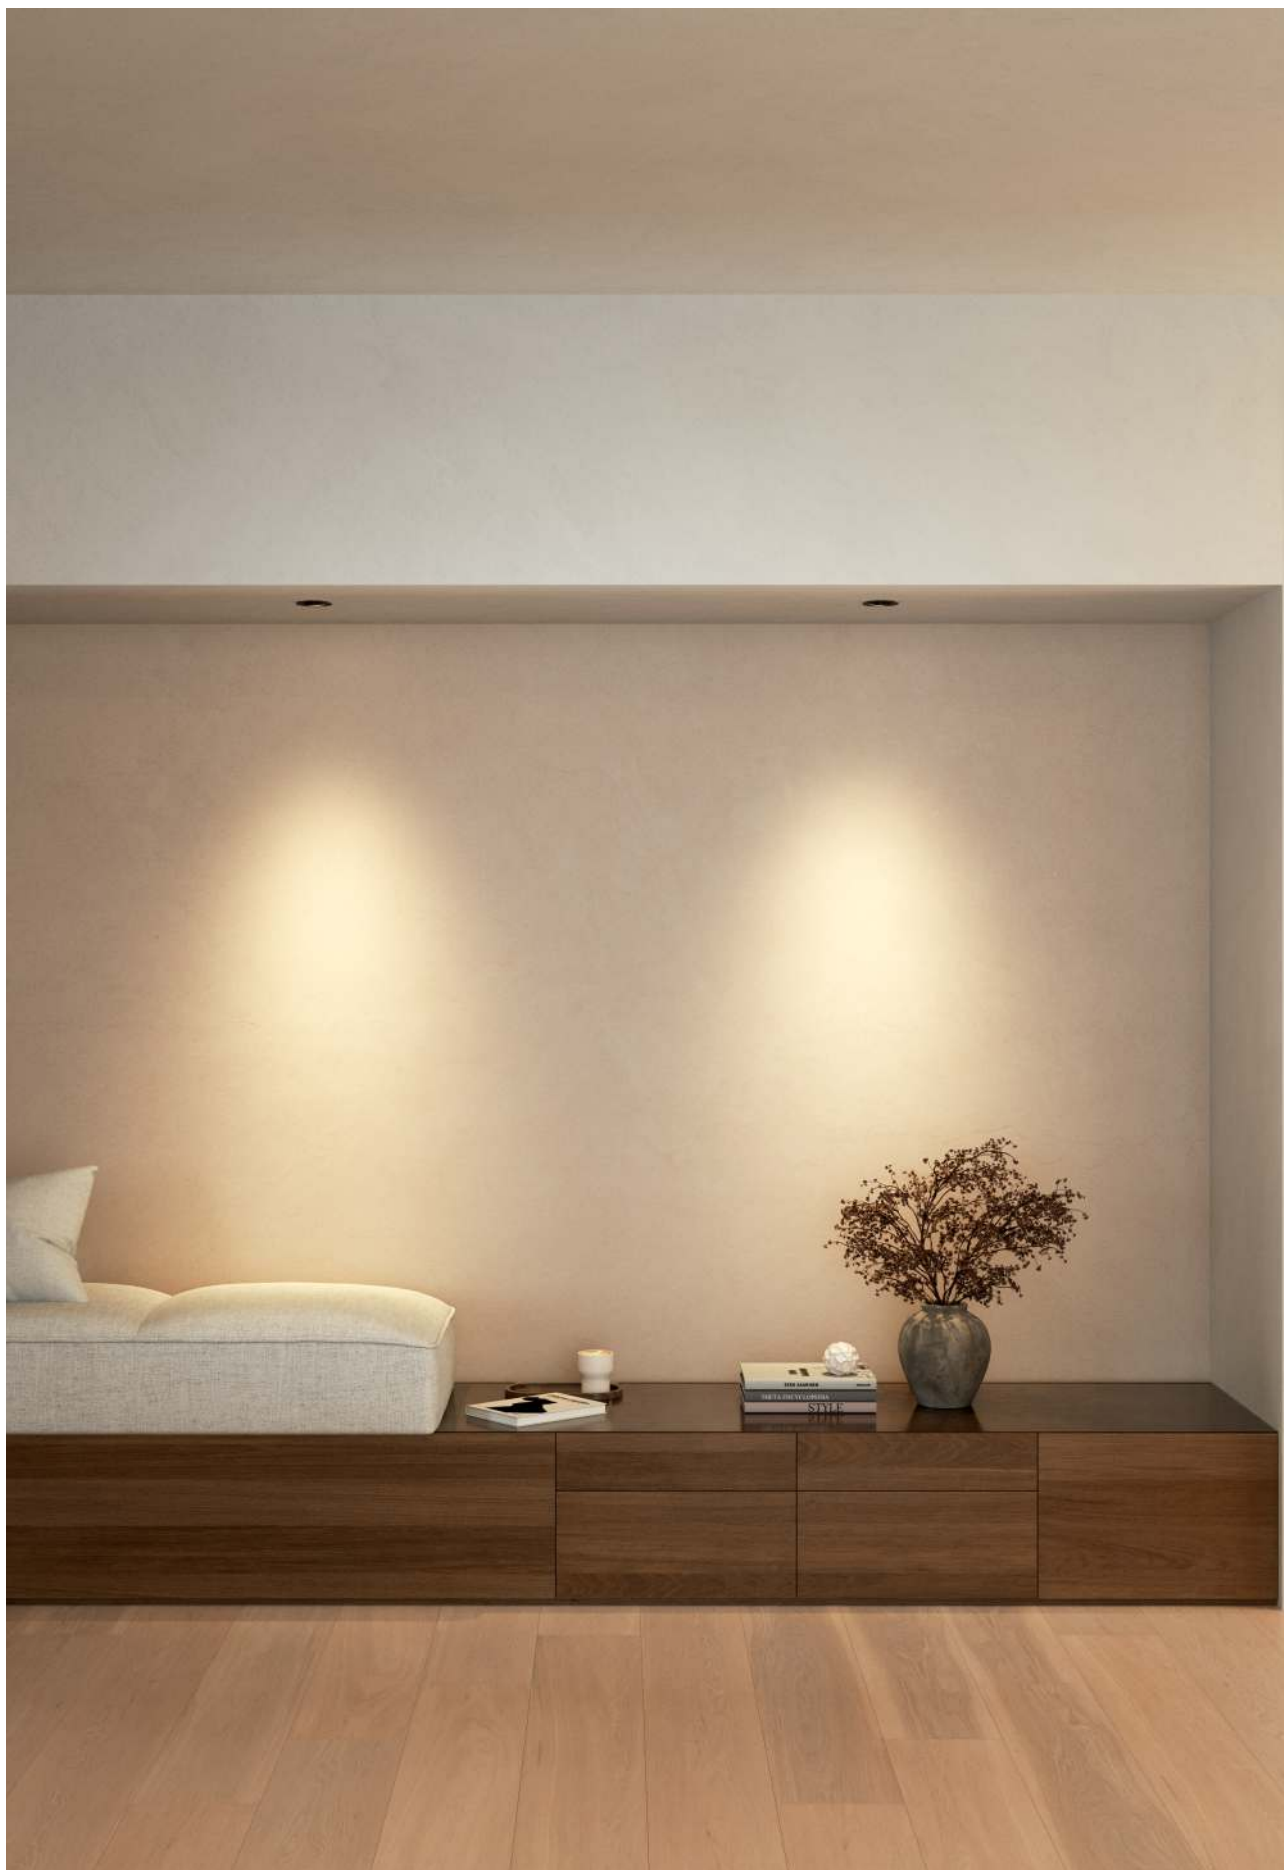



One recessed

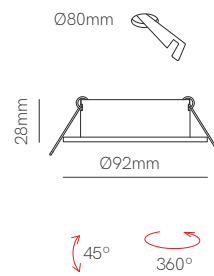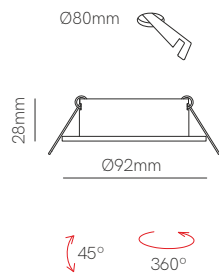
Zio recessed



\*GU10 Bulbholder included, except 258226C and 257226C.

### Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Brushed alumin.	White / Black / Brushed alumin.
Bulbholder	50mm GU10	50mm GU10
Code	<ul style="list-style-type: none"> <li>○ 4478</li> <li>● 4479</li> <li>● 258226C</li> <li>①  Custom RAL</li> </ul>	<ul style="list-style-type: none"> <li>□ 4476</li> <li>■ 4477</li> <li>■ 257226C</li> <li>①  Custom RAL</li> </ul>



① Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 1/50






Luk r recessed



Luk r recessed IP



Luk sq recessed IP



\*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.



Technical Information

Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10	50mm G5.3	50mm G5.3
Code	○ 4758	○ 5214	□ 5216
	● 4759	● 5215	■ 5217
	①  Custom RAL	①  Custom RAL	①  Custom RAL
	IP 20	IP 65	IP 65






① Consult delivery terms and conditions.






Bathroom recessed

Rok recessed



\*G5.3 Bulbholder included.

Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Brushed aluminium	White / Black / Brushed chrome
Bulbholder	50mm G5.3	50mm G5.3
Code	○ 223232	○ 4755
	● 223233	● 4756
		● 4757
		①  Custom RAL
	IP 44	IP 65





① Consult delivery terms and conditions.





Avant r recessed

Avant sq recessed




\*GU10 Bulbholder included.



Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Bulbholder	111mm GU10	111mm GU10
Code	○ 4486 ● 4487 ⓘ  Custom RAL	□ 4484 ■ 4485 ⓘ  Custom RAL



ⓘ Consult delivery terms and conditions.

