



























































































































































Led strips


	Model	Page	Power	Width	CCT
NEW	FINE 20	242	6W/m	8mm	  
NEW	FINE 26	243	6W/m	5mm	  
	FINE 25	305	20W/m	Ø25mm	     
	FINE 30	257	30W/m	20mm	  
	FINE 31	244	12W/m	10mm	   
	FINE 32 N	261	15W/m	12mm	   
	FINE 34	307	5W/m	6mm	  
	FINE 36	274	12W/m	10mm	
	FINE 37	265	14,4W/m	10mm	  
	FINE 41	249	14,4W/m	10mm	   
	FINE 42	277	19,2W/m	10mm	
	FINE 43	282	19,2W/m	12mm	
	FINE 44	271	14,4W/m	10mm	   
	FINE 45	289	10W/m	10mm	  
	FINE 46	281	14,4W/m	10mm	
	FINE 47	288	14,4W/m	12mm	
	FINE 48	235	5W/m	10mm	   
	FINE 49	263	10W/m	4mm	   
	FINE 50	283	9,6W/m	5mm	
	FINE 51	259	9,6W/m	10mm	   
	FINE 52	247	22W/m	10mm	   
	FINE 54	279	14W/m	10mm	
	FINE 55	264	24W/m	20mm	  
	FINE 56	256	22W/m	15mm	   
	FINE 60	285	8W/m	12mm	
	FINE 61	252	15W/m	10mm	   
	FINE 63	273	19W/m	10mm	
	FINE 64	234	2,5W/m	10mm	  
	FINE 66 N	286	20W/m	12mm	

Lumens	CRI	Density	Voltage	IP20	IP54	IP65	IP67
72-84 Lm/W	≥97 CRI	320 LED/m	24 VDC	-			-
98-106 Lm/W	≥90 CRI	400 LED/m	24 VDC		-	-	-
41-73 Lm/W	≥90 CRI	240-480 LED/m	24 VDC	-	-	-	
150-160 Lm/W	≥90 CRI	352 LED/m	24 VDC		-	-	-
85-100 Lm/W	≥90 CRI	512 LED/m	24 VDC		-	-	
100-110 Lm/W	≥80 CRI	112 LED/m	220/240 VAC	-	-		-
28-32 Lm/W	≥90 CRI	196 LED/m	24 VDC	-	-	-	
100 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-	-
126-140 Lm/W	≥90 CRI	160 LED/m	48 VDC		-	-	-
92-102 Lm/W	≥90 CRI	140 LED/m	24 VDC		-		-
90 Lm/W	≥90 CRI	168 LED/m	24 VDC		-		-
90 Lm/W	-	240 LED/m	24 VDC		-	-	-
85-95 Lm/W	75/97 CRI	140 LED/m	24 VDC		-	-	-
15-91 Lm/W	-	480 LED/m	24 VDC		-	-	
38-41 Lm/W	-	144 LED/m	24 VDC		-		-
18-60 Lm/W	-	60 LED/m	24 VDC		-	-	-
110-135 Lm/W	≥90 CRI	160 LED/m	24 VDC		-	-	-
71-77 Lm/W	≥90 CRI	204 LED/m	24 VDC		-	-	-
58 Lm/W	-	120 LED/m	24 VDC		-	-	-
100 Lm/W	≥90 CRI	120 LED/m	24 VDC		-	-	
97-112 Lm/W	-	238 LED/m	24 VDC		-	-	
45-50 Lm/W	-	120 LED/m	24 VDC		-	-	
80-86 Lm/W	≥90 CRI	120 LED/m	24 VDC		-	-	-
130-170 Lm/W	≥80 CRI	160 LED/m	24 VDC		-	-	-
81 Lm/W	-	60 LED/m	24 VDC		-	-	-
110-125 Lm/W	≥90 CRI	160 LED/m	24 VDC		-		-
89-95 Lm/W	≥90 CRI	640 LED/m	24 VDC		-	-	
110-120 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-	-
167 Lm/W	-	840 LED/m	24 VDC		-	-	

	Model	Page	Power	Width	CCT
	FINE 68	250	19,2W/m	10mm	  
	FINE 69	241	9,6W/m	10mm	    
	FINE 70	311	5W/m	12,8mm	   
	FINE 71	287	21W/m	12mm	
	FINE 72	313	10W/m	16mm	   
NEW	FINE 73	316	14,4W/m	19mm	 
	FINE 74	315	10W/m	24mm	   
	FINE 75	260	7W/m	12mm	  
	FINE 76	253	15W/m	12mm	 
	FINE 77	309	8W/m	19mm	   
	FINE 79	251	10W/m	8mm	  
NEW	FINE 81	275	22,5W/m	10mm	 
	FINE 82	245	15W/m	8mm	  
	FINE 84	239	4,8W/m	10mm	   
NEW	FINE 86	267	10W/m	10mm	  
	FINE 88	262	12W/m	5mm	   
NEW	FINE 90	268	10W/m	8mm	  
NEW	FINE 91	269	24W/m	10mm	
	FINE 92	246	10W/m	6mm	  
	FINE 96	255	18W/m	18,5mm	  
	FINE 97	237	10W/m	10mm	
	FINE DMX-4	299	12W/m	12mm	
	FINE DMX-5	301	17W/m	12mm	
	FINE RUNNING	291	12W/m	10mm	 
	FINE SPI-2	293	14W/m	10mm	
	FINE SPI-3	295	11W/m	10mm	
	FINE SPI-4	296	20W/m	Ø25mm	
NEW	FINE SPI-5	297	12W/m	8mm	

Lumens	CRI	Density	Voltage	IP20	IP65	IP67
130-140 Lm/W	≥90 CRI	200 LED/m	24 VDC		-	-
87-102 Lm/W		140 LED/m	24 VDC			-
15-37 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
29-117 Lm/W	-	96 LED/m	24 VDC		-	
26-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
48-51 Lm/W	≥80 CRI	140 LED/m	24 VDC	-	-	
22-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
100-110 Lm/W	≥80 CRI	120 LED/m	220/240 VAC	-		-
120-128 Lm/W	≥90 CRI	126 LED/m	24 VDC		-	-
26-55 Lm/W	≥90 CRI	120 LED/m	24 VDC	-	-	
170-180 Lm/W	≥80 CRI	160 LED/m	24 VDC			-
100 Lm/W	≥80 CRI	216 LED/m	24 VDC		-	-
65-70 Lm/W	≥90 CRI	480 LED/m	24 VDC		-	-
95-102 Lm/W	≥90 CRI	70 LED/m	24 VDC			-
47-95 Lm/W	≥90 CRI	480 LED/m	24 VDC	-	-	
90-110 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
95-110 Lm/W	≥80 CRI	60 LED/m	24 VDC		-	-
95 Lm/W	≥90 CRI	216 LED/m	24 VDC		-	-
80-90 Lm/W	≥97 CRI	320 LED/m	24 VDC		-	-
67,5-120 Lm/W	≥90 CRI	48 LED/m	24 VDC	-	-	
140 Lm/W	-	160 LED/m	24 VDC		-	-
42 Lm/W	-	70 LED/m	24 VDC	-	-	
50 Lm/W	-	70 LED/m	24 VDC		-	
79-87 Lm/W	≥90 CRI	360 LED/m	24 VDC		-	-
37 Lm/W	-	84 LED/m	24 VDC		-	-
51 Lm/W	-	60 LED/m	24 VDC		-	-
12,5 Lm/W	-	168 LED/m	24 VDC	-	-	
48 Lm/W	-	60 LED/m	24 VDC		-	-


Fine 64

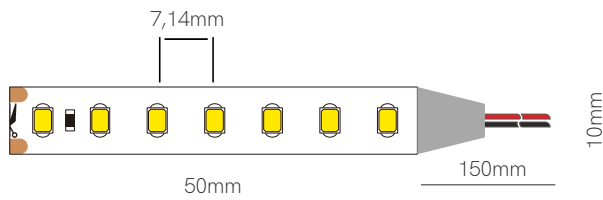

1,5mm | IP20



Compatible profiles.



Technical Information

V / A / W

24V / 0,1A / 2,5W/m

Code	Lumens/w	Lumens/m	CCT	IP
64270	110 lm/w	275 lm/m	2700K	IP20
64300	115 lm/w	287 lm/m	3000K	IP20
64400	120 lm/w	300 lm/m	4000K	IP20

Accessories




Joint
13,8x11,55x3,9mm
 20220



Joint
13,55x11,67x4,7mm
 20120


*Available in reel of 10 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 2,5 W/m | 140 LED/m | CRI ≥90 | III | 24 VDC | 50mm LM-80 2835

Fine 48

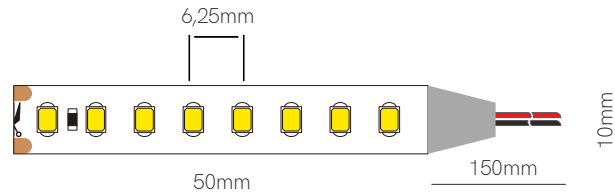

1,5mm | IP20

Compatible profiles.



Technical Information

V / A / W

24V / 0,2A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	48220	110 lm/w	550 lm/m	2200K	IP20
	48270	120 lm/w	600 lm/m	2700K	IP20
	48300	130 lm/w	650 lm/m	3000K	IP20
	48400	135 lm/w	675 lm/m	4000K	IP20
	48225	110 lm/w	550 lm/m	2200K	IP65
	48275	120 lm/w	600 lm/m	2700K	IP65
	48305	130 lm/w	650 lm/m	3000K	IP65
	48405	135 lm/w	675 lm/m	4000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 10 meters. Accessories pages 317-319.



5 YEARS WARRANTY

5 W/m

160 LED/m

CRI ≥90

III

24 VDC

50mm



LM-80




2835




▶ VIDEO



Fine 97

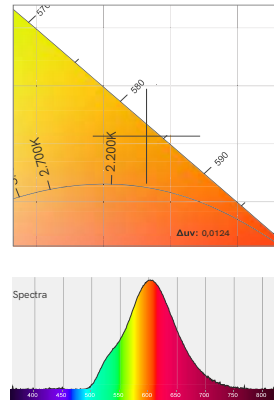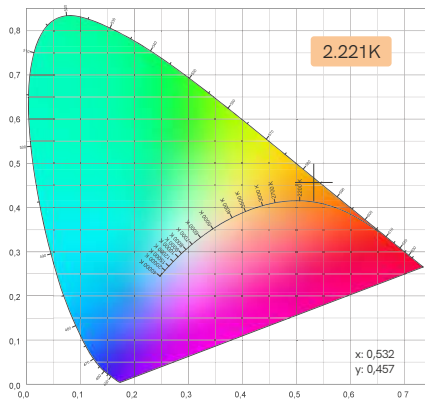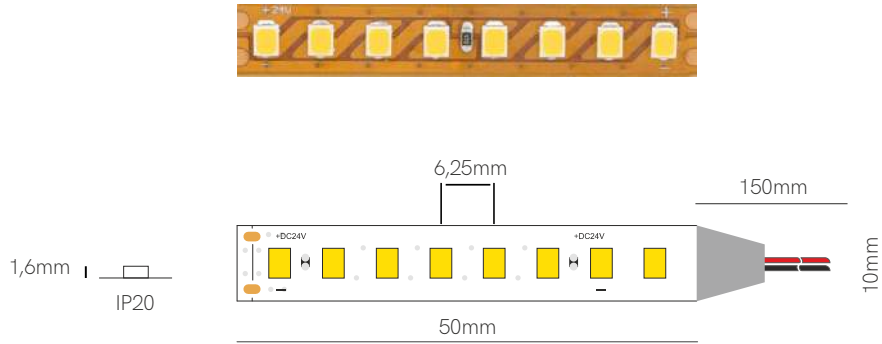

Compatible profiles.



Technical Information

V / A / W 24V / 0,4A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
97220	140 lm/w	1.400 lm/m	2200K	IP20

Accessories




Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters. Accessories pages 317-319.



5 YEARS WARRANTY

10 W/m

160 LED/m



24 VDC


50mm






Casa Aliso, Vitoria (Spain). Interior design: WOOD STUDIO. Photography: Vicugo Studio.

Fine 84

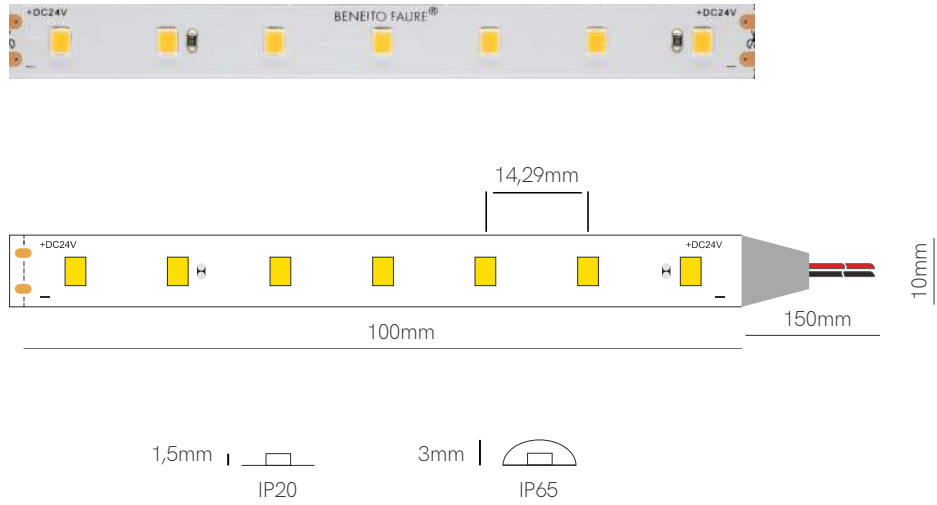

Compatible profiles.



Technical Information

V / A / W

24V / 0,2A / 4,8W/m

Code	Lumens/w	Lumens/m	CCT	IP
84270	95 lm/w	456 lm/m	2700K	IP20
84300	98 lm/w	470 lm/m	3000K	IP20
84400	100 lm/w	480 lm/m	4000K	IP20
84600	102 lm/w	489 lm/m	6000K	IP20
84275	90 lm/w	432 lm/m	2700K	IP65
84305	92 lm/w	441 lm/m	3000K	IP65
84405	95 lm/w	456 lm/m	4000K	IP65
84605	97 lm/w	465 lm/m	6000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125




Joint
15,4x11,5x5,7mm
■ 20991



Joint
21,6x11,5x5,7mm
■ 20999

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

4,8 W/m

70 LED/m

CRI >90

III

24 VDC

100mm



LM-80

2835




Building contractor: Construplan Construcciones y planificación S.L.U. Photography: David Rodríguez.




Architecture: Room C Studio, Gran Canaria (Spain).

Fine 69

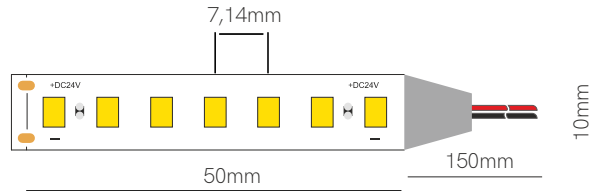

Compatible profiles.



Technical Information

V / A / W

24V / 0,4A / 9,6W/m

Code	Lumen/w	Lumen/m	CCT	IP
69220	87 lm/w	835 lm/m	2200K	IP20
69270	95 lm/w	912 lm/m	2700K	IP20
69300	98 lm/w	940 lm/m	3000K	IP20
69400	100 lm/w	960 lm/m	4000K	IP20
69600	102 lm/w	979 lm/m	6000K	IP20
69225	87 lm/w	835 lm/m	2200K	IP65
69275	90 lm/w	864 lm/m	2700K	IP65
69305	92 lm/w	883 lm/m	3000K	IP65
69405	95 lm/w	912 lm/m	4000K	IP65
69605	97 lm/w	931 lm/m	6000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120




Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

9,6 W/m

140 LED/m




24 VDC

50mm




New

Fine 20

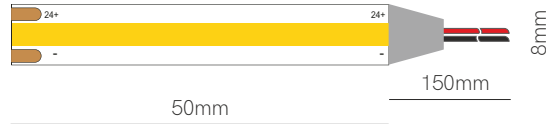

Compatible profiles.



Technical Information

V / A / W 24V / 0,25A / 6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	20274	72 lm/w	432 lm/m	2700K	IP54
	20304	78 lm/w	468 lm/m	3000K	IP54
	20404	84 lm/w	504 lm/m	4000K	IP54

Accessories





*Available in reel of 10 meters.

Accessories pages 317-319.




New

Fine 26



Compatible profiles.



Technical Information

V / A / W

24V / 0,25A / 6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	26270	98 lm/w	588 lm/m	2700K	IP20
	26300	101 lm/w	606 lm/m	3000K	IP20
	26400	106 lm/w	636 lm/m	4000K	IP20

Accessories




Connector Cable
20518




Joint
20528

*Available in reel of 5 meters.


Accessories pages 317-319.



Fine 31

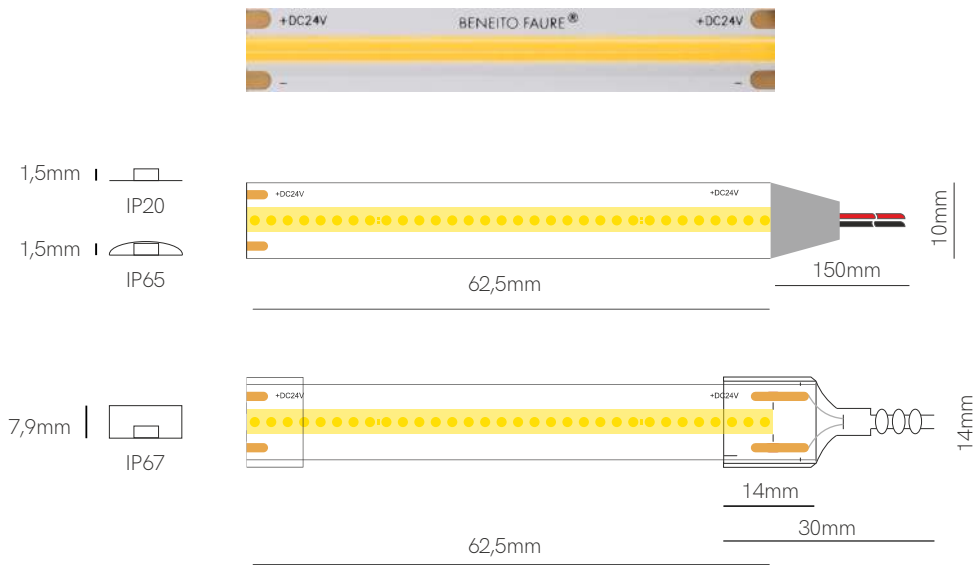

Compatible profiles.



Technical Information

V / A / W

24V / 0,5A / 12W/m

Code	Lumens/w	Lumens/m	CCT	IP
31220	85 lm/w	1.020 lm/m	2200K	IP20
31270	95 lm/w	1.140 lm/m	2700K	IP20
31300	98 lm/w	1.176 lm/m	3000K	IP20
31400	100 lm/w	1.200 lm/m	4000K	IP20
31225 <i>New</i>	85 lm/w	1.020 lm/m	2200K	IP65
31275 <i>New</i>	95 lm/w	1.140 lm/m	2700K	IP65
31305 <i>New</i>	98 lm/w	1.176 lm/m	3000K	IP65
31405 <i>New</i>	100 lm/w	1.200 lm/m	4000K	IP65
31227	80 lm/w	960 lm/m	2200K	IP67
31277	90 lm/w	1.080 lm/m	2700K	IP67
31307	93 lm/w	1.116 lm/m	3000K	IP67
31407	95 lm/w	1.140 lm/m	4000K	IP67

Accessories



*Available in reel of 5 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

12 W/m

512 LED/m





24 VDC


62,5mm



Fine 82

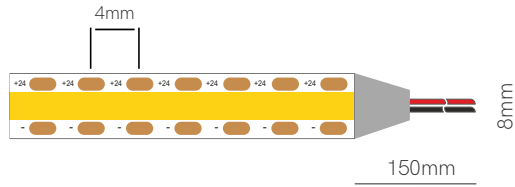

Compatible profiles.



Technical Information

V / A / W

24V / 0,63A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	82270	65 lm/w	650 lm/m	2700K	IP20
	82300	65 lm/w	650 lm/m	3000K	IP20
	82400	70 lm/w	700 lm/m	4000K	IP20

Accessories



Connector Cable

20818



Joint

20828



L Joint

20838




L Joint

20T90

*Available in reel of 10 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

10 W/m

480 LED/m

CRI ≥90



24 VDC



Free cut




LM-80



Fine 92

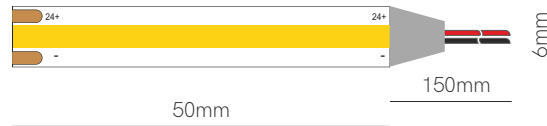

Compatible profiles.




Technical Information

V / A / W 24V / 0,42A / 10W/m


Code	Lumens/w	Lumens/m	CCT	IP
92270	80 lm/w	800 lm/m	2700K	IP20
92300	85 lm/w	850 lm/m	3000K	IP20
92400	90 lm/w	900 lm/m	4000K	IP20

*Available in reel of 10 meters.

Accessories pages 317-319.



Fine 52

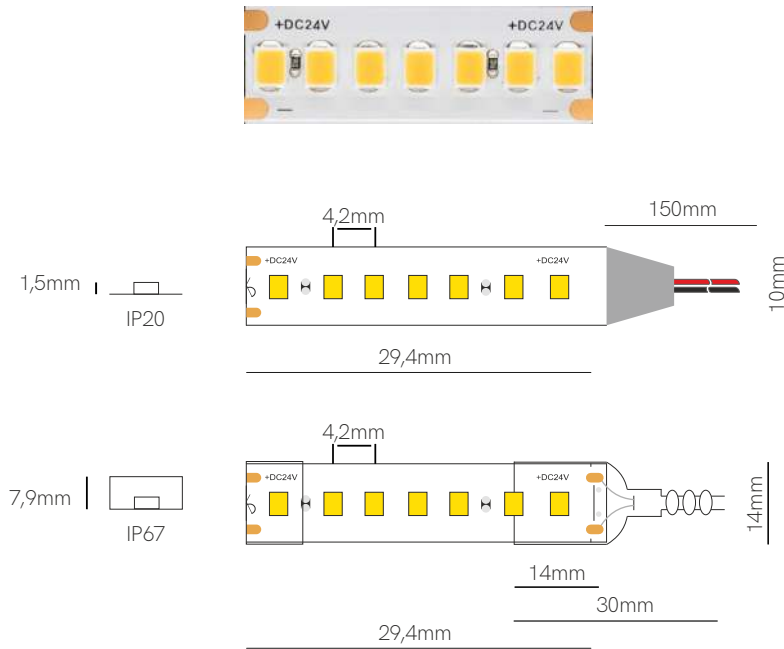

Technical Information

V / A / W 24V / 0,91A / 22W/m


Code	Code	Lumens/w	Lumens/m	CCT	IP
	52270	97 lm/w	2.134 lm/m	2700K	IP20
	52300	103 lm/w	2.266 lm/m	3000K	IP20
	52400	108 lm/w	2.376 lm/m	4000K	IP20
	52600	112 lm/w	2.464 lm/m	6000K	IP20
	52277	97 lm/w	2.134 lm/m	2700K	IP67
	52307	103 lm/w	2.266 lm/m	3000K	IP67
	52407	108 lm/w	2.376 lm/m	4000K	IP67
	52607	112 lm/w	2.464 lm/m	6000K	IP67

Accessories





*Available in reel of 5 meters.

Accessories pages 317-319.






Fine 41

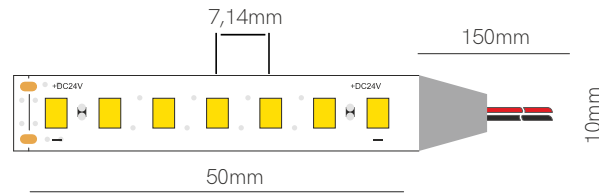

Compatible profiles.



Technical Information

V / A / W

24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	41270	95 lm/w	1.368 lm/m	2700K	IP20
	41300	98 lm/w	1.411 lm/m	3000K	IP20
	41400	100 lm/w	1.440 lm/m	4000K	IP20
	41600	102 lm/w	1.468 lm/m	6000K	IP20
	41275	90 lm/w	1.296 lm/m	2700K	IP65
	41305	92 lm/w	1.324 lm/m	3000K	IP65
	41405	95 lm/w	1.368 lm/m	4000K	IP65
	41605	97 lm/w	1.396 lm/m	6000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

14,4 W/m

140 LED/m




24 VDC


50mm



Fine 68

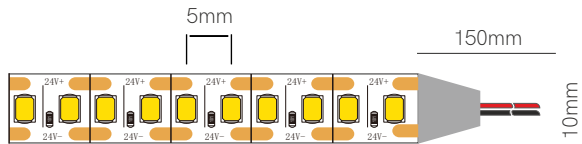

Compatible profiles.



Technical Information

V / A / W

24V / 0,8A / 19,2W/m

Code	Lumens/w	Lumens/m	CCT	IP
68270	130 lm/w	2.496 lm/m	2700K	IP20
68300	135 lm/w	2.592 lm/m	3000K	IP20
68400	140 lm/w	2.688 lm/m	4000K	IP20

Accessories




Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 5 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

19,2 W/m

200 LED/m

CRI ≥90

III


24 VDC

Free cut


LM-80

2835

Fine 79

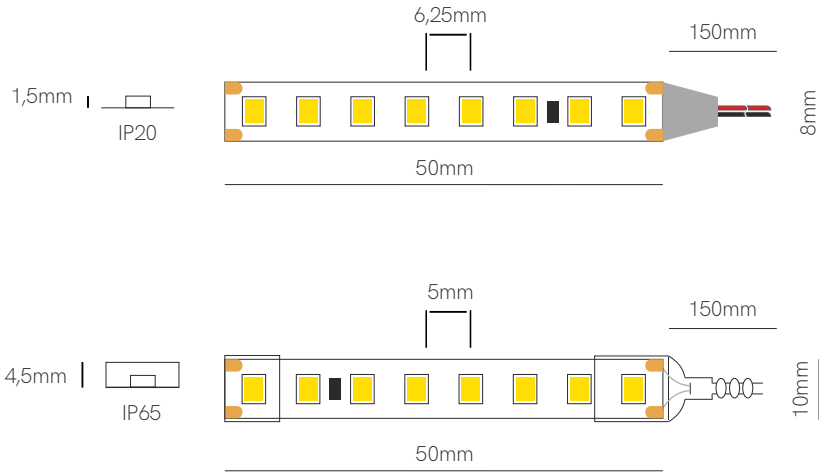

Compatible profiles.



Technical Information

V / A / W 24V / 0,42A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
79270	170 lm/w	1.700 lm/m	2700K	IP20
79300	175 lm/w	1.750 lm/m	3000K	IP20
79400	180 lm/w	1.800 lm/m	4000K	IP20
79275	170 lm/w	1.700 lm/m	2700K	IP65
79305	175 lm/w	1.750 lm/m	3000K	IP65
79405	180 lm/w	1.800 lm/m	4000K	IP65

Accessories



End cap
20825



End cap
20865



Connector Cable
20818



Joint
20828



L Joint
20838





L Joint
20T90

*Available in reel of 5 meters. Accessories pages 317-319.




5 YEARS WARRANTY | 10 W/m | 160 LED/m | CRI ≥80 | III | 24 VDC | 50mm | LM-80 | 2835

Fine 61

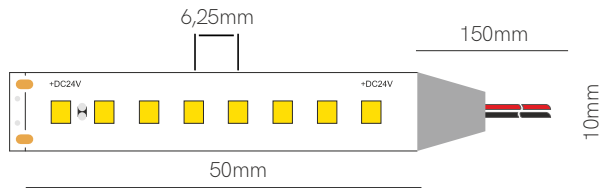

Compatible profiles.



Technical Information

V / A / W

24V / 0,62A / 15W/m

Code	Lumens/w	Lumens/m	CCT	IP
61270	110 lm/w	1.650 lm/m	2700K	IP20
61300	115 lm/w	1.725 lm/m	3000K	IP20
61400	120 lm/w	1.800 lm/m	4000K	IP20
61600	125 lm/w	1.875 lm/m	6000K	IP20
61275	110 lm/w	1.650 lm/m	2700K	IP65
61305	115 lm/w	1.725 lm/m	3000K	IP65
61405	120 lm/w	1.800 lm/m	4000K	IP65
61605	125 lm/w	1.875 lm/m	6000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120




Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

15 W/m

160 LED/m

CRI ≥90



24 VDC





50mm




LM-80



Fine 76

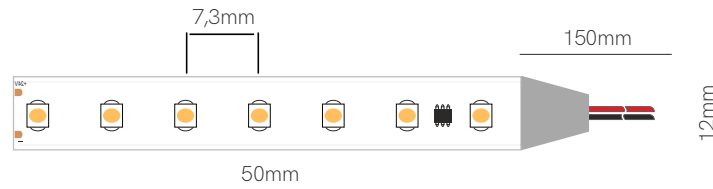

Compatible profiles.



Technical Information


V / A / W 24V / 0,62A / 15W/m

Code	Lumens/w	Lumens/m	CCT	IP
76300	120 lm/w	1.800 lm/m	3000K	IP20
76400	128 lm/w	1.920 lm/m	4000K	IP20


*Available in reel of 5 meters.

Accessories pages 317-319.



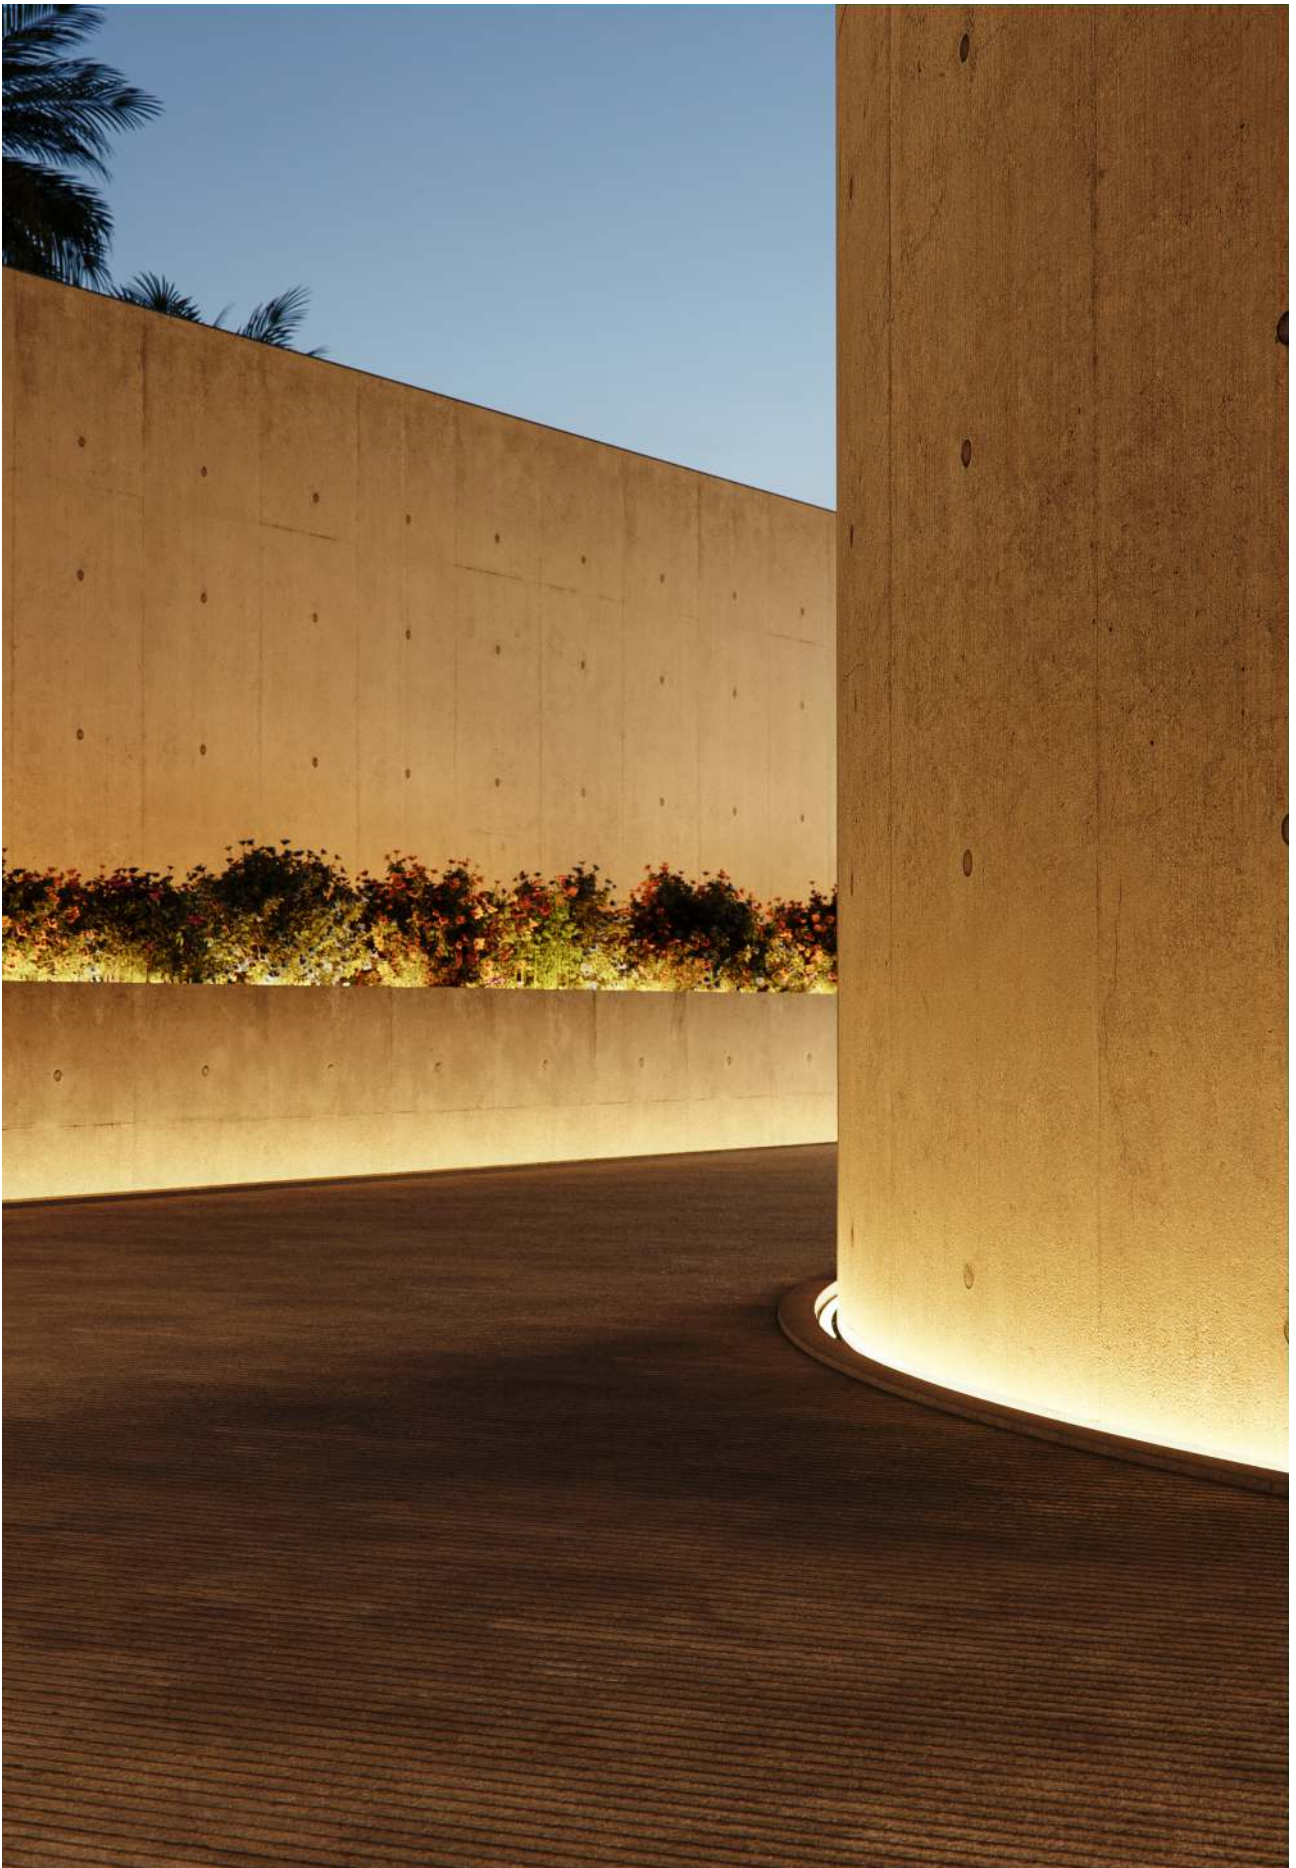

Fine 96

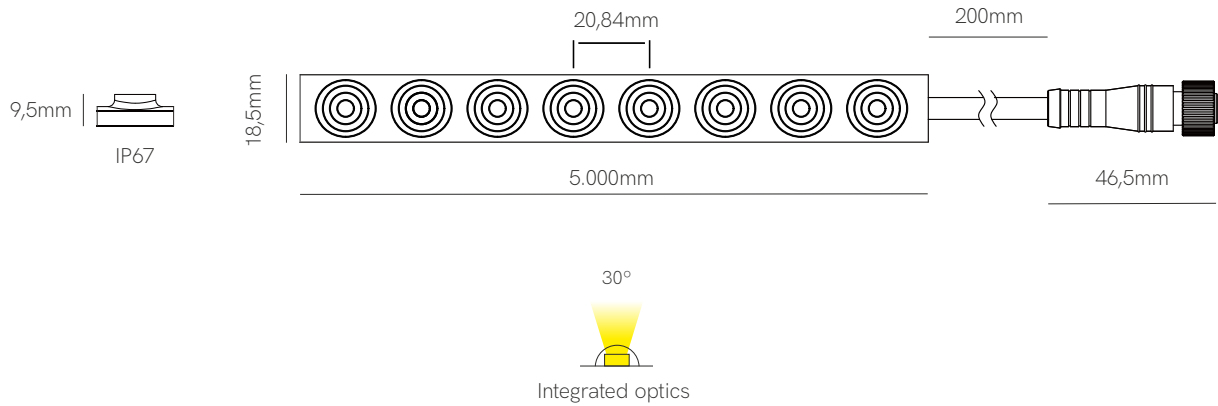

Compatible profiles.



Technical Information

V / A / W (3.000K / 4.000K)	24V / 0,75A / 20W/m
V / A / W (RGB-W)	24V / 0,33A / 20W/m
Red	44 lm/w 5W
Green	89 lm/w 5W
Blue	25 lm/w 5W
White	77 lm/w 5W

Code	Code	Lumens/w	Lumens/m	CCT	IP
	96307	71 lm/w	1.915 lm/m	3000K	IP67
	96407	74 lm/w	2.167 lm/m	4000K	IP67
	96477	55 lm/w	1.200 lm/m	RGB-W 3.000K	IP67

Accessories

*Available in reel of 5 meters. Accessories pages 317-319.



3 YEARS WARRANTY

18/8 W/m

42 LED/m






24 VDC


monocolor 23,81mm rgb-w 166mm



Fine 56

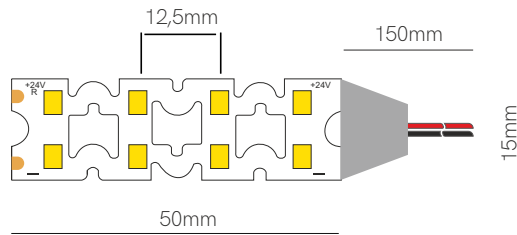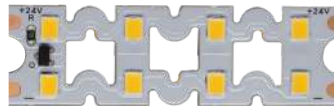

Compatible profiles.



Technical Information

V / A / W 24V / 0,91A / 22W/m

Code	Lumens/w	Lumens/m	CCT	IP
56270	155 lm/w	3.410 lm/m	2700K	IP20
56300	160 lm/w	3.520 lm/m	3000K	IP20
56400	170 lm/w	3.740 lm/m	4000K	IP20
56360	130 lm/w	2.860 lm/m	2.700-6.000K	IP20




*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 | III | 24 VDC | 50 mm | LM-80 | 2835

Fine 30

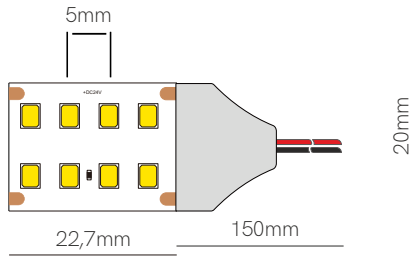

Compatible profiles.




Technical Information

V / A / W 24V / 1,25A / 30W/m

Code	Lumens/w	Lumens/m	CCT	IP
30270	152 lm/w	4.560 lm/m	2700K	IP20
30300	161 lm/w	4.826 lm/m	3000K	IP20
30400	169 lm/w	5.069 lm/m	4000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

30 W/m

352 LED/m





24 VDC

22,7mm






Fine 51

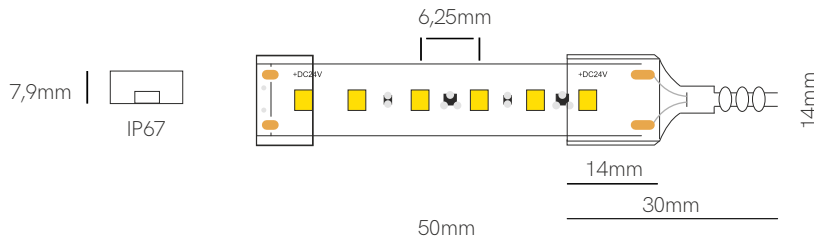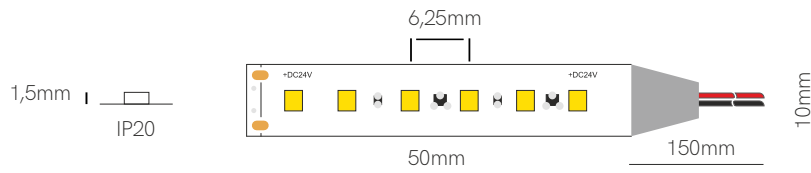

Compatible profiles.



Technical Information

V / A / W

24V / 0,4A / 9,6W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	51270	100 lm/w	960 lm/m	2700K	IP20
	51300	100 lm/w	960 lm/m	3000K	IP20
	51400	100 lm/w	960 lm/m	4000K	IP20
	51600	100 lm/w	960 lm/m	6000K	IP20
	51277	100 lm/w	960 lm/m	2700K	IP67
	51307	100 lm/w	960 lm/m	3000K	IP67
	51407	100 lm/w	960 lm/m	4000K	IP67
	51607	100 lm/w	960 lm/m	6000K	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,8x11,65x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 20 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

9,6 W/m

120 LED/m

CRI ≥90



24 VDC

ULTRALONG


50mm




LM-80

2835

Fine 75

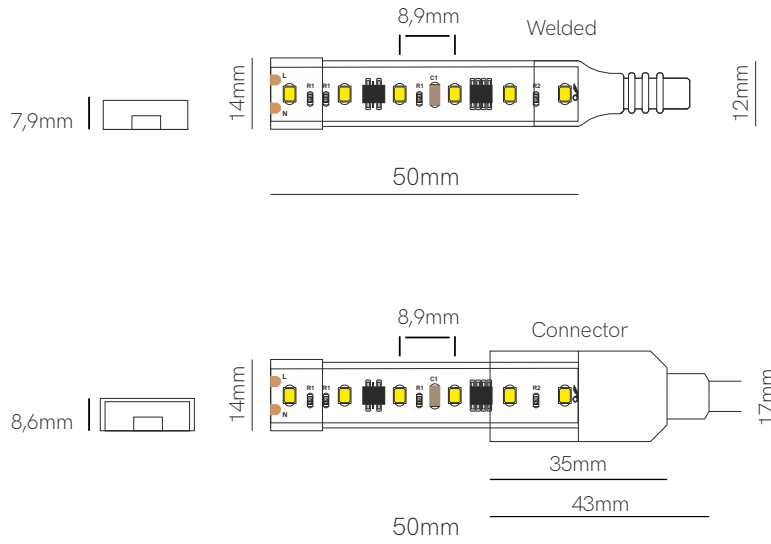

Compatible profiles.



Technical Information

V / A / W 220V / 0,03A / 7W/m

Code	Code	Lumen/w	Lumen/m	CCT	IP
	75275	100 lm/w	700 lm/m	2700K	IP65
	75305	105 lm/w	735 lm/m	3000K	IP65
	75405	110 lm/w	770 lm/m	4000K	IP65

Accessories




*Available in reel of 50 meters. Accessories pages 317-319.




3 YEARS WARRANTY | 7 W/m | 120 LED/m | CRI ≥80 | 220/240 VAC | 50mm | TRIAC DIMM 30-100% | LM-80 | 2835

Fine 32 N

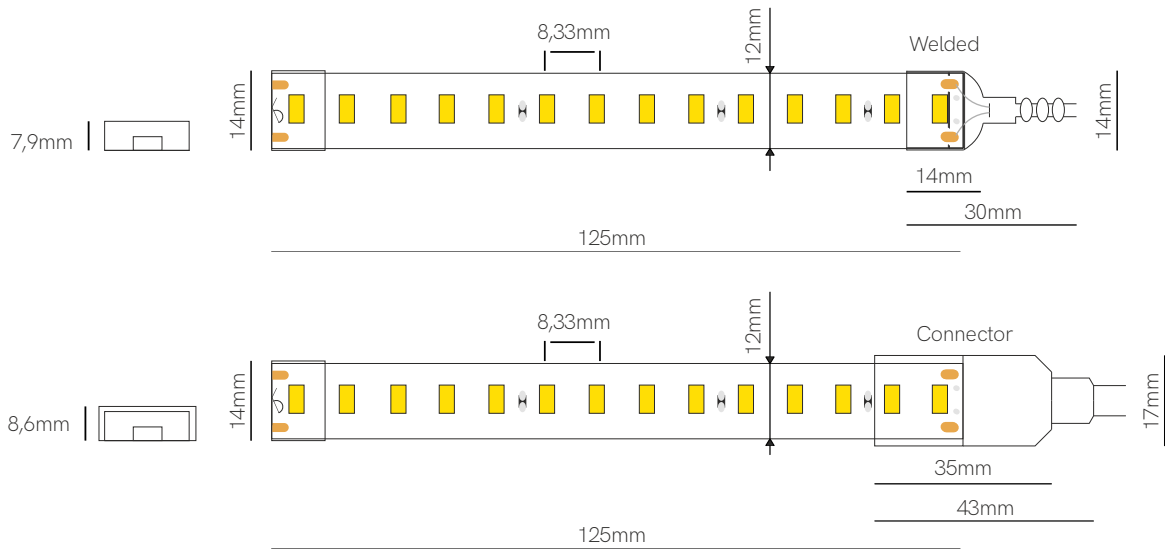

Compatible profiles.



Technical Information


V / A / W 220V / 0,068A / 15W/m

Code	Lumen/w	Lumen/m	CCT	IP
32275-N	100 lm/w	1.500 lm/m	2700K	IP65
32305-N	105 lm/w	1.575 lm/m	3000K	IP65
32405-N	110 lm/w	1.650 lm/m	4000K	IP65
32605-N	110 lm/w	1.650 lm/m	6000K	IP65

Accessories




*Available in reel of 5 or 50 meters. Accessories pages 317-319.



3 YEARS WARRANTY | 15 W/m | 112 LED/m | CRI ≥80 | 220/240 VAC | 125mm | TRIAC DIMM 30-100% | LM-80 | 2835

Fine 88




50mm

2mm | IP20



Compatible profiles.



Technical Information

V / A / W

24V / 0,5A / 12W/m

Code	Lumens/w	Lumens/m	CCT	IP
88220	90 lm/w	1.080 lm/m	2200K	IP20
88270	100 lm/w	1.200 lm/m	2700K	IP20
88300	105 lm/w	1.260 lm/m	3000K	IP20
88400	110 lm/w	1.320 lm/m	4000K	IP20

Accessories




Connector Cable
20518



Joint
20528



*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | III | 24 VDC | 50mm LM-80 2835

Fine 49

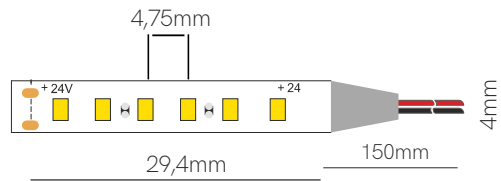

Compatible profiles.




Technical Information

V / A / W 24V / 0,4A / 10W/m



Code	Lumens/w	Lumens/m	CCT	IP
49270	71 lm/w	710 lm/m	2700K	IP20
49300	74 lm/w	740 lm/m	3000K	IP20
49400	77 lm/w	770 lm/m	4000K	IP20
49600	74 lm/w	740 lm/m	6000K	IP20

*Available in reel of 5 meters.


Accessories pages 317-319.



Fine 55

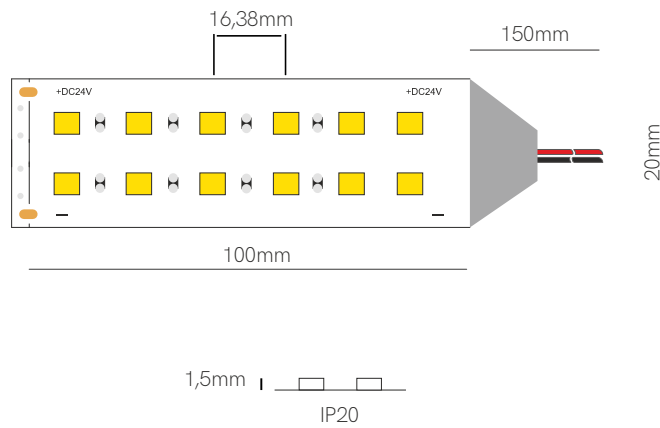

Compatible profiles.



Technical Information

V / A / W

24V / 1A / 24W/m




Code	Code	Lumens/w	Lumens/m	CCT	IP
	55270	84 lm/w	2.016 lm/m	2700K	IP20
	55300	89 lm/w	2.136 lm/m	3000K	IP20
	55400	94 lm/w	2.256 lm/m	4000K	IP20

*Available in reel of 5 meters.


Accessories pages 317-319.



Fine 37

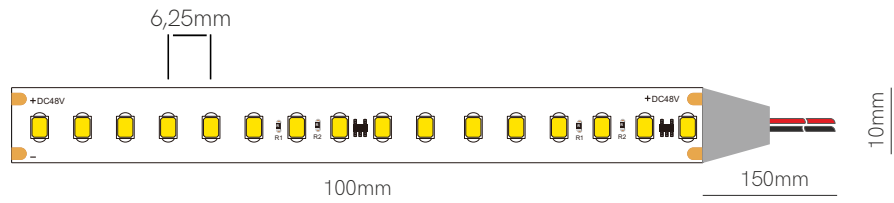

Compatible profiles.



Technical Information

V / A / W 48V / 0,3A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	37270	126 lm/w	1.815 lm/m	2700K	IP20
	37300	135 lm/w	1.944 lm/m	3000K	IP20
	37400	140 lm/w	2.016 lm/m	4000K	IP20

Power supply 48V (page 366).

Accessories




Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120

*Available in reel of 25 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

14,4 W/m

160 LED/m



48 VDC


100mm






New

Fine 86

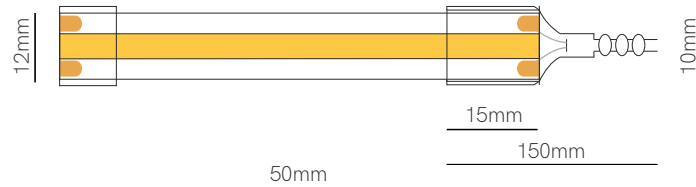

Compatible profiles.



Technical Information

V / A / W

24V / 0,42A / 10W/m / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	86277	95 lm/w	950 lm/m	2700K	IP67
	86307	95 lm/w	950 lm/m	3000K	IP67
	86467	95 lm/w	1.140 lm/m	RGB-W 3.000K	IP67

Accessories



End Cap
32635

End Cap
32625

*Available in reel of 5 meters.


Accessories pages 317-319.



5 YEARS WARRANTY | 10 W/m 2700K 3000K | 12 W/m RGB-W | 480 LED/m | CRI ≥90 | III | 24 VDC | 50mm | LM-80 | COB

New


Fine 90

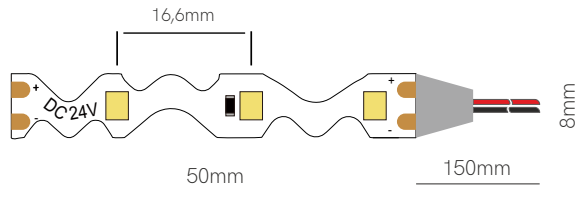

1,5mm | IP20



Compatible profiles.




Technical Information

V / A / W 24V / 0,42A / 10W/m

Code	Lumens/w	Lumens/m	CCT	IP
90270	95 lm/w	950 lm/m	2700K	IP20
90300	105 lm/w	1.050 lm/m	3000K	IP20
90400	110 lm/w	1.100 lm/m	4000K	IP20

*Available in reel of 5 meters.


Accessories pages 317-319.




3 YEARS WARRANTY |
 10 W/m |
 60 LED/m |
 CRI ≥80 |
 24 VDC |
 50mm |
 |
 LM-80 |
 2835


New

Fine 91

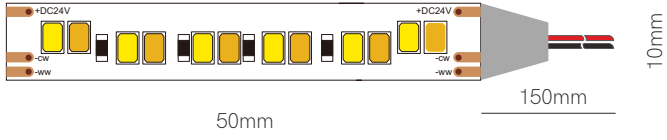

1,5mm |  IP20

Compatible profiles.



Technical Information

V / A / W | 24V / 1,00A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	91360	95 lm/w	2.280 lm/m	2.700-6.000K	IP20

*Available in reel of 5 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

24 W/m

216 LED/m




24 VDC

50mm






Fine 44

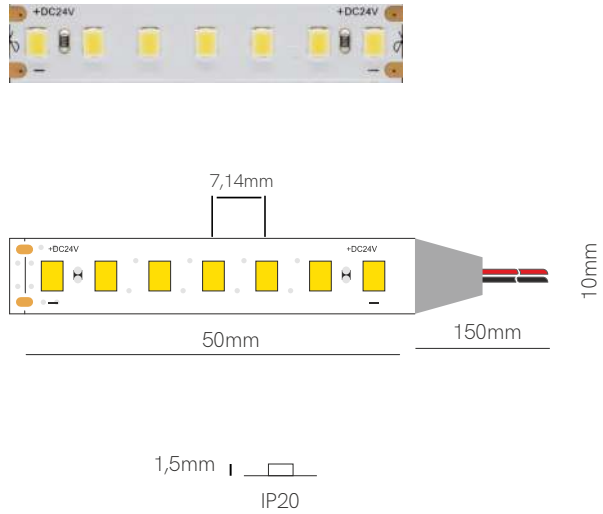

Compatible profiles.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

Code	Lumens/w	Lumens/m	CCT	IP
44370	85lm/w	1.224 lm/m	MEAT (3.700K)	IP20
44110	95 lm/w	1.368 lm/m	FISH (11.600K)	IP20
44500	90 lm/w	1.296 lm/m	FRUIT (5.000K)	IP20
44270	80 lm/w	1.152 lm/m	BREAD (2.700K)	IP20

Accessories




Joint
13,8x11,55x3,9mm
20220




Joint
13,55x11,67x4,7mm
20120




*Available in reel of 5 meters.

Accessories pages 317-319.




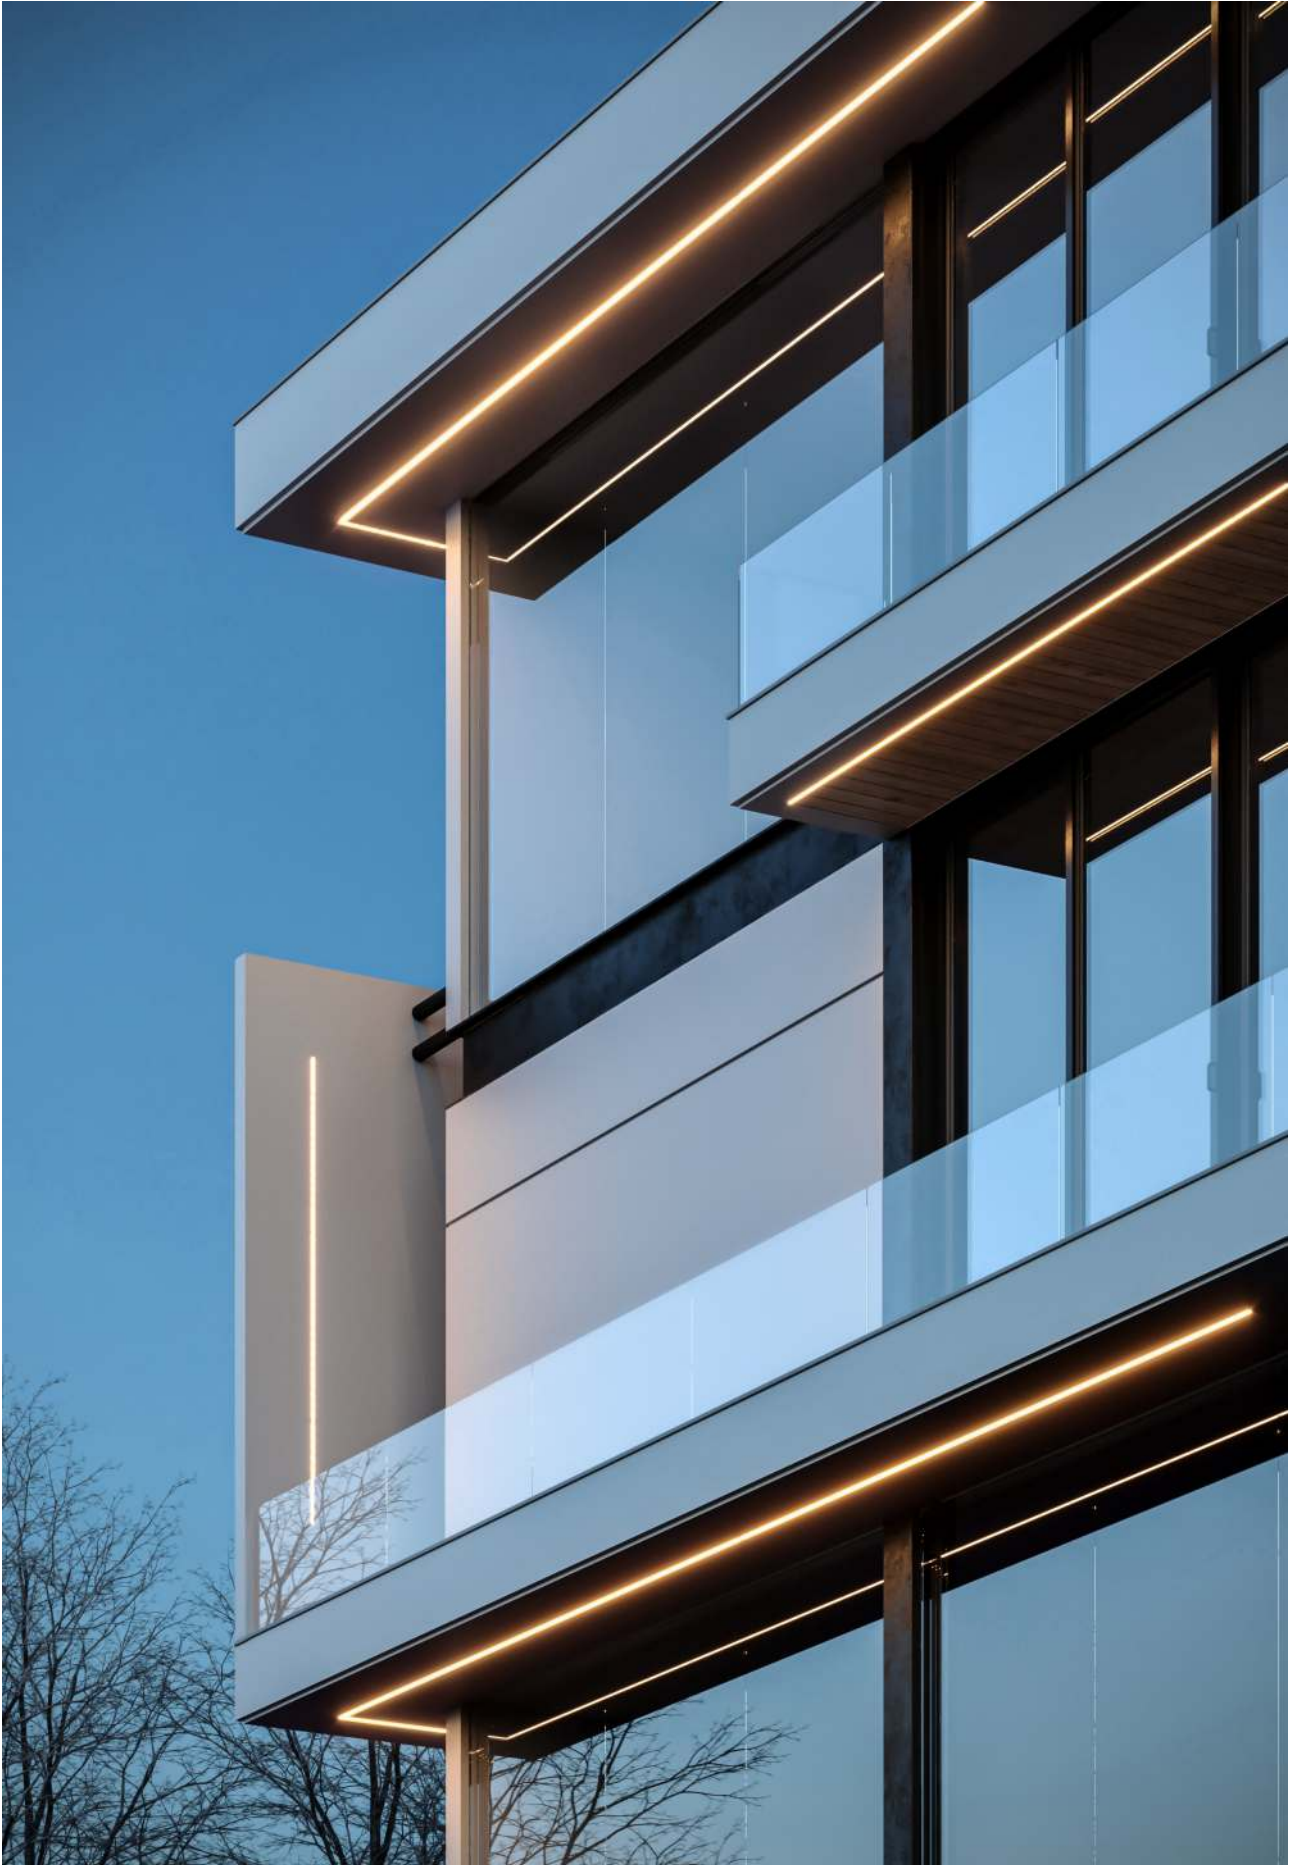

Fine 63

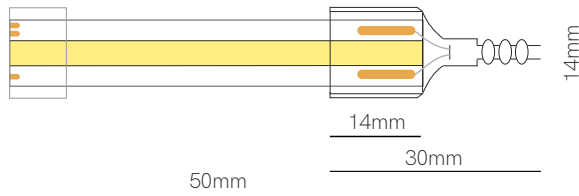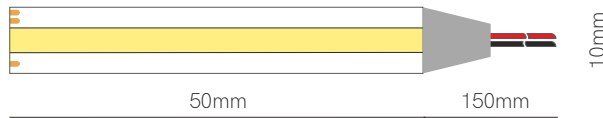

Compatible profiles.



Technical Information

V / A / W

24V / 0,79A / 19W/m

Code	Lumens/w	Lumens/m	CCT	IP
63360	80-95 lm/w	800-1.750 lm/m	2.700-6.500K	IP20
63367	80-95 lm/w	800-1.750 lm/m	2.700-6.500K	IP67

*Available in reel of 5 meters.

Accessories pages 317-319.



3 YEARS WARRANTY

19 W/m

640 LED/m

CRI ≥90





24 VDC


50mm



Fine 36

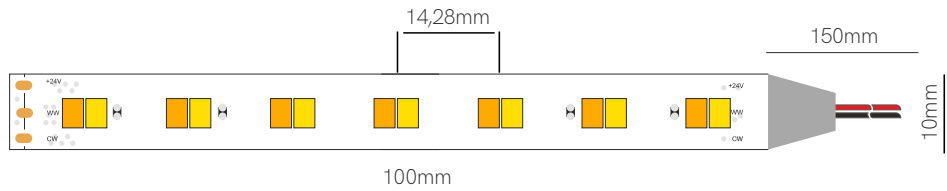

Compatible profiles.



Technical Information

V / A / W 24V / 0,5A / 12W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
36360	36360	90-110 lm/w	1.200 lm/m	2.700-5.000K	IP20

Accessories




Joint
13,57x11,63x3,5mm
20230



Joint
13,57x11,63x4,7mm
20130

*Available in reel of 5 meters.



Accessories pages 317-319.




5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 | III | 24 VDC | 100mm | 2835

New

Fine 81

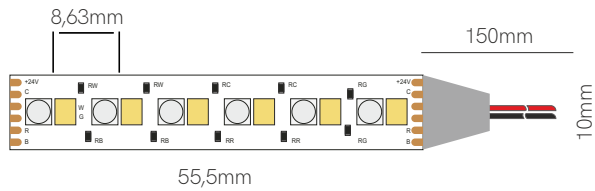

Compatible profiles.



Technical Information

V / A / W 24V / 0,94A / 22,5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
81470	100 lm/w	2.250 lm/m	RGB	2.700-6.000K	IP20

Accessories



Joint
20738




Connector Cable
20718




Joint
20728

*Available in reel of 5 meters.


Accessories pages 317-319.




5 YEARS WARRANTY | 22,5 W/m | 216 LED/m | CRI ≥80 | III | 24 VDC | 55mm | LM-80 | 2835

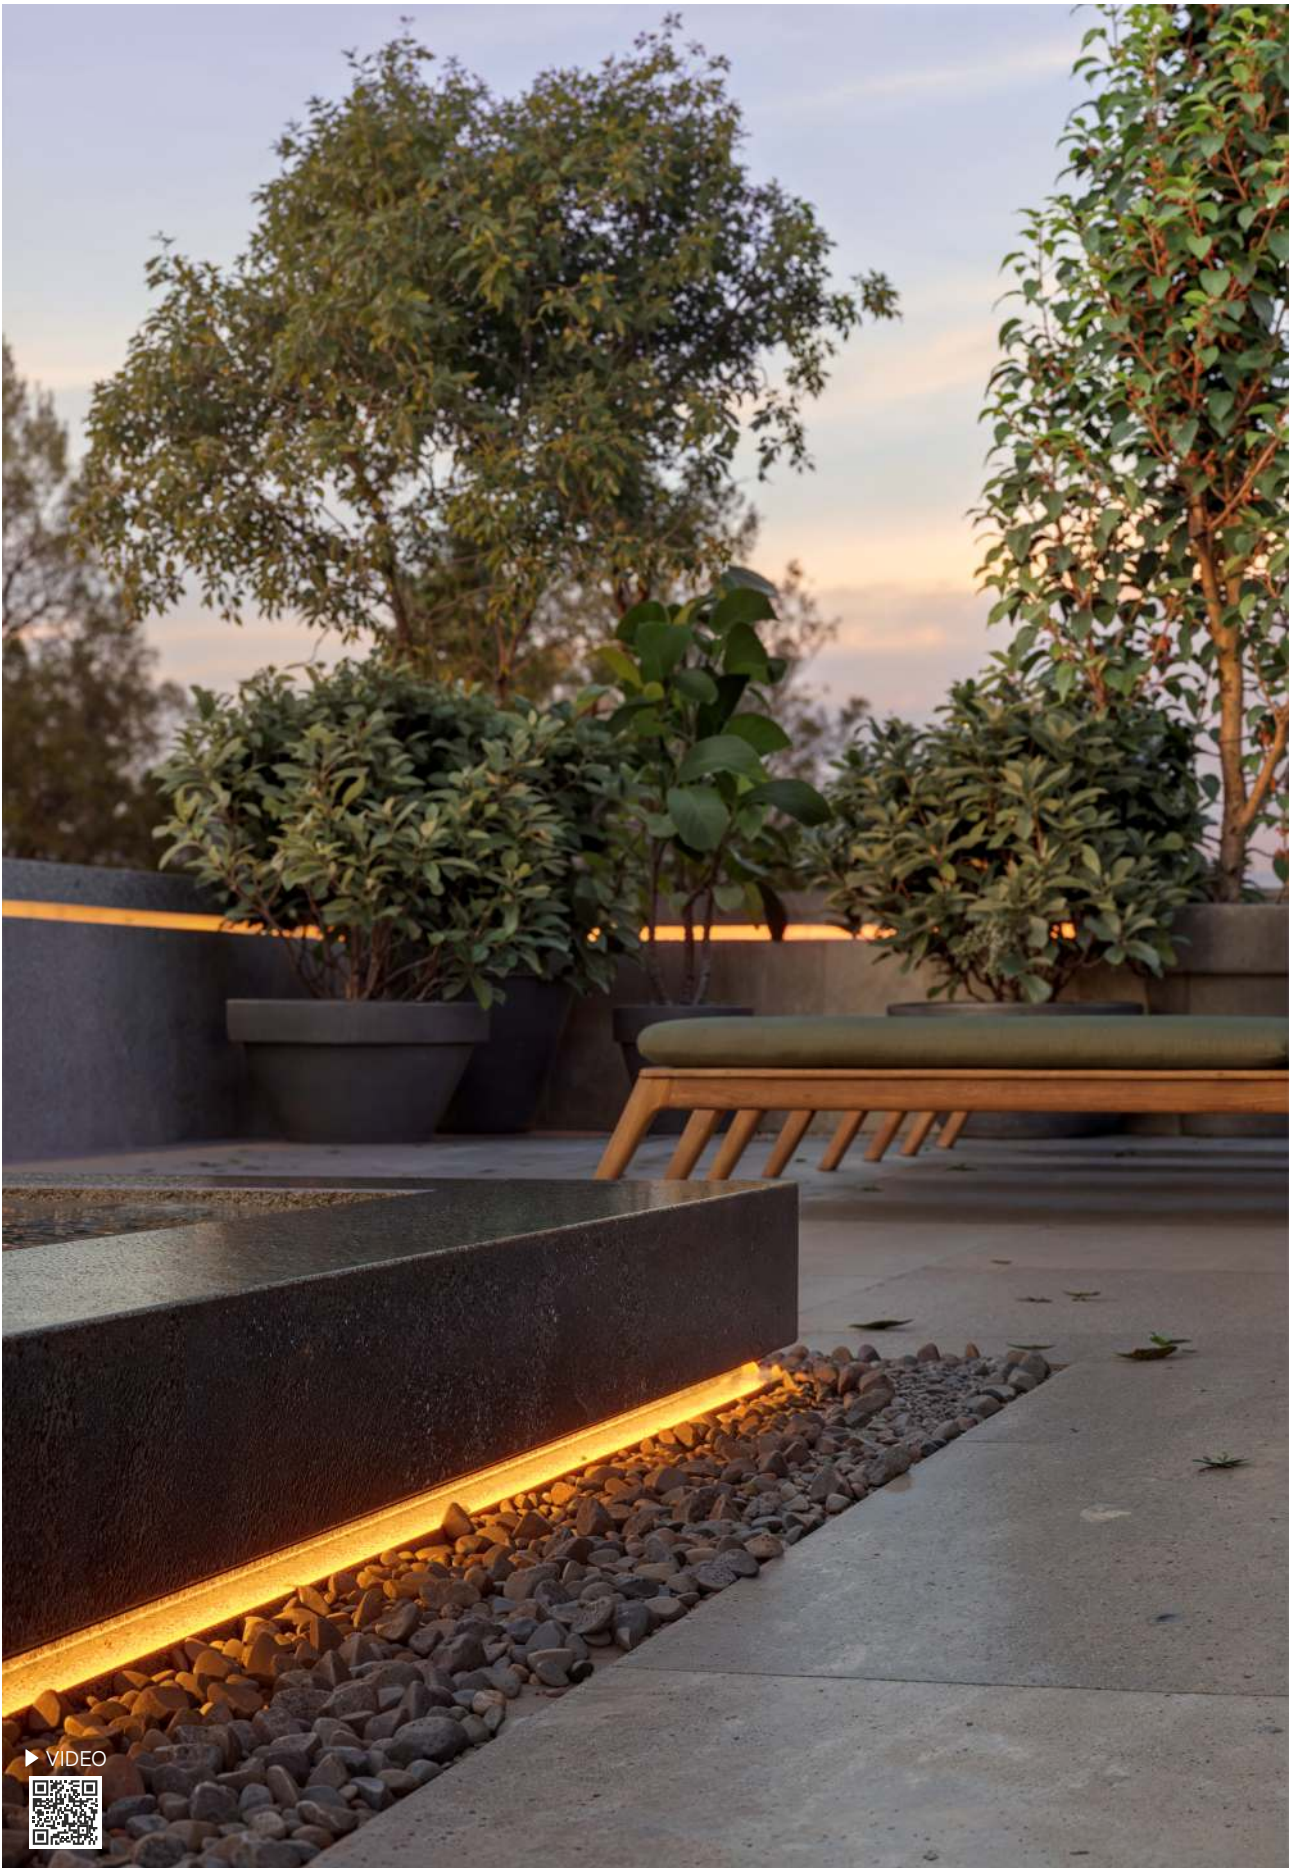

Fine 42

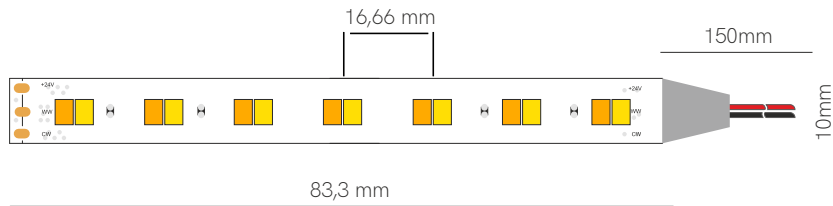

Compatible profiles.



Technical Information

V / A / W 24V / 0,8A / 19,2W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	42360	85-104 lm/w	1.728 lm/m	1.800-4.000K	IP20
	42365	85-104 lm/w	1.728 lm/m	1.800-4.000K	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,57x11,63x3,5mm
■ 20230



Joint
13,57x11,63x4,7mm
■ 20130




Joint
24,3x14,6x7,7mm
■ 20235



Joint
24,3x14,6x7,7mm
■ 20135

*Available in reel of 5 or 25 meters. Accessories pages 317-319.



5 YEARS WARRANTY

19,2 W/m

168 LED/m



24 VDC

83,3mm







▶ VIDEO



Fine 54

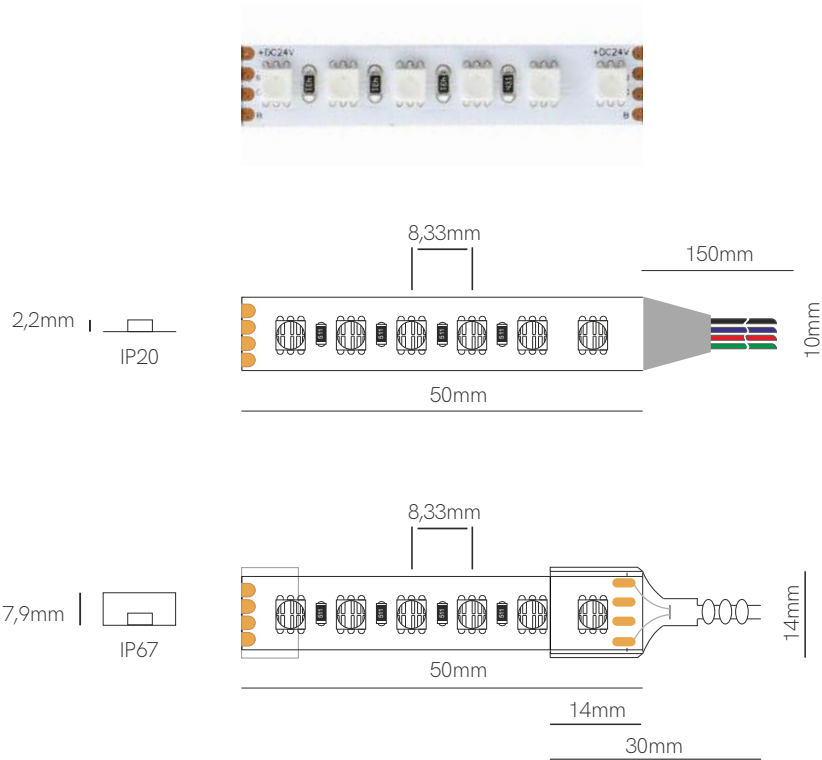

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14W/m
Red	33 lm/w 4,6W
Green	75 lm/w 4,6W
Blue	21 lm/w 4,6W


Code	Code	Lumens/w	Lumens/m	CCT	IP
	54460	50 lm/w	700 lm/m	RGB	IP20
	54467	45 lm/w	630 lm/m	RGB	IP67

Accessories


End Cap 32635	End Cap 32625	Joint 13,54x11,7x4,1mm 20240	Joint 13,56x13,46x4,7mm 20140

*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | | 50mm | 4040

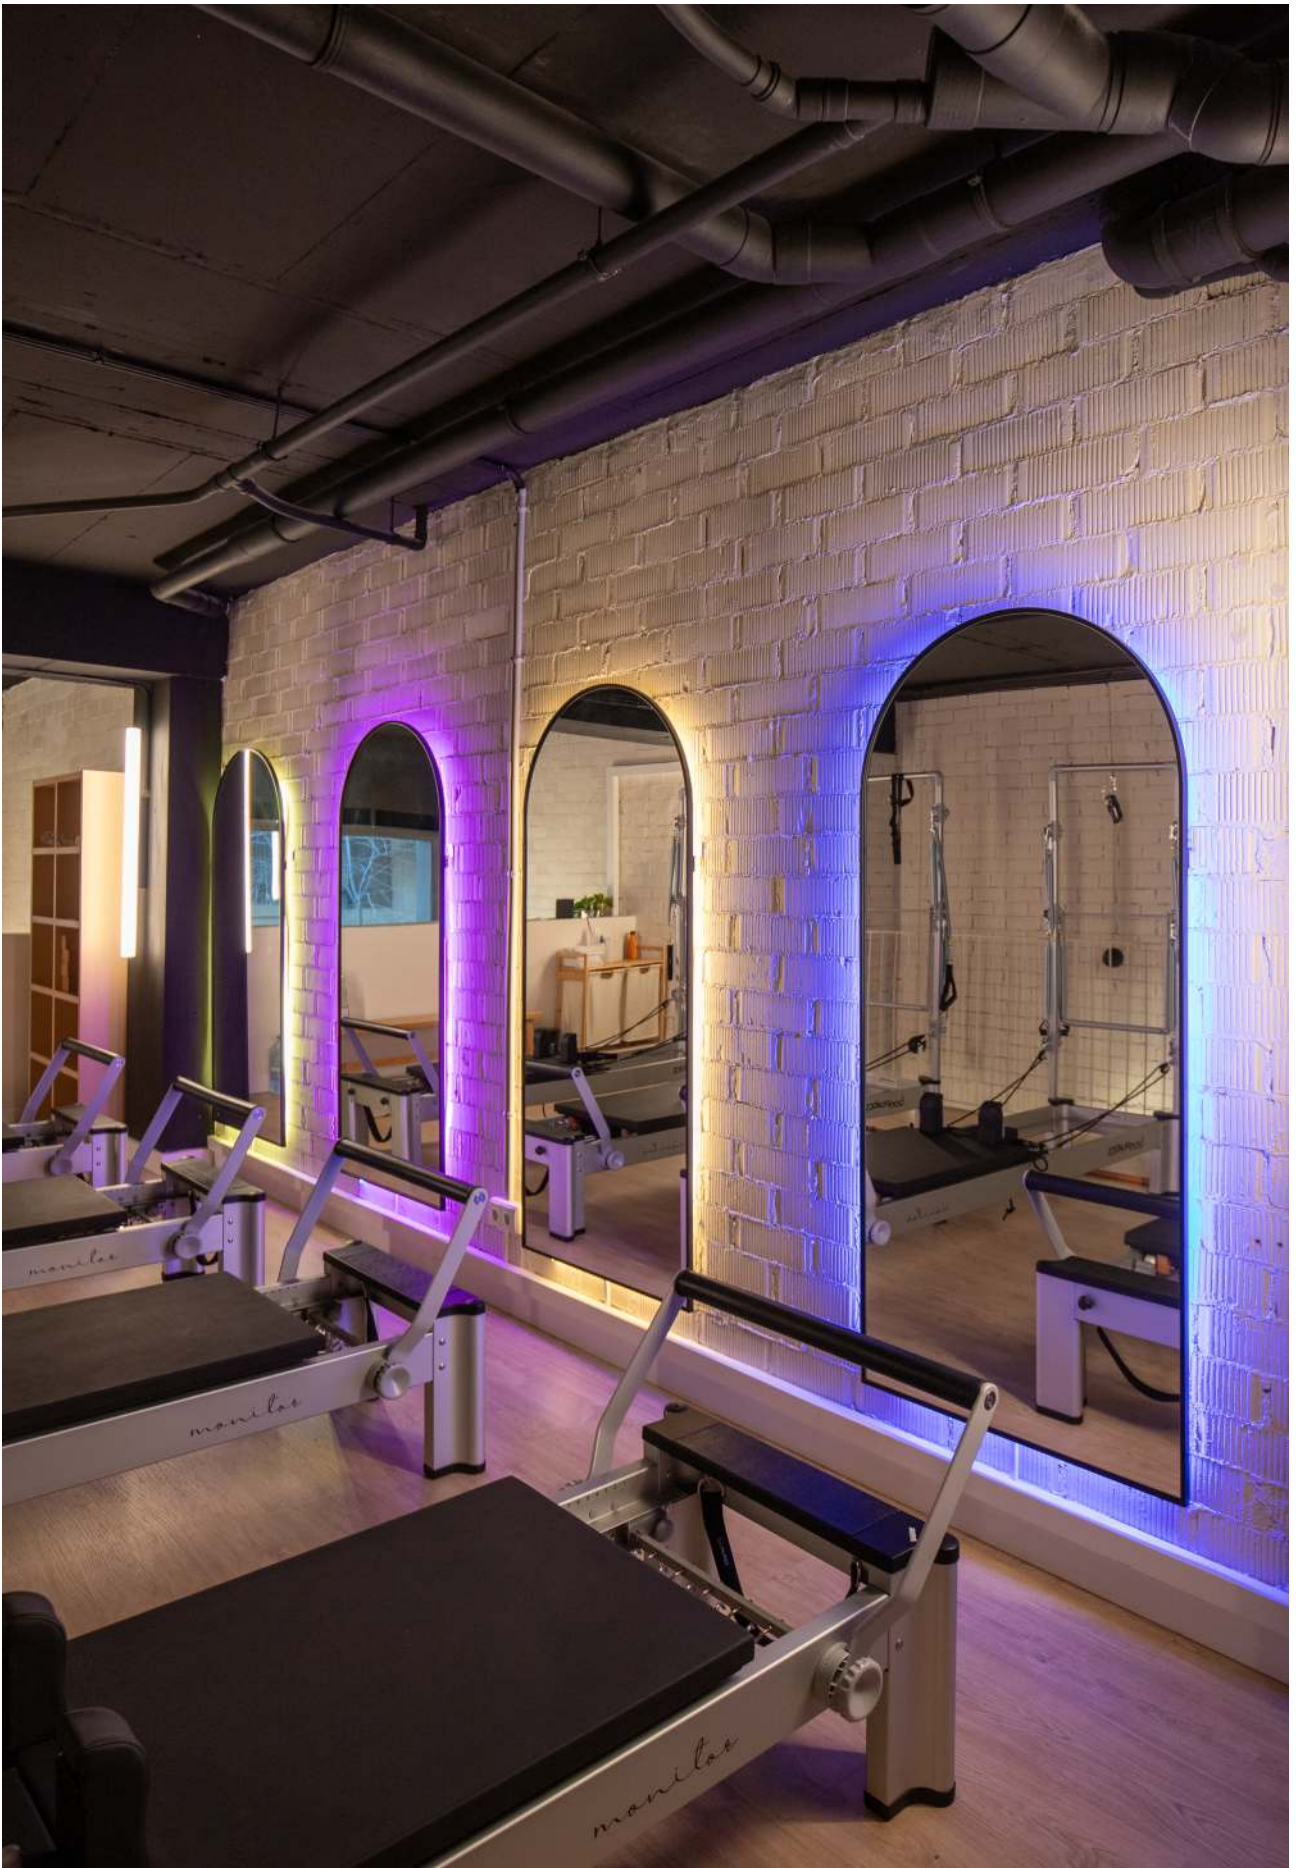


Connecta Fisioteràpia i Salut, Barcelona (Spain).

Fine 46

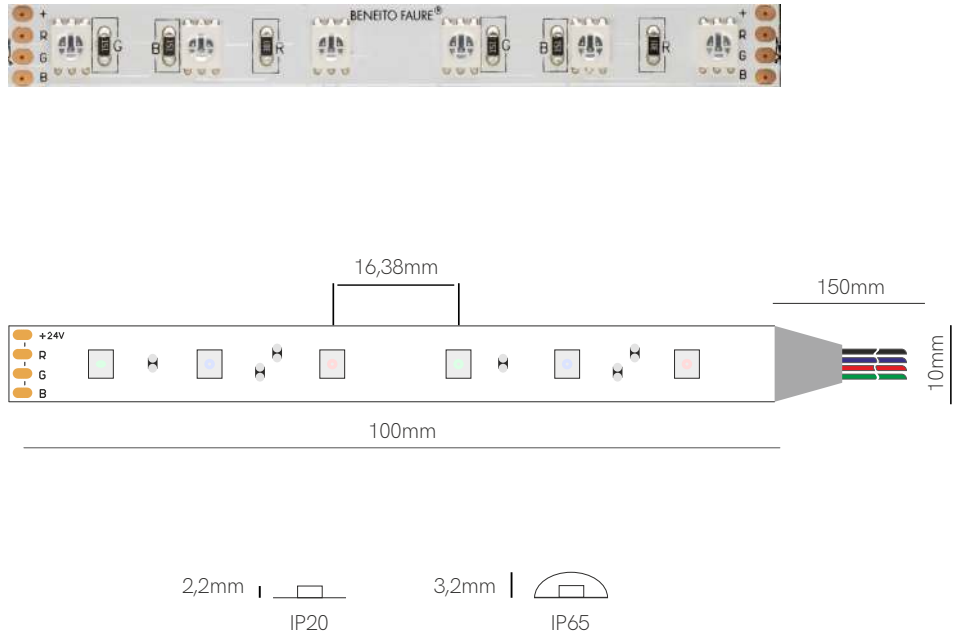

Compatible profiles.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m
Red	33 lm/w 4,8W
Green	75 lm/w 4,8W
Blue	21 lm/w 4,8W

Code	Code	Lumens/w	Lumens/m	CCT	IP
	46460	38 lm/w	547 lm/m	RGB	IP20
	46465	41 lm/w	590 lm/m	RGB	IP65

Accessories



End Cap
○ 20635



End Cap
○ 20625



Joint
13,54x11,7x4,1mm
□ 20240



Joint
13,56x13,46x4,7mm
□ 20140




Joint
24,3x14,6x7,68mm
□ 20245






Joint
24,3x14,6x7,68mm
□ 20145

*Available in reel of 5 or 25 meters. Accessories pages 317-319.




5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | 50mm | 5050

Fine 43

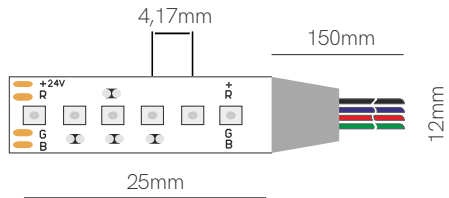

Compatible profiles.



Technical Information

V / A / W	24V / 0,8A / 19,2W/m
Red	23 lm/w 6,4W
Green	75 lm/w 6,4W
Blue	21 lm/w 6,4W

Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	43430	58 lm/w	1.728 lm/m	RGB	IP20



*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 19,2 W/m | 240 LED/m | 24 VDC | | 25mm | 3535

Fine 50

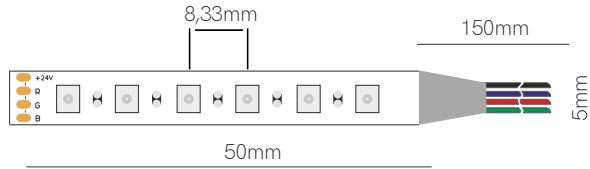

Compatible profiles.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m
Red	25 lm/w 3,2W
Green	78 lm/w 3,2W
Blue	13 lm/w 3,2W


Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	50460	58 lm/w	556 lm/m	RGB	IP20

*Available in reel of 5 meters.



Accessories pages 317-319.




5 YEARS WARRANTY | 9,6 W/m | 120 LED/m | 24 VDC | 50mm | 2835

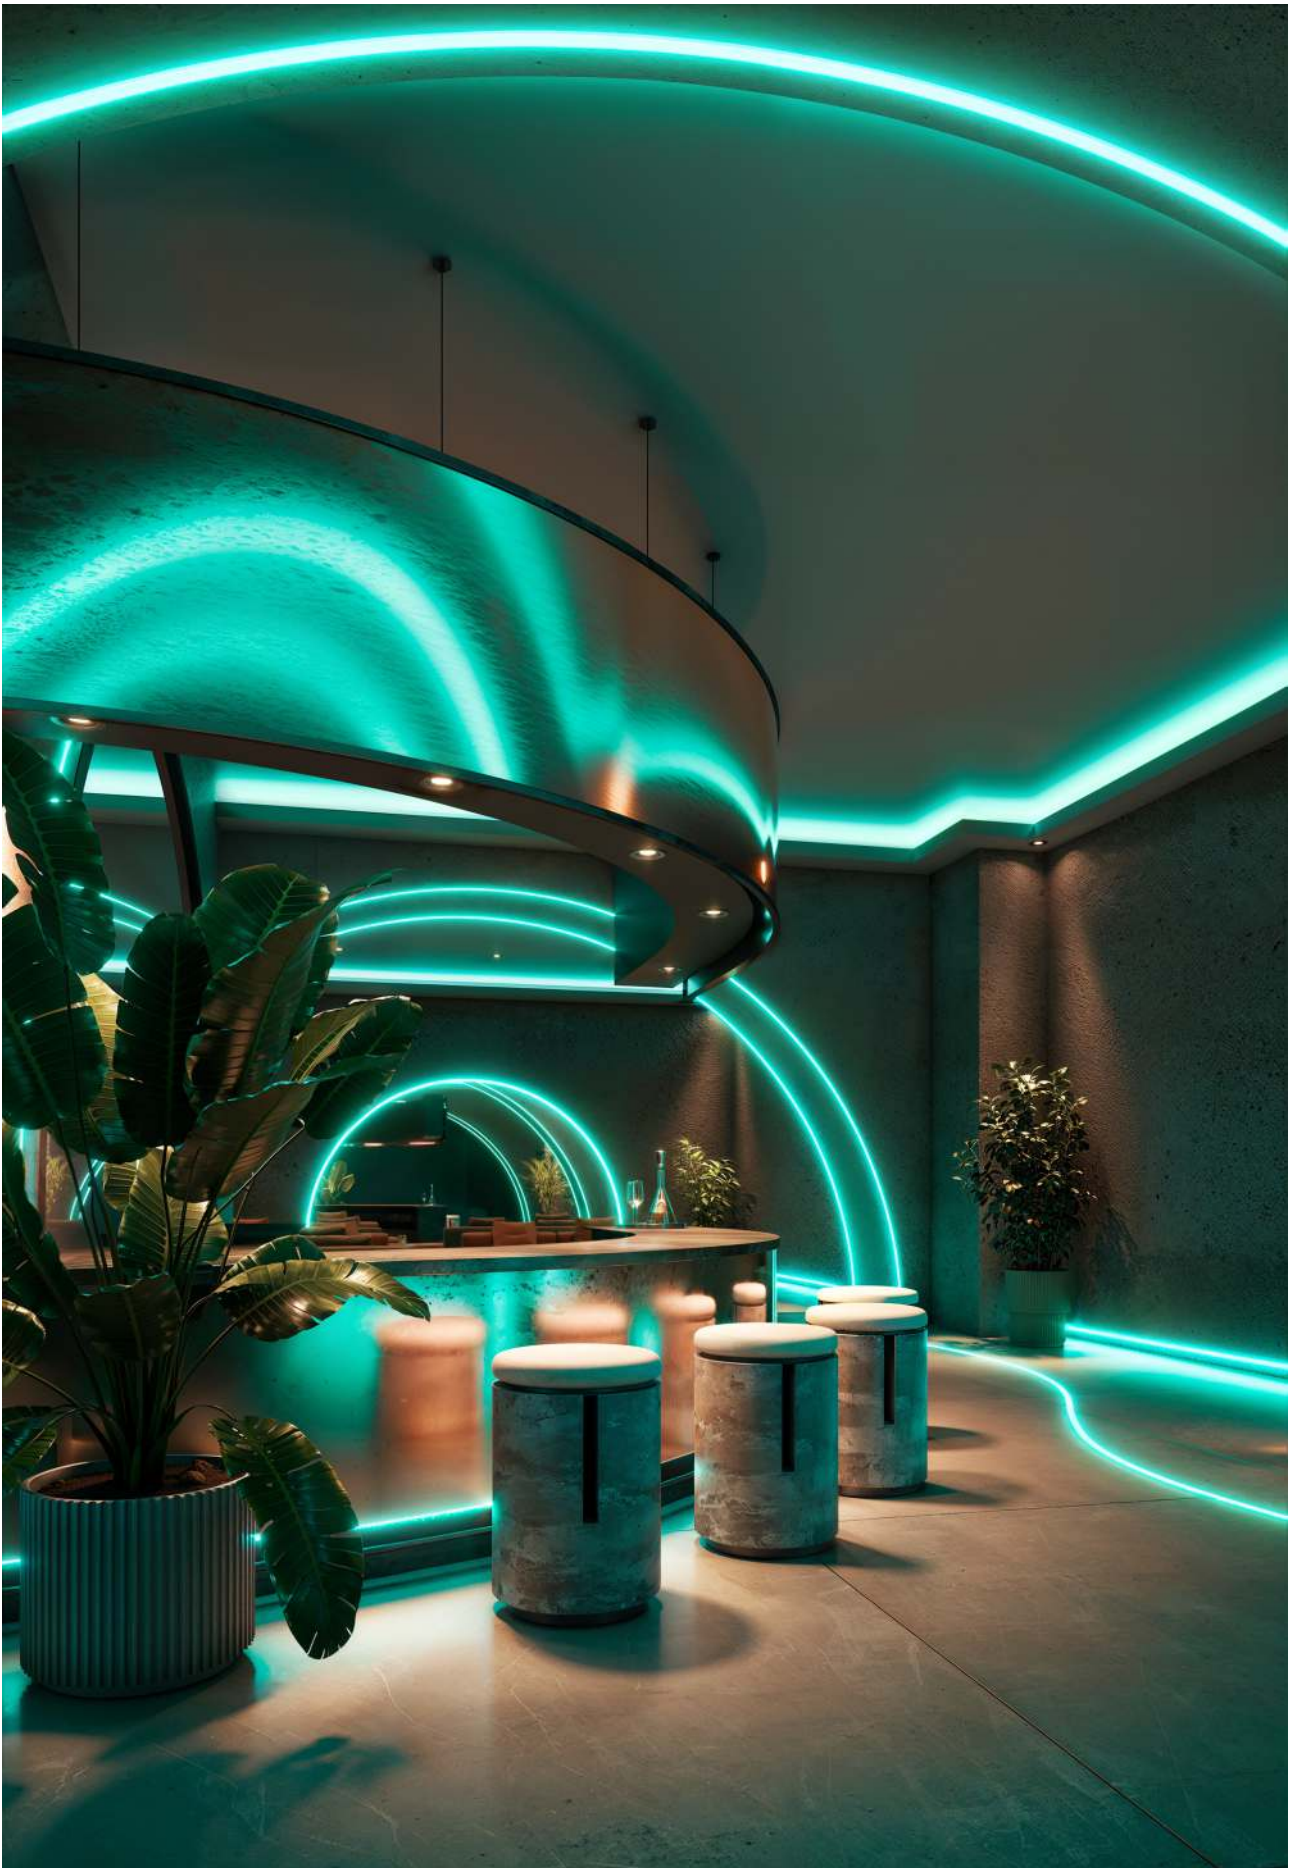

Fine 60

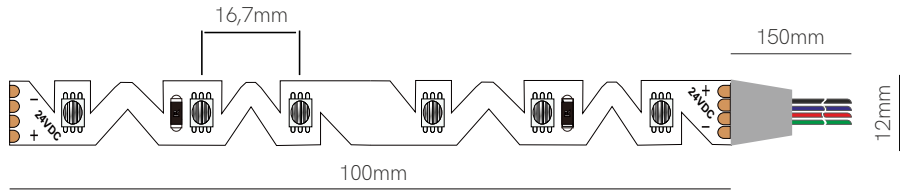

Compatible profiles.



Technical Information

V / A / W 24V / 0,33A / 8W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
60460	60460	81 lm/w	648 lm/m	RGB	IP20

Accessories




Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140


*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 8 W/m | 60 LED/m | 24 VDC | IP20 | 100mm | 5050

Fine 66 N

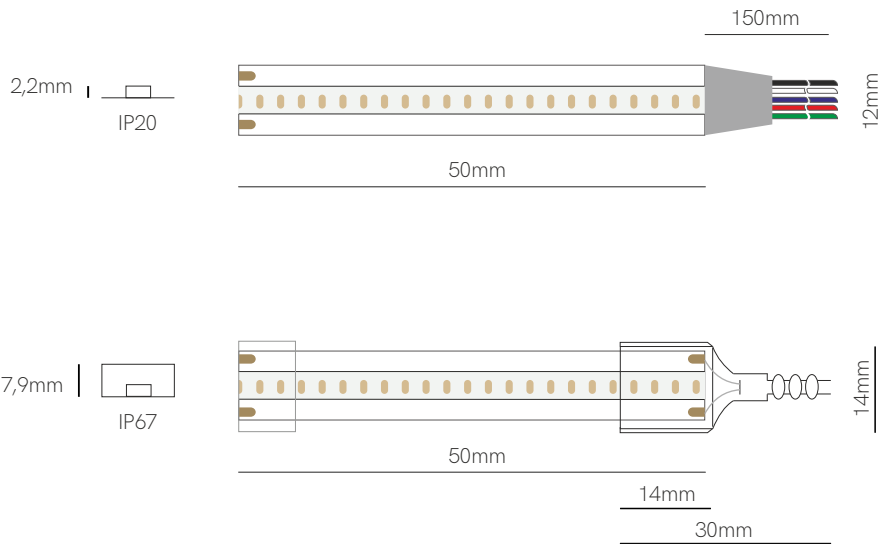

Compatible profiles.



Technical Information

V / A / W

24V / 1A / 24W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	66470/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP20
	66477/N	167 lm/w	996 lm/m	RGB-W 2.700K	IP67

Accessories



End Cap
32635



End Cap
32625




Joint
20066



Joint
20266

*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 24 W/m | 560 LED/m | 24 VDC




50mm



Fine 71

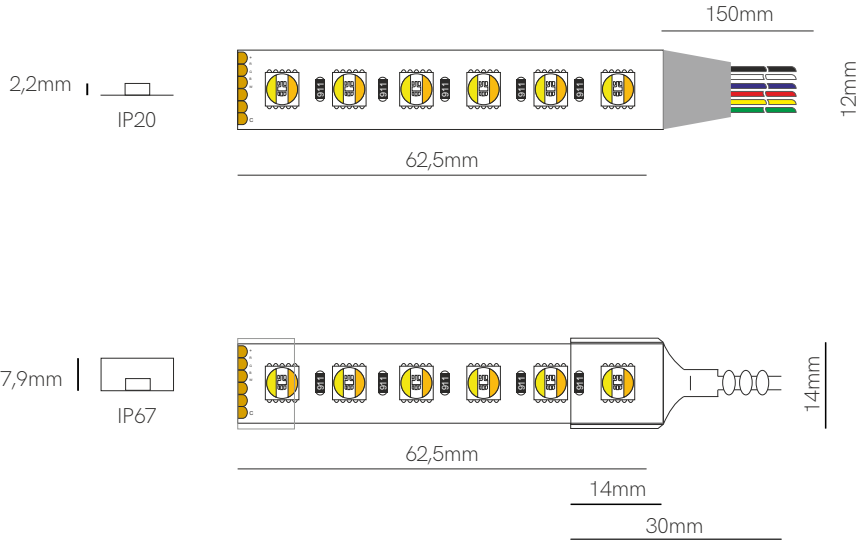

Compatible profiles.



Technical Information

V / A / W 24V / 0,875A / 21W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
71470	71470	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP20
71477	71477	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP67

Accessories



End Cap 32635 End Cap 32625


*Available in reel of 5 meters.

Accessories pages 317-319.




5 YEARS WARRANTY | 21 W/m | 96 LED/m | 24 VDC | 62,5mm | 5050

Fine 47

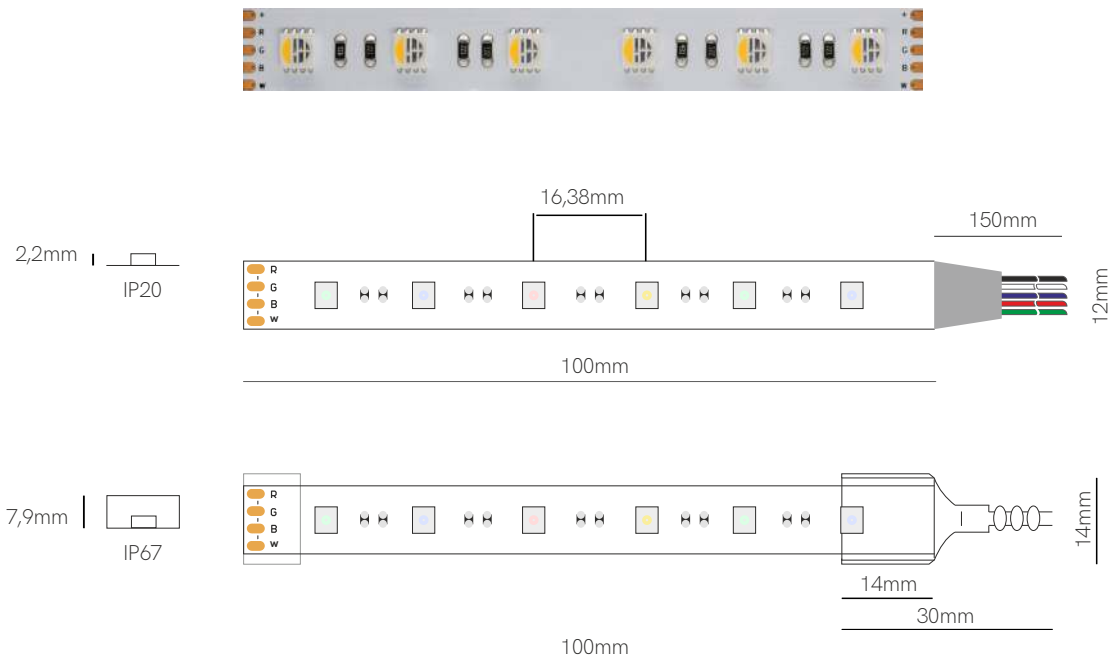

Compatible profiles.



Technical Information

V / A / W

24V / 0,6A / 14,4W/m

Code

Code	Lumens/w	Lumens/m	CCT	IP
47430	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP20
47440	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP20
47437	18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP67
47447	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,5x13,73x4,2mm
20150



Joint
13,5x13,55x4,8mm
20250

*Available in reel of 5 or 25 meters.

Accessories pages 317-319.



5 YEARS WARRANTY

14,4 W/m

60 LED/m


24 VDC




100mm



Fine 45

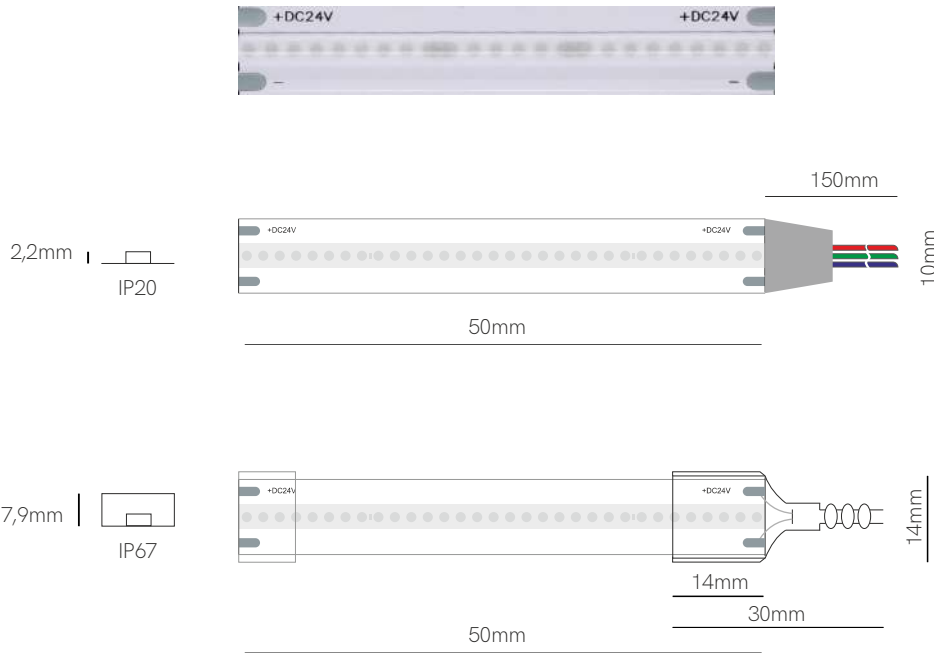

Compatible profiles.




Technical Information

V / A / W 24V / 0,41A / 10W/m



Code	Lumens/w	Lumens/m	CCT	IP
45220	15	150	RED	IP20
45310	91	910	GREEN	IP20
45520	13	130	BLUE	IP20
45227	15	150	RED	IP67
45317	91	910	GREEN	IP67
45527	13	130	BLUE	IP67

Accessories

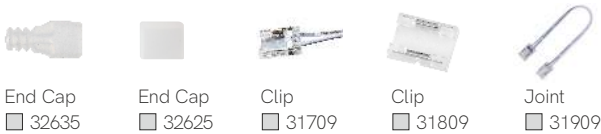

*Available in reel of 10 meters.

Accessories pages 317-319.



Running led strip



▶ VIDEO



Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip.

Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.



We do have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by Beneito & Faure, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.

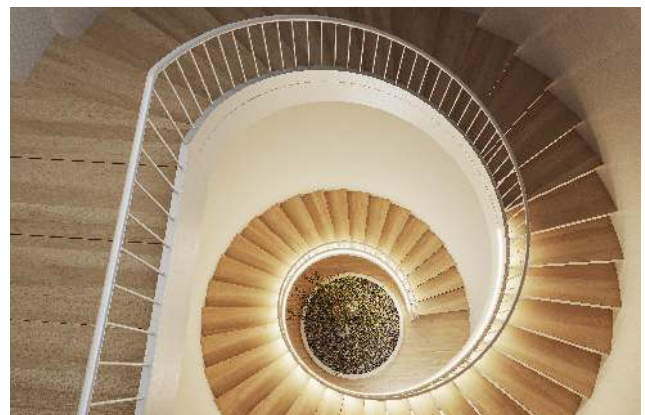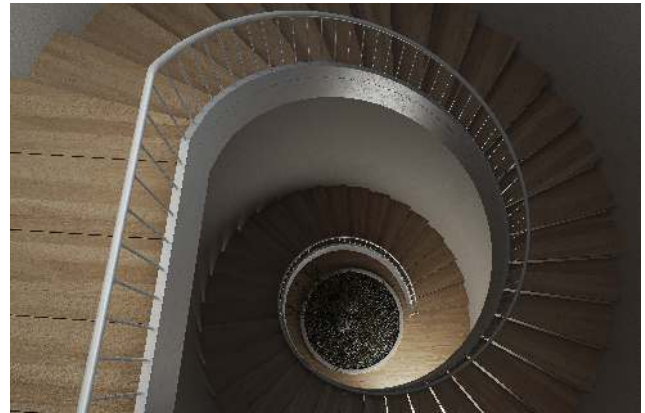

Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio.

Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por Beneito & Faure, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.

Fine running

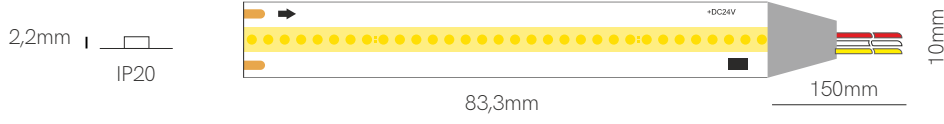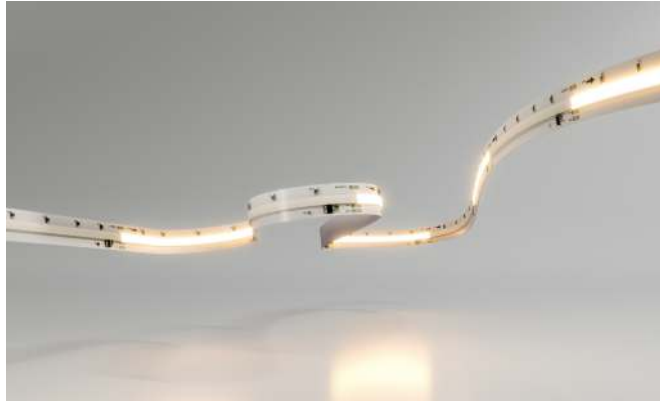

Compatible profiles.





Technical Information


V / A / W	24V / 0,5A / 12W/m
IC	WS2811 (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
	SP1270 New	75 lm/w	900 lm/m	2700K	IP20
	SP1300	79 lm/w	950 lm/m	3000K	IP20
	SP1400	87 lm/w	1.050 lm/m	4000K	IP20


*Available in reel of 5 meters. Accessories pages 317-319.

Control



Code	Version	Power Max	Pixels Max	VDC IN
 SP-9812	Controller	-	-	24 VDC
 SP-6329	Running Touch Controller	8A	1.024	24 VDC




3 YEARS WARRANTY |
 12 W/m |
 360 LED/m |
 CRI ≥90 |
 III |
 24 VDC |
 83,3mm  |
 SPI |
  COB

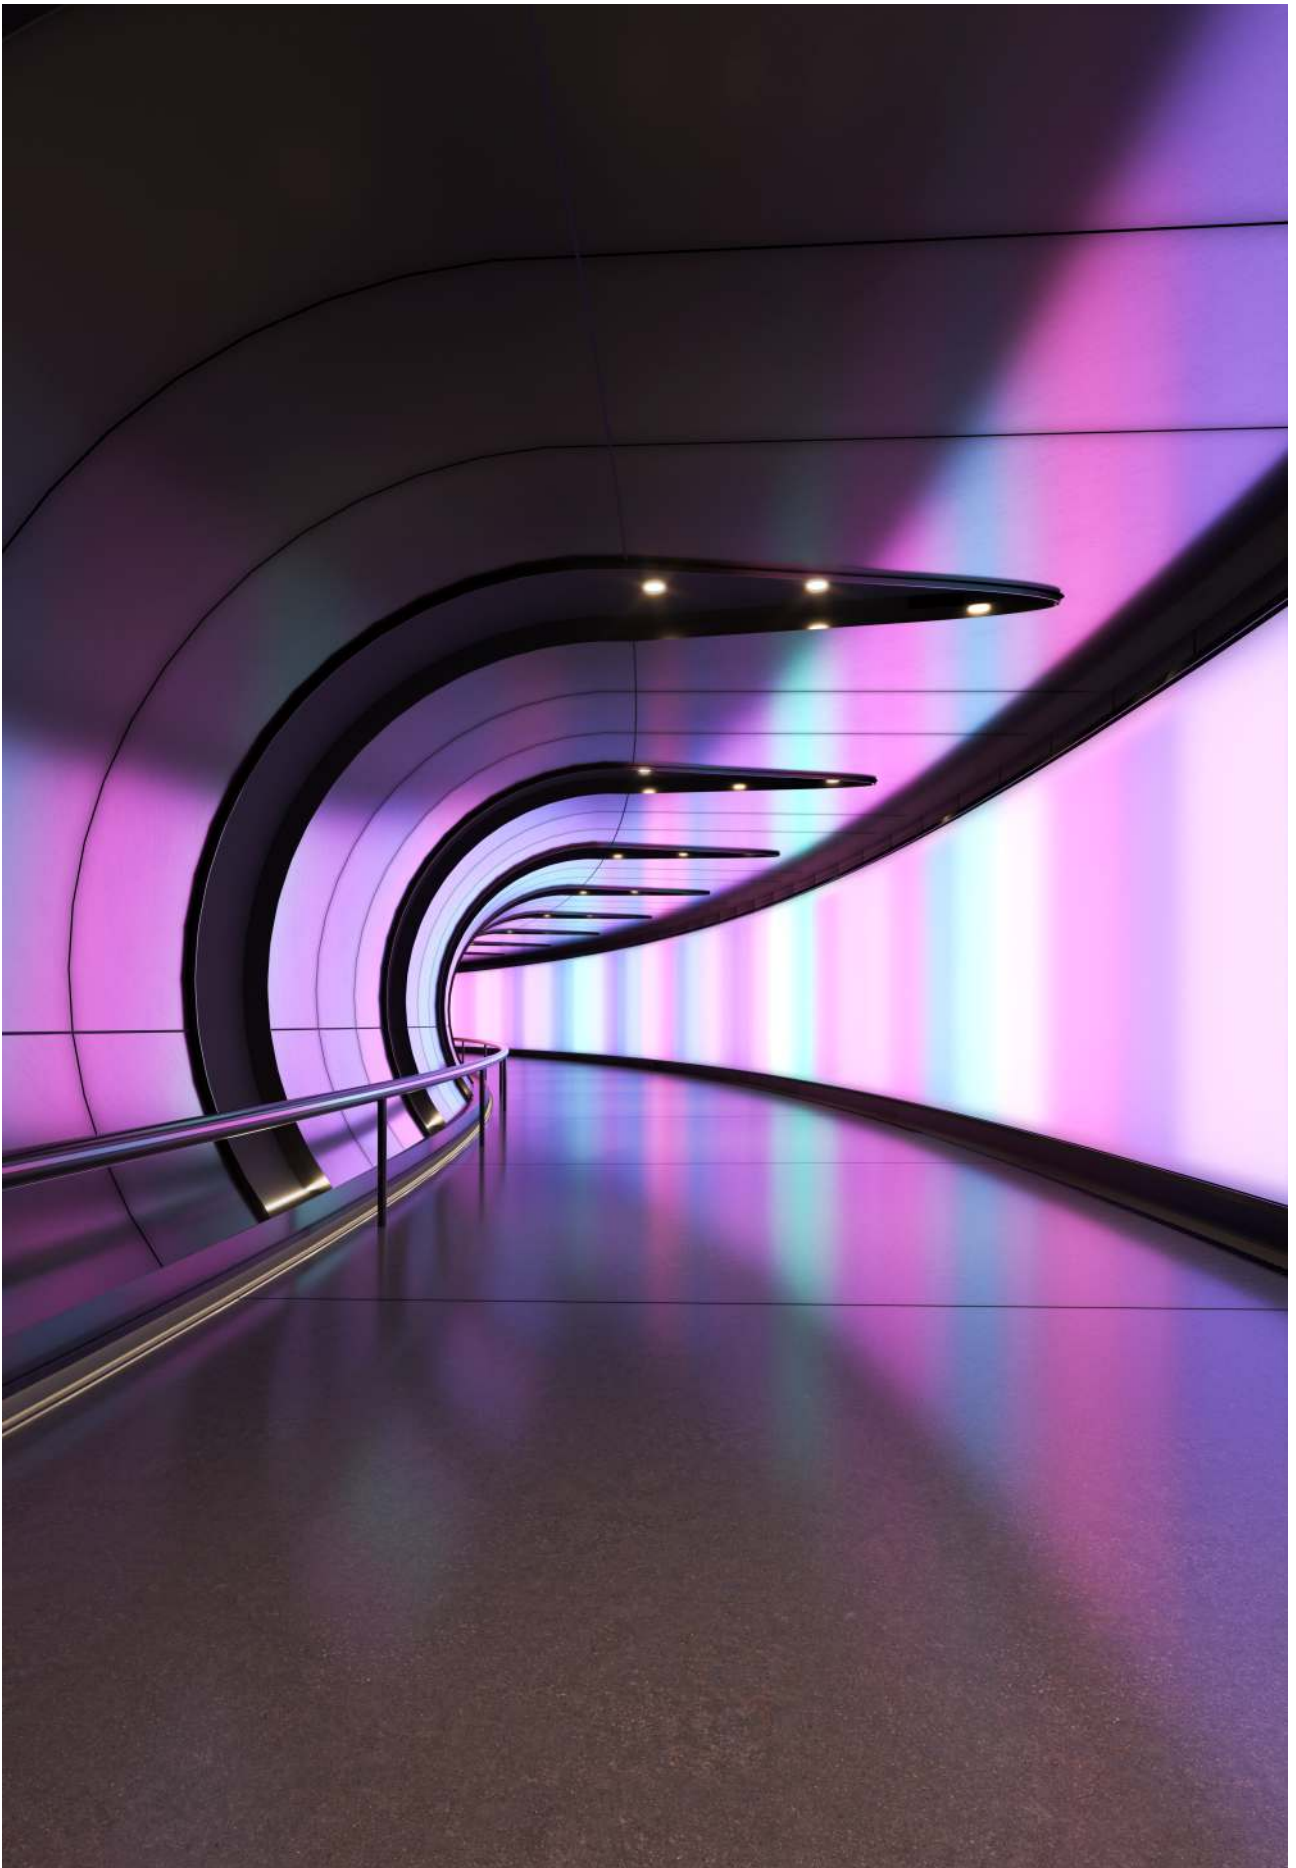

Fine SPI-2

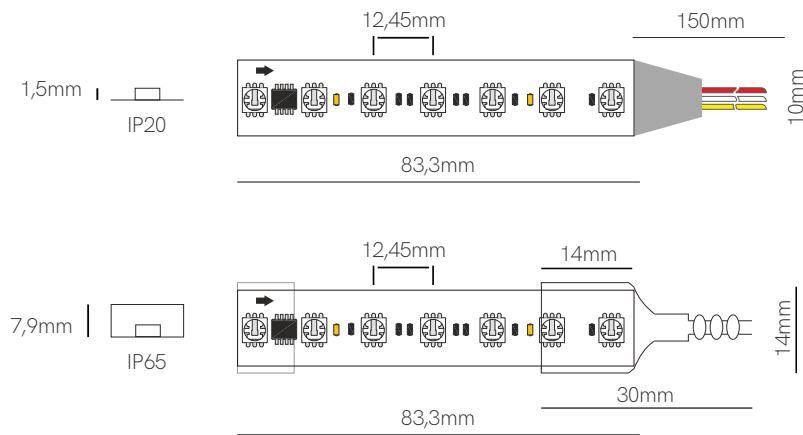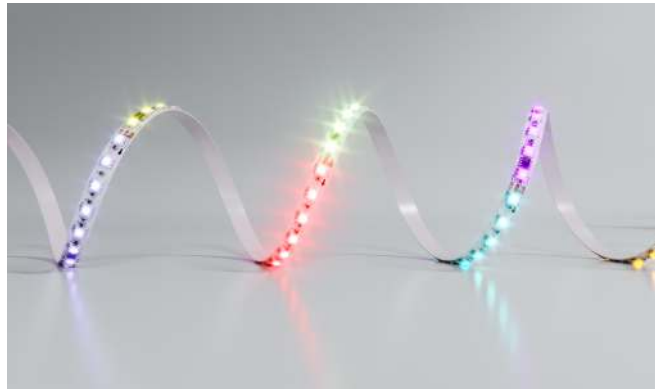

Compatible profiles.



Technical Information

V / A / W	24V / 0,58A / 14W/m
IC	SM16703PB (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
SP2430	37 lm/w	515 lm/m	RGB	IP20	
SP2435	37 lm/w	515 lm/m	RGB	IP65	

Accessories



End Cap 32635 End Cap 32625

*Available in reel of 5 meters.

Control accessories pages 323/338. Accessories pages 317-319.



3 YEARS WARRANTY

14 W/m

84 LED/m



24 VDC

83,3mm





SPI





Fine SPI-3

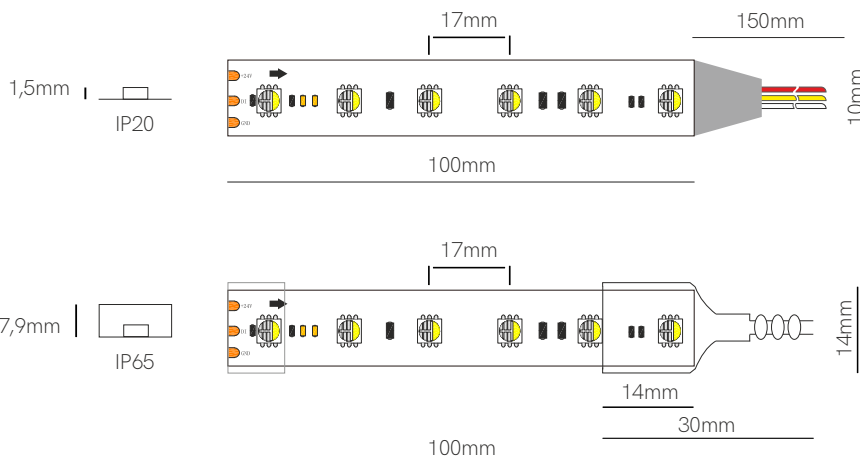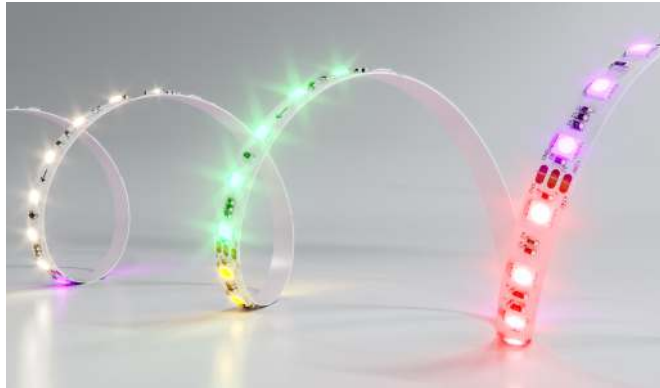

Compatible profiles.



Technical Information

V / A / W	24V / 0,45A / 11W/m
IC	SK6812 12MA (10px/m)

Code	Lumens/w	Lumens/m	CCT	IP
SP3470	51 lm/w	561 lm/m	RGB-W 3.000K	IP20
SP3475	51 lm/w	561 lm/m	RGB-W 3.000K	IP65

Accessories

End Cap 32635 End Cap 32625



*Available in reel of 5 meters.

Control accessories pages 323/338. Accessories pages 317-319.



3 YEARS WARRANTY | 11 W/m | 60 LED/m | III | 24 VDC | 100mm | SPI | 5050

Fine SPI-4

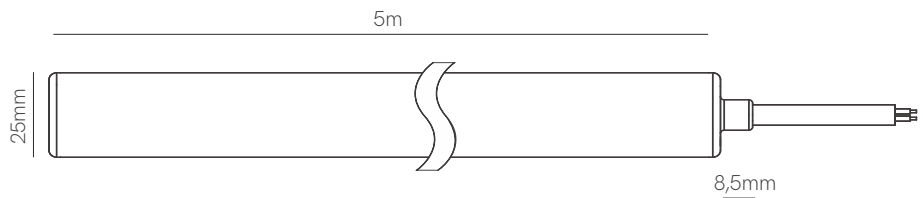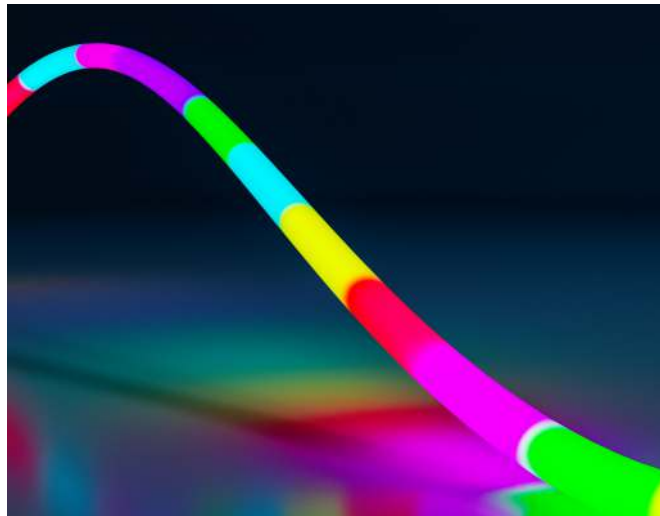

Technical Information

V / A / W	24V / 0,83A / 20W/m
IC	SK6812 12MA (12px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
SP4437		12,5 lm/w	250 lm/m	RGB	IP67

Accessories

End Cap ● 25627	End Cap ○ 25657-1 ● 25657-2 ○ 25657	Initial roof Cap ○ 25997-1 ● 25997-2 ○ 25997	Clip ○ 25530	Initial Cap ○ 25667-1 ● 25667-2 ○ 25667	Initial Cap ○ 25637	Tube ○ 25450	Joint with base ○ 25227-1 ● 25227-2 ○ 25227	Suspension kit ○ 25887


*Available in reel of 5 meters. Control accessories pages 323/338. Accessories pages 317-319.




5 YEARS WARRANTY | 20 W/m | 168 LED/m | 24 VDC | 83,3mm | | | | | SPI | 5050

New


Fine SPI-5

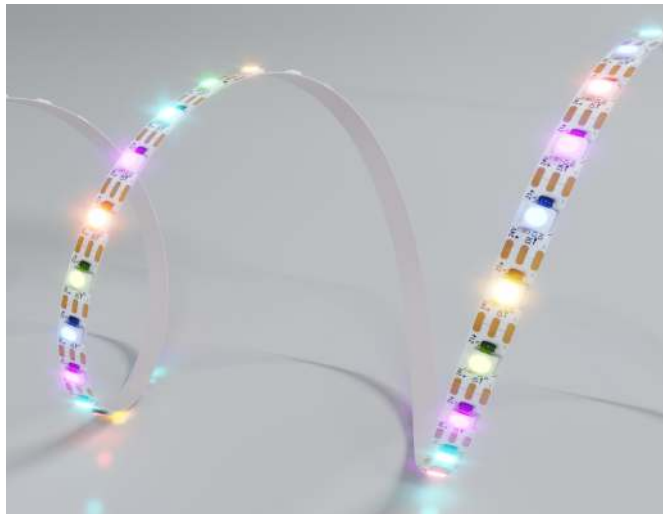

LED STRIPS

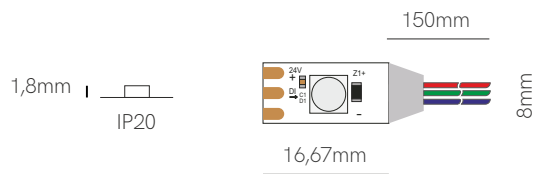

Compatible profiles.



Technical Information

V / A / W	24V / 0,50A / 12W/m
IC	WS2815P (60px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP5470	48 lm/w	576 lm/m	RGB	IP20

*Available in reel of 5 meters.

Control accessories pages 323/338. Accessories pages 317-319.



5 YEARS WARRANTY

12 W/m

60 LED/m



24 VDC

16,67mm



SPI

LM-80







▶ VIDEO



Fine DMX-4

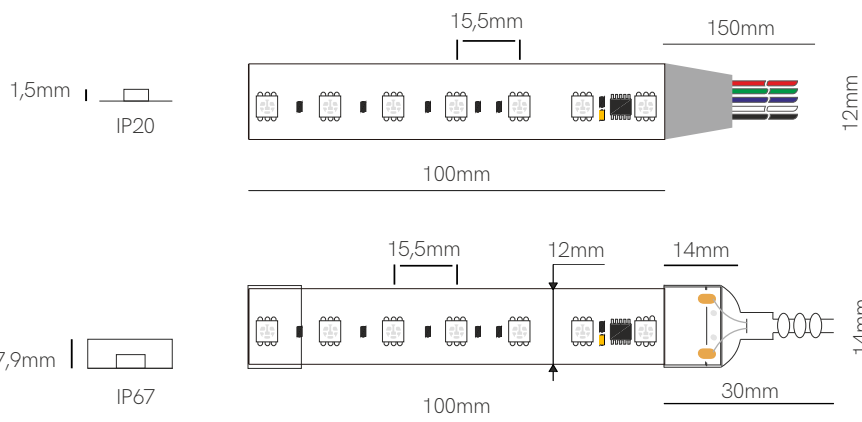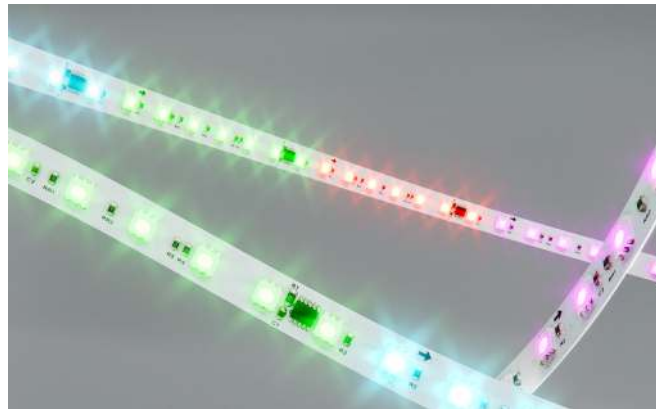

Compatible profiles.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	SM18512PS (10px/m)

Code	Lumen/w	Lumen/m	CCT	IP
DM4430	42 lm/w	503 lm/m	RGB	IP20
DM4437	42 lm/w	503 lm/m	RGB	IP67

Accessories

End Cap
32635

End Cap
32625

*Available in reel of 5 meters.


Control accessories page 338. Accessories pages 317-319.



3 YEARS WARRANTY | 12 W/m | 70 LED/m | III | 24 VDC | 100mm | ✂ | DMX | 5050



Fine DMX-5

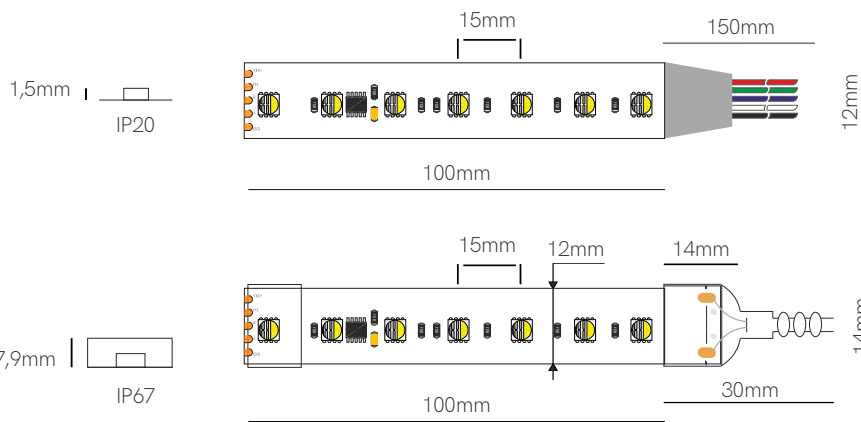

Compatible profiles.



Technical Information

V / A / W	24V / 0,7A / 17W/m
IC	SM18512PS (10px/m)


Code	Lumen/w	Lumen/m	CCT	IP
DM5470	50 lm/w	861 lm/m	RGB-W 3.000K	IP20
DM5477	50 lm/w	861 lm/m	RGB-W 3.000K	IP67

Accessories

End Cap 32635 End Cap 32625

*Available in reel of 5 meters.

Control accessories page 338. Accessories pages 317-319.



3 YEARS WARRANTY | 17 W/m | 70 LED/m | III | 24 VDC | 100mm | ✂ | DMX | 5050

NEON IP67 LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.



Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.


Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.





FITSEVENELEVEN®, Club Frankfurt Airport.

Fine 25

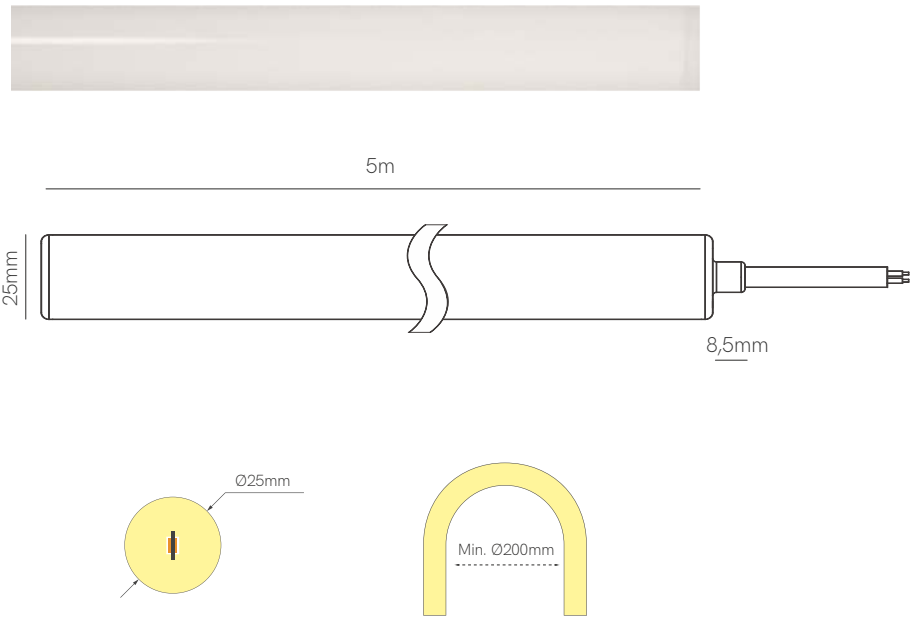

Technical Information

V / A / W 24V / 0,83A / 20W/m


Code	Code	Lumens/w	Lumens/m	CCT	IP
	25247	60 lm/w	1.200 lm/m	2400K	IP67
	25277	65 lm/w	1.300 lm/m	2700K	IP67
	25307	69 lm/w	1.380 lm/m	3000K	IP67
	25407	73 lm/w	1.460 lm/m	4000K	IP67
	25367	55 lm/w	1.100 lm/m	2700K-4200K	IP67
	25467	41 lm/w	820 lm/m	RGB	IP67

*Available in reels of 1,5 m, 3 m and 5 meters.

Accessories






Accessories pages 317-319.





Fine 34




Technical Information

V / A / W 24V / 0,21A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	34277	28 lm/w	140 lm/m	2700K	IP67
	34307	30 lm/w	150 lm/m	3000K	IP67
	34407	32 lm/w	160 lm/m	4000K	IP67

Accessories



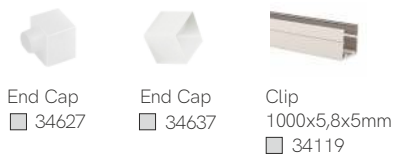


*Available in reel of 10 meters.
Accessories pages 317-319.





Fine 77

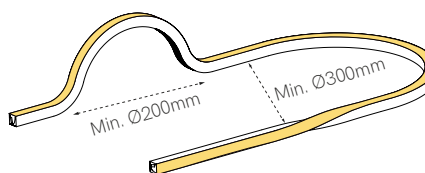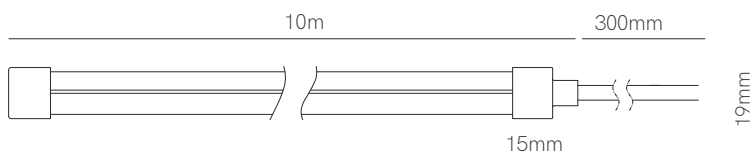

Technical Information

V / A / W 24V / 0,33A / 12W/m / 8W/m

Code	Lumens/w	Lumens/m	CCT	IP
77277	50 lm/w	600 lm/m	2700K	IP67
77307	51 lm/w	612 lm/m	3000K	IP67
77407	55 lm/w	660 lm/m	4000K	IP67
77437	26 lm/w	208 lm/m	RGB	IP67


Accessories

End Cap 77627	End Cap 77967	End Cap 77997	End Cap 77637	Clip 30x18x18mm 77580	Clip 1000x18x18mm 77819	Clip 1000x18x18mm 77953

*Available in reel of 10 meters. Accessories pages 317-319.



Fine 70

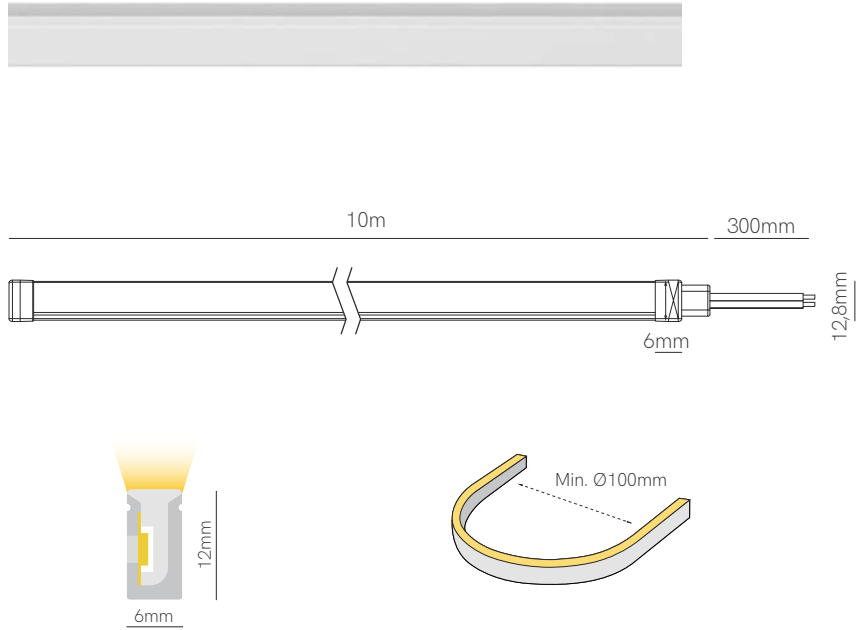

Technical Information

V / A / W 24V / 0,20A / 5W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	70277	31 lm/w	155 lm/m	2700K	IP67
	70307	35 lm/w	175 lm/m	3000K	IP67
	70407	37 lm/w	185 lm/m	4000K	IP67
	70437	15 lm/w	75 lm/m	RGB	IP67

Accessories






*Available in reel of 10 meters.

Accessories pages 317-319.



Fine 72

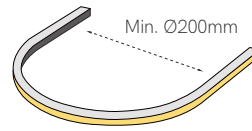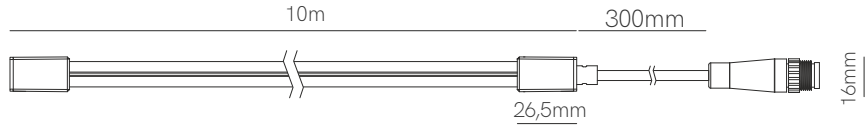

Technical Information


V / A / W 24V / 0,41A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	72277	59 lm/w	590 lm/m	2700K	IP67
	72307	62 lm/w	620 lm/m	3000K	IP67
	72407	65 lm/w	650 lm/m	4000K	IP67
	72437	26 lm/w	260 lm/m	RGB	IP67



Accessories

End Cap	End Cap	End Cap	End Cap	Clip	Clip	Clip	Extension cable
72967-L2	72967-2	72627-2	72637	20,2x14x14mm	1000x14x14mm	1000x14x18mm	77946 (Mono)
72967-L4	72967-4	72627-4		77530	77519	77350	77920 (RGB)

*Available in reel of 10 meters. Accessories pages 317-319.

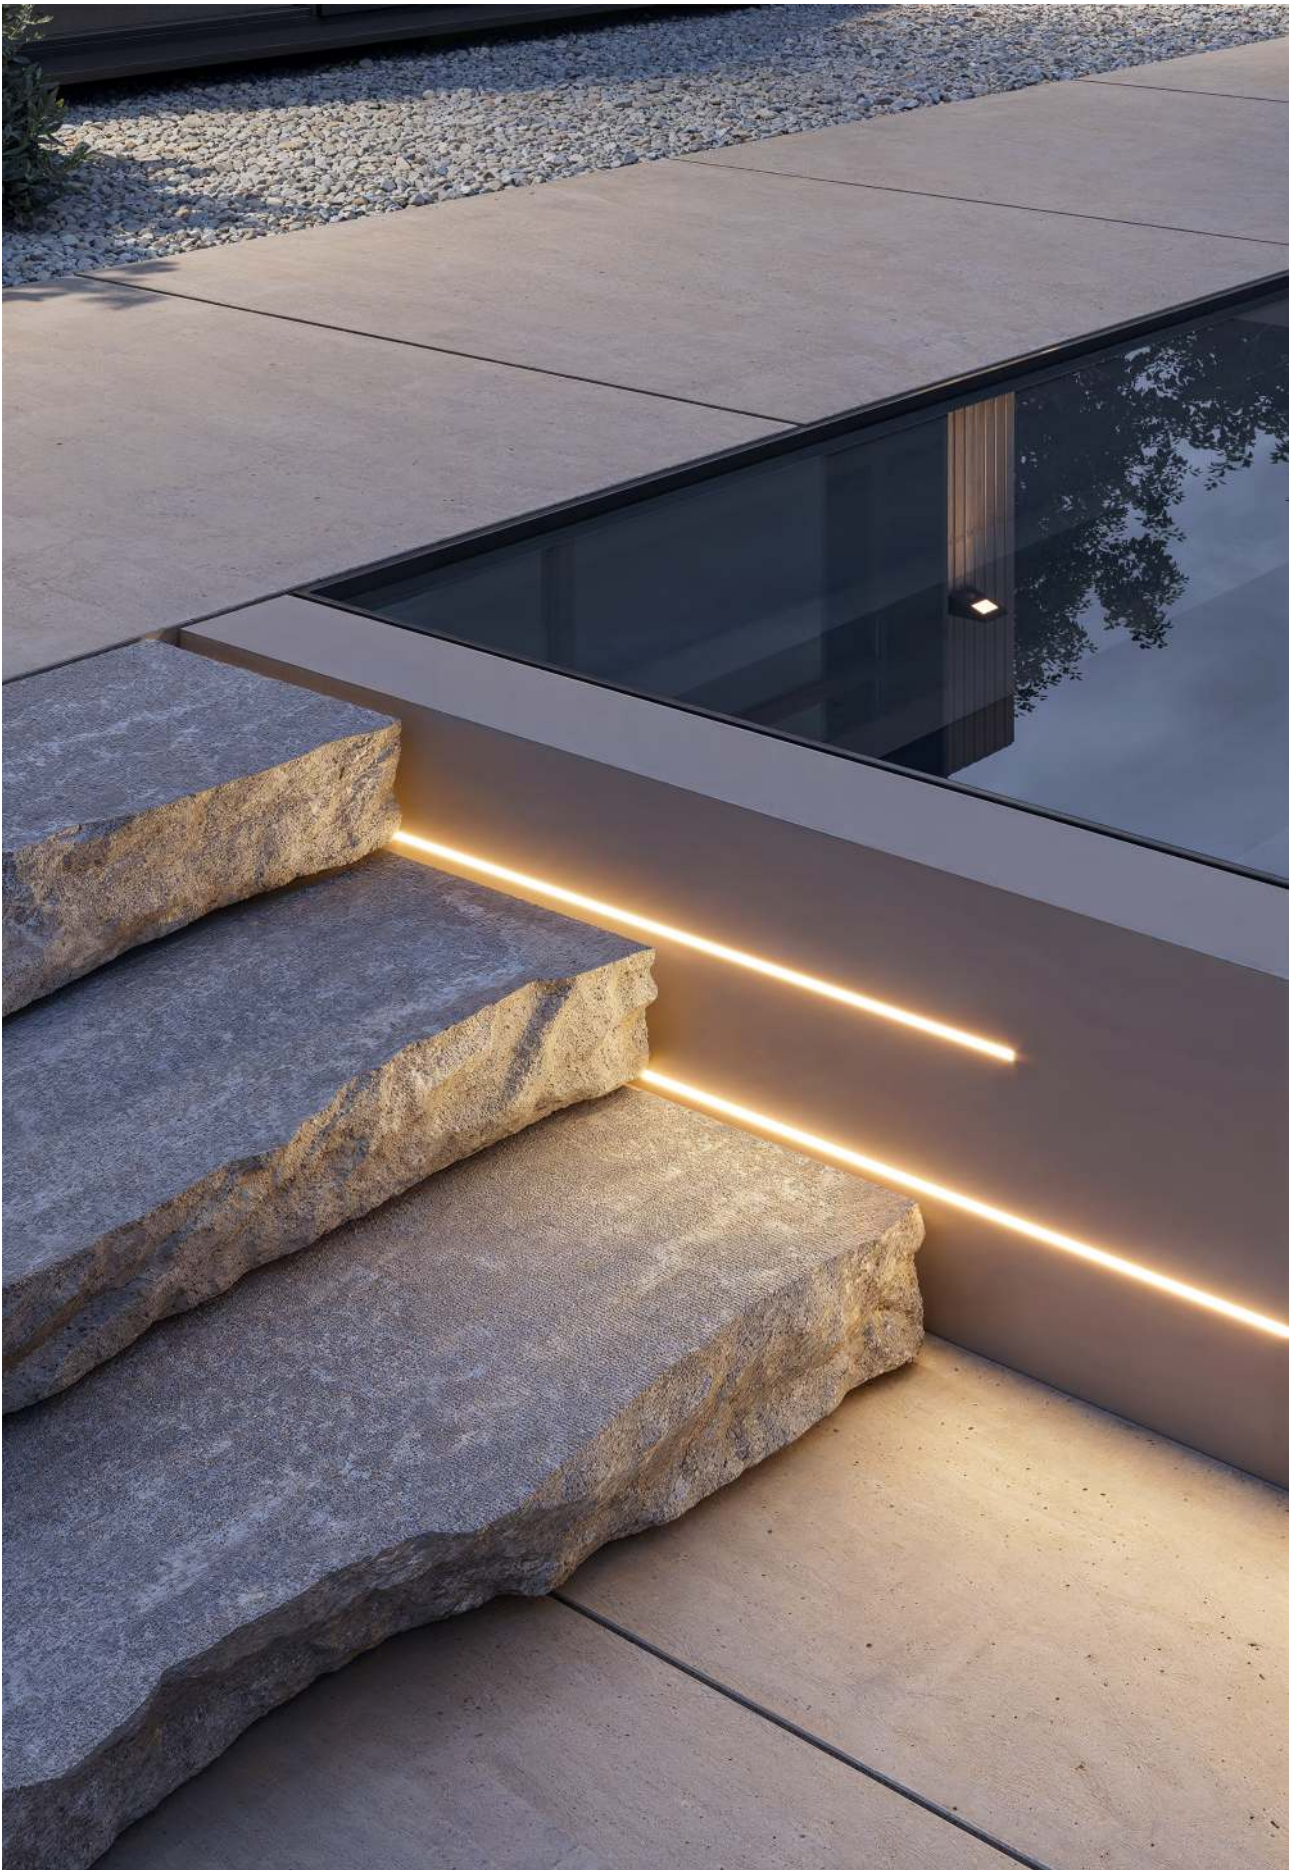

Fine 74

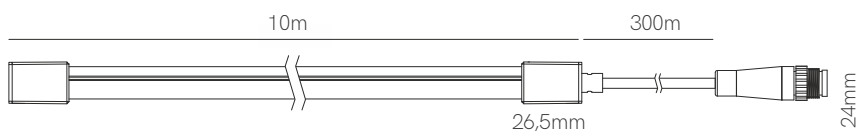

Technical Information

V / A / W 24V / 0,41A / 10W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	74277	59 lm/w	590 lm/m	2700K	IP67
	74307	62 lm/w	620 lm/m	3000K	IP67
	74407	65 lm/w	650 lm/m	4000K	IP67
	74437	22 lm/w	220 lm/m	RGB	IP67




Accessories

End Cap	End Cap	End Cap	End Cap	Clip	Clip	Clip	Extension cable
74967-L2	74967-2	74627-2	74637	20x12,7x18,7mm	1000x14,5x21,5mm	1000x13,5x18mm	77946 (Mono)
74967-L4	74967-4	74627-4		77330	77119	77350	77920 (RGB)

*Available in reel of 10 meters. Accessories pages 317-319.

New

Fine 73

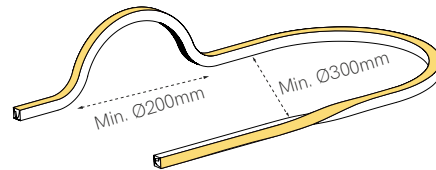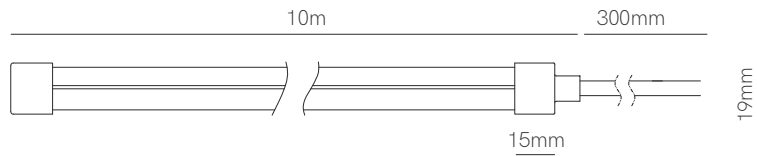


Technical Information


V / A / W 24V / 0,60A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	73277	48 lm/w	691 lm/m	2700K	IP67
	73307	51 lm/w	734 lm/m	3000K	IP67

Accessories

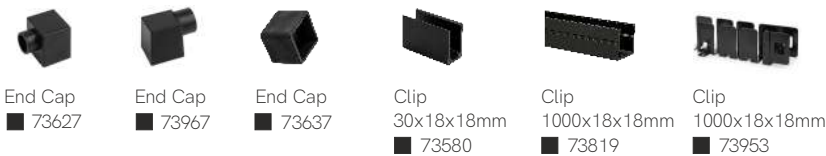

*Available in reel of 10 meters. Accessories pages 317-319.



5 YEARS WARRANTY | 14,4 W/m | 140 LED/m | 24 VDC | III | 50mm | LM-80 | 2835 | CRI ≥80 | Sun icon | Lightbulb icon | Plug icon

Led strips accessories

Cables



Parallel Cable
2x0,5mm
■ 332



Flat Sheathed Cable
2x0,5mm
○ 332PB



Round Sheathed Cable
2x0,5mm
○ 332RB
● 332RN



Round Sheathed Cable
3x0,5mm
○ 333RB
● 333RN



Parallel Cable
4x0,5mm
■ 334



Round Sheathed Cable
4x0,35mm
○ 334RB
● 334RN



Parallel Cable
5x0,5mm
■ 335



Round Sheathed Cable
5x0,35mm
○ 335RB
● 335RN



Round Sheathed Cable
6x0,22mm
○ 336

SMD / COB 8mm Monocolor IP20



Connector Cable
■ 20818



Joint
■ 20828



L Joint
■ 20838



Joint
■ 20738



Connector Cable
■ 20718



Joint
■ 20728

8mm IP67



End cap
■ 20825



End cap
■ 20865

COB 5mm



Connector Cable
■ 20518



Joint
■ 20528

SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
15,4x11,5x5,7mm
■ 20991



Joint
21,6x11,5x5,7mm
■ 20999



L Joint
19x12x5mm
■ 20C90

SMD 10mm Monocolor IP65



End Cap
○ 20635



End Cap
○ 20625



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

SMD / COB 8mm Monocolor IP20



L Joint
19x19x5mm
■ 20T90

Fine 32 / Fine 75 IP65



End Cap
■ 32635



End Cap
■ 32625



Connector kit
■ 32699



Join 180°
■ 32899



Join 90°
■ 32499



Clip
■ 32900



Joint
■ 32299

SMD / COB 10mm Monocolor IP20



Joint
■ 31709



Joint
■ 31809



Joint
■ 31909



L Joint
19x12x5mm
■ 20C90



L Joint
19x19x5mm
■ 20T90

SMD / COB 10mm IP67



End Cap
■ 32635



End Cap
■ 32625

SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
■ 20230



Joint
13,55x11,67x4,7mm
■ 20130

SMD 10mm CCT IP65



End Cap
20635



End Cap
20625



Joint
24,3x14,6x7,7mm
20235



Joint
24,3x14,6x7,7mm
20135

SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140

SMD 10mm RGB IP65



End Cap
20635



End Cap
20625



Joint
24,3x14,6x7,68mm
20245



Joint
24,3x14,6x7,68mm
20145

SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
20150



Joint
13,5x13,55x4,8mm
20250

COB 12mm RGBW IP20



Connector cable
20066



Joint
20266

SMD 5mm Monocolor IP20



Connector Cable
20049



Joint
20249

Single-wire connections



20917



20915

Bipolar connections



20927




20925

Recommended wiring

FINE 20	0,50 mm	1,00 mm	–	–	–
FINE 25	0,75 mm	1,50 mm	–	–	–
FINE 26	0,75 mm	–	–	–	–
FINE 30	1,00 mm	–	–	–	–
FINE 31	0,50 mm	1,00 mm	–	–	–
FINE 32N	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 34	0,35 mm	0,35 mm	0,50 mm	0,75 mm	–
FINE 36	0,50 mm	1,00 mm	–	–	–
FINE 37	0,50 mm	0,50 mm	1,00 mm	1,00 mm	1,50 mm
FINE 41	0,50 mm	0,75 mm	1,50 mm	–	–
FINE 42	0,50 mm	1,00 mm	–	–	–
FINE 43	0,50 mm	1,00 mm	–	–	–
FINE 44	0,50 mm	0,75 mm	–	–	–
FINE 45	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 46	0,50 mm	0,75 mm	1,50 mm	–	–
FINE 47	0,35 mm	0,75 mm	1,50 mm	–	–
FINE 48	0,35 mm	0,35 mm	0,50 mm	–	–
FINE 49	0,50 mm	–	–	–	–
FINE 50	0,35 mm	–	–	–	–
FINE 51	0,50 mm	0,75 mm	1,00 mm	1,50 mm	–
FINE 52	0,75 mm	1,50 mm	–	–	–
FINE 54	0,50 mm	0,75 mm	–	–	–
FINE 55	1,00 mm	–	–	–	–
FINE 56	0,75 mm	1,50 mm	–	–	–
FINE 60	0,35 mm	0,50 mm	–	–	–
FINE 61	0,50 mm	0,75 mm	–	–	–
FINE 63	0,50 mm	1,00 mm	–	–	–
FINE 64	0,35 mm	0,35 mm	0,50 mm	–	–
FINE 66 N	0,75 mm	1,50 mm	–	–	–
FINE 68	0,50 mm	1,00 mm	–	–	–
FINE 69	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 70	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 71	0,75 mm	1,50 mm	–	–	–
FINE 72	0,50 mm	0,75 mm	–	–	–
FINE 73	0,50 mm	0,75 mm	–	–	–
FINE 74	0,50 mm	0,75 mm	–	–	–
FINE 75	0,35 mm	0,50 mm	0,75 mm	–	–
FINE 76	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 77	0,50 mm	1,00 mm	–	–	–
FINE 79	0,35 mm	0,75 mm	1,00 mm	–	–
FINE 81	0,75 mm	1,50 mm	–	–	–
FINE 82	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 84	0,35 mm	0,35 mm	0,50 mm	0,75 mm	–
FINE 86	0,75 mm	1,50 mm	–	–	–
FINE 88	0,50 mm	1,00 mm	–	–	–
FINE 90	0,50 mm	0,75 mm	1,00 mm	–	–
FINE 91	0,50 mm	1,00 mm	–	–	–
FINE 92	0,35 mm	0,75 mm	1,00 mm	–	–
FINE 96	0,50 mm	1,00 mm	–	–	–
FINE 97	0,50 mm	0,75 mm	1,00 mm	–	–
DMX-4 / DMX5	0,50 mm	–	–	–	–
FINE RUNNING	0,50 mm	–	–	–	–
SPI-2 / SPI-3	0,50 mm	–	–	–	–
SPI-4 / SPI-5	0,75 mm	–	–	–	–

*Cable section.

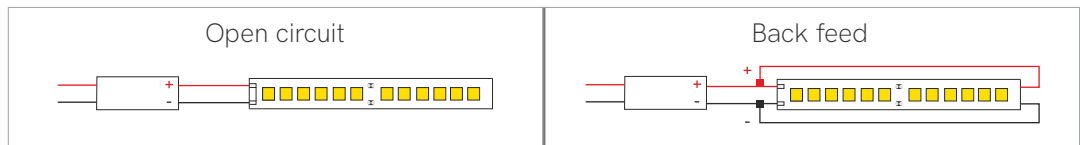

	Open circuit					Back feed				
	5 mts	10 mts	15 mts	20 mts	25 mts	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 20	100%	87%	—	—	—	100%	98%	—	—	—
FINE 25	100%	—	—	—	—	—	—	—	—	—
FINE 26	100%	—	—	—	—	—	—	—	—	—
FINE 30	100%	—	—	—	—	—	—	—	—	—
FINE 31	100%	90%	—	—	—	100%	95%	—	—	—
FINE 32N	100%	98%	95%	92%	90%	—	—	—	—	—
FINE 34	100%	100%	—	—	—	—	—	—	—	—
FINE 36	100%	86%	—	—	—	100%	93%	—	—	—
FINE 37	100%	100%	100%	95%	90%	100%	100%	100%	100%	100%
FINE 41	100%	80%	70%	—	—	100%	94%	90%	—	—
FINE 42	100%	87%	—	—	—	100%	93%	—	—	—
FINE 43	100%	—	—	—	—	100%	98%	—	—	—
FINE 44	100%	80%	—	—	—	100%	94%	—	—	—
FINE 45	100%	80%	70%	—	—	100%	94%	85%	—	—
FINE 46	100%	80%	70%	—	—	100%	94%	90%	—	—
FINE 47	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 48	100%	100%	85%	—	—	100%	100%	96%	—	—
FINE 49	100%	—	—	—	—	—	—	—	—	—
FINE 50	100%	—	—	—	—	—	—	—	—	—
FINE 51	100%	100%	100%	100%	—	—	—	—	—	—
FINE 52	100%	90%	—	—	—	100%	98%	—	—	—
FINE 54	100%	80%	—	—	—	100%	90%	—	—	—
FINE 55	100%	80%	—	—	—	100%	95%	—	—	—
FINE 56	100%	80%	—	—	—	100%	95%	—	—	—
FINE 60	100%	90%	—	—	—	100%	98%	—	—	—
FINE 61	100%	90%	80%	—	—	100%	98%	92%	—	—
FINE 63	100%	80%	—	—	—	100%	92%	—	—	—
FINE 64	100%	100%	90%	—	—	100%	100%	96%	—	—
FINE 66 N	100%	88%	—	—	—	100%	95%	—	—	—
FINE 68	100%	95%	—	—	—	100%	100%	—	—	—
FINE 69	100%	95%	90%	85%	—	100%	100%	95%	95%	—
FINE 70	100%	—	—	—	—	—	—	—	—	—
FINE 71	100%	87%	—	—	—	100%	97%	—	—	—
FINE 72	100%	—	—	—	—	—	—	—	—	—
FINE 73	100%	87%	—	—	—	—	—	—	—	—
FINE 74	100%	—	—	—	—	—	—	—	—	—
FINE 75	100%	98%	95%	92%	90%	—	—	—	—	—
FINE 76	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 77	100%	—	—	—	—	—	—	—	—	—
FINE 79	100%	90%	85%	—	—	100%	97%	95%	—	—
FINE 81	100%	87%	—	—	—	100%	97%	—	—	—
FINE 82	100%	100%	85%	—	—	100%	100%	90%	—	—
FINE 84	100%	95%	90%	85%	—	100%	100%	95%	95%	—
FINE 86	100%	88%	—	—	—	100%	95%	—	—	—
FINE 88	100%	—	—	—	—	—	—	—	—	—
FINE 90	100%	90%	80%	—	—	100%	98%	93%	—	—
FINE 91	100%	87%	—	—	—	100%	98%	—	—	—
FINE 92	100%	100%	85%	—	—	100%	100%	90%	—	—
FINE 96	100%	80%	—	—	—	100%	95%	—	—	—
FINE 97	100%	95%	90%	—	—	100%	100%	95%	—	—
DMX-4 / DMX-5	100%	—	—	—	—	—	—	—	—	—
FINE RUNNING	100%	—	—	—	—	—	—	—	—	—
SPI-2 / SPI-3	100%	—	—	—	—	—	—	—	—	—
SPI-4 / SPI-5	100%	—	—	—	—	—	—	—	—	—

*Efficiency (%).