
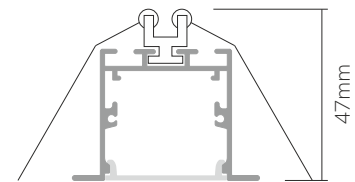




Kubo E



Control accessories pages 282-289.


*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Technical Information

Power	31W / 38W / 46W / 54W
Lumen	3.100 lm - 6.264 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 5	Opal (100°) 5	1.130mm 3	2.700K (100 lm/W) - 27W/m 2	On / Off 1	<input type="checkbox"/> White (9003) 1
		1.410mm 4	3.000K (105 lm/W) - 27W/m 3	Dali 2	<input checked="" type="checkbox"/> Black (9005) 2
		1.690mm 5	4.000K (111 lm/W) - 27W/m 4	Push 3	<input checked="" type="checkbox"/> Custom RAL C
		1.970mm 6	5.000K (116 lm/W) - 27W/m 5	Casambi 5	
			RGB-W (100 lm/W) - 20W/m 8	Tuya 7	
			2.700-5.500K (105 lm/W) - 40W/m 9		

Code: **5** **5**



Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.

